


PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION.
PLEASE RETAIN INSTRUCTIONS FOR FUTURE REFERENCE.

Blade Martec Surface Mounted Light

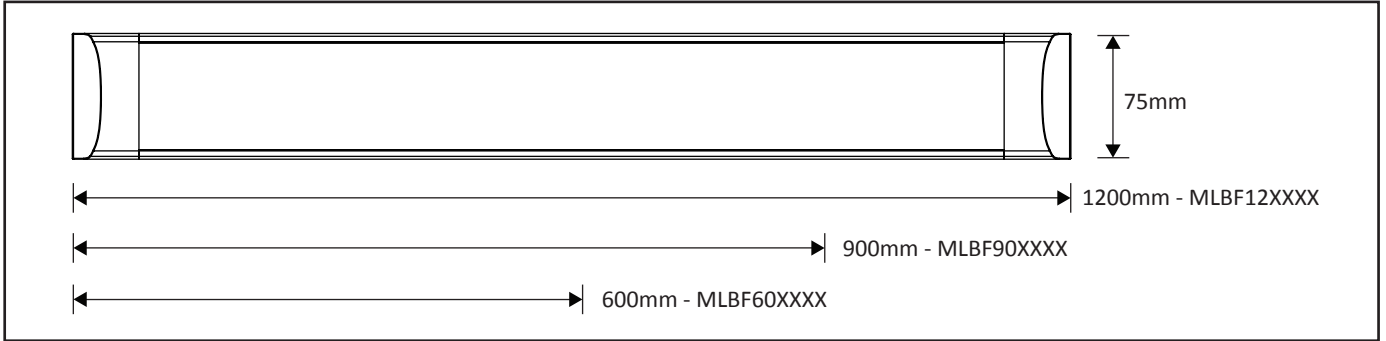

Thank you for purchasing the Blade Surface Mounted LED fitting.


INSTALLATION

- This unit **MUST** be installed by a licensed electrician to comply with the relevant Australian/New Zealand standards.
- Disconnect the main supply prior to wiring.


Step 1. Gently remove the end cap and diffuser from the main body.




Step 2. Screw the main body directly to the ceiling using the screw slots.

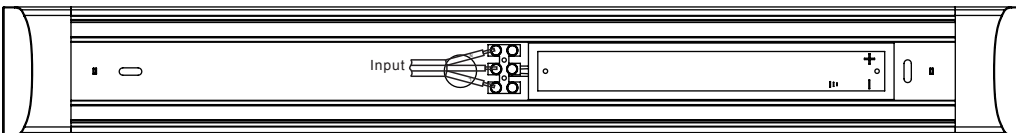

Step 3 Terminate input wires into the terminal block in the centre of the fitting.

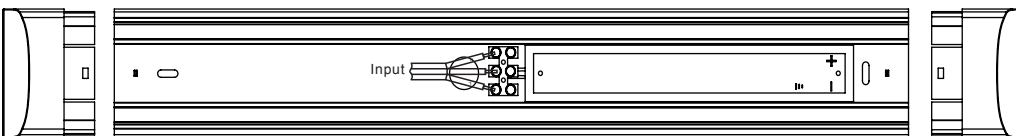

Step 4. Gently refit the end cap and diffuser.

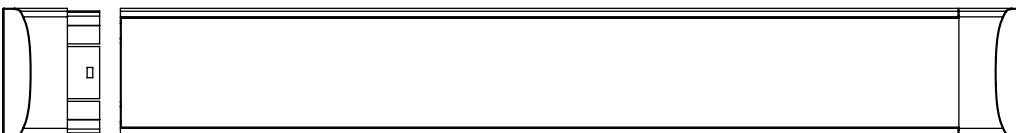

PRODUCT FEATURES

- 3 year replacement warranty
- Long life energy saving LED technology
- Dimmable LED light module (Dimming reduces to 10% with MTD300VA)
- Easy Installation
- Terminal block connection conveniently located in the centre of the fitting

DIMMING

The Blade Surface Mounted light can be dimmed to 10%.

Martec LED fittings are compatible and supported with the Martec MTD300VA dimmer, if dimmable model.

All other dimmers may work, but are not supported by Martec.