

MODEL :TLEEC360 (Box Type)



APPLICATION:

This LED Exit is intended for connection to an unswitched active supply. When mains power is available, the LED lamp is lit and the green charge indicator LED is ON. Mains power provides continuous charge to the rechargeable batteries. When mains is disrupted, the LED lamps receive supply from the internal batteries and remains illuminated automatically.

SPECIFICATIONS:

Model	TLEEC360
Input Voltage	220-240VAC 50/60Hz
Light Source	3W LED Strip
Battery	LiFePO ₄
Autonomy	> 120 minute
Mounting	Wall / Ceiling Mount / Suspended Mount
Temperature	0°C - 40°C
IP Rating	IP20
Mode	Maintained
Material	Flame Retardant Polycarbonate
Classification	C0:D4: C90:D3.2
Warranty	2 years

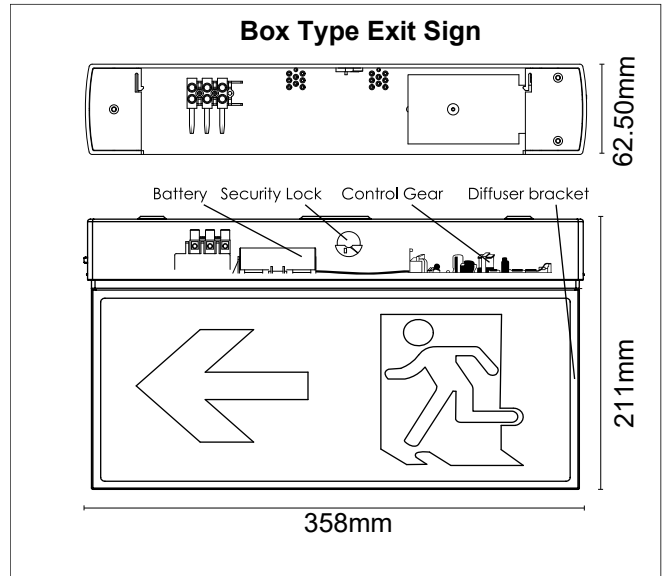


FIGURE 1

INSTALLATION :

1. Unpack the fitting and inspect for any visible damage. If damage is found, repack the goods and return it to your point of sale for replacement.
2. On passing the visual inspection, place the mounting bracket at the desired wall or ceiling location. Then, mark the position of the screw holes and cable entry position through the bracket as required. Provide sufficient free space on either side of the bracket to allow for a seamless connection or removal of the fitting into the mounting bracket.
NOTE: holes for wall mounting must be drilled manually prior to marking.
3. Remove the bracket to show the hole markings. Drill a 20mm hole for the cable entry. Make sure the mounting screw locations are against solid material to support the weight of the fitting. Use appropriate fasteners suitable to the construction material. Install the bracket (Fig.2)
4. Run the cables through the cable hole of the mounting bracket. Strip, connect and terminate the cables as per Figure 3. Ensure that the insulation of the cables passes completely into the terminal block, safeguarding against exposed conductors.
5. All fittings are supplied with pack of Running Man decals for single or double sided applications. **It is not necessary to remove the diffuser bracket to insert the desired Running Man decal.** Refer to Figure 4 for detailed instructions.
6. Slide the fitting into the mounting bracket by holding the unit parallel with the bracket. Ensure a firm fit to engage the connection. Secure the fitting by using a screwdriver and turning the security lock to the 'Lock' position.
7. Once mains supply is present, the LEDs and green charge indicator LED will energise and remain lit. Allow a few minutes for the battery to receive a small charge, then press and hold the manual test switch button located on the side of the unit for a few seconds and observe the operation of the LEDs switching from mains to emergency mode.
8. Under normal operation conditions, the emergency function of the fitting will automatically operate when there is loss of supply to the normal lighting circuit.

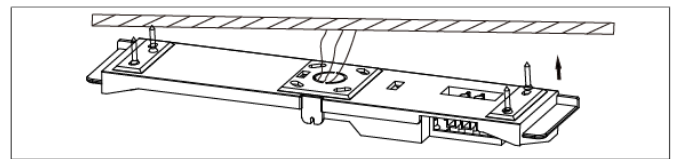


FIGURE 2

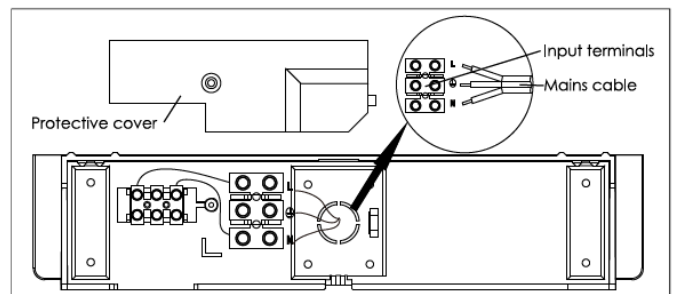


FIGURE 3

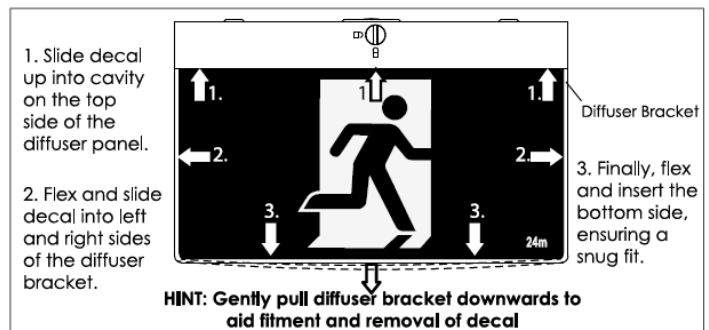


FIGURE 4

DIAGRAM



Please Note: Recess Kit TLEREC sold separately.

MARTEC PTY LTD: 2 YEAR REPLACEMENT WARRANTY STATEMENT*

WARRANTY STATEMENT:

Martec Pty Ltd warrants this product for a period of 2 years "Replacement" warranty from the original date of purchase for residential situations only :

IMPORTANT NOTICE: MARTEC PTY LTD WARRANTS THIS PRODUCT FOR 2 YEARS WITH A "2 YEAR REPLACEMENT WARRANTY. MARTEC PTY LTD ONLY WARRANTS THE MARTEC PRODUCT AGAINST FAULTY WORKMANSHIP AND SUBJECT TO THE CONDITIONS AND PROVISIONS SET OUT BELOW:

1. The 2 year "Replacement" warranty applies only if the product was purchased in Australia and does not transfer from the original purchaser. All Martec Products replaced under "replacement" warranty are only warranted for the balance of the initial warranty replacement period.
2. Any changes to plated, ABS, Polycarbonate or painted finishes due to climate conditions or other circumstances deemed to be beyond the control of Martec Pty Ltd or their authorised agent are not covered under this warranty.
3. Any claim made in relation to this warranty is solely limited to the replacement of the product only, parts and labour of the authorised service agent approved by Martec Pty Ltd. No parts/products are to be disposed of prior to warranty approval. No acceptance of other liability for incidental or consequential damage is covered. Martec Pty Ltd does not cover travelling costs incurred by service agents where service is requested by the purchaser outside of the Martec Pty Ltd service network. The Martec Pty Ltd service network is defined at our discretion yet is limited by the boundary of the city in which you live. Travel outside of the city limits by the Martec Pty Ltd authorised service agent will incur commercial costs to be paid for by the purchaser at a rate calculated by the number of kilometres travelled beyond the city limits. Any service required outside of the service network will be provided in the following manner Per warranty claim, a full replacement will be sent to the customer's residence and a maximum of \$80AUD plus GST plus freight will be covered by Martec Pty Ltd. All other costs over and above the \$80AUD, including but not limited to, labour and travel costs are to be paid for by the purchaser. Please Note: it is the responsibility of the purchaser to call Martec customer service number (02 8778 7500) prior to any electrician leaving the job site if any problems occur. Any installing electrician costs and/or fees invoiced to the customer prior to the customer contacting Martec to lodge a warranty application will not be covered by Martec.
4. This warranty becomes void if the product was not installed as per the instruction manual by a qualified and licensed electrician. In addition, this warranty will be considered void if any, or all, of the following has occurred: tampering with the product, product damage, repair by non-qualified electrician, becoming faulty due to improper use, normal wear and tear, accident damage, product abuse, and/or failure to use the product in accordance with the instructions relating to the installation.
5. Repairs carried out by the Martec approved service agent due to incorrect installation will be charged to the purchaser at the time of service. This warranty is limited to the product being repaired/replaced only by an approved Martec Pty Ltd service agent and does not include costs where the original installation was not carried out per the instruction manual. The product warranty is limited to defects in workmanship only and does not apply to loss or damage caused by abnormal or excessive force of any kind from internal or external sources.
6. Martec Pty Ltd reserves the right to change or amend any or all parts of this warranty statement at any time and without notice.
7. The costs associated with the hire of extension ladders and scaffolding to service ceiling fans or lighting luminaires been installed on ceilings higher than 3 metres from the ground, will not be covered by this warranty. These costs will be borne by the customer not Martec Pty Ltd.

**CUSTOMER SERVICE LOCAL NUMBER
(PHONE) 02 8778 7500**

**CUSTOMER SERVICE
(FAX) 02 8778 7555**

**CUSTOMER SERVICE OPERATES BETWEEN
8AM TO 5PM EST MONDAY THROUGH FRIDAY**

**IMPORTANT: PLEASE DO NOT PHONE THE RETAILER FOR WARRANTY WORK. INSTEAD PHONE THE
CUSTOMER SERVICE NUMBER FOUND ABOVE.**

MARTEC PTY LTD | 6 AUSTOOL PL, INGLEBURN NSW 2565 | PH: 02 8778 7500 | FAX: 02 8778 7555