



by /// MARTEC

ECLIPSE II LED OYSTER LIGHT INSTALLATION INSTRUCTIONS

TLEO34515WD - TLEO34518WD - TLEO34528WD

NOTICE

The below listed products are suitable for both indoor and outdoor use. However, as the product is only IP54 rated, water and/or rain cannot make direct contact with the unit. Use of the unit under a pergola or roof will prevent the unit from being directly exposed to water elements, is acceptable. Change to finish of the unit, as a result of climate are not covered under warranty.

MODEL SPECIFICATIONS

Model	TLEO34515WD	TLEO34518WD	TLEO34528WD
Power	15W	18W	28W
Input Voltage	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Input Current	64-69mA	80mA	115mA
Power Factor	0.9	0.9	0.9
Beam Angle	110°	110°	110°
Ingress Protection	IP54	IP54	IP54

FEATURES

- Dimmable LED light module (Dimming reduces to 10% with MTD300VA)
- High light output, low energy consumption.
- IP54 rated for use in undercover, outdoor environments.

INSTALLATION INSTRUCTIONS


NOTE: This product must be installed by a licensed electrician.

1. Ensure the Main Supply is switched OFF.
2. Remove the Eclipse oyster from its packaging.
3. Part light cover from light base by rotating the light cover counterclockwise.
4. Drill two holes in the wall or ceiling using data of diagram 4. Exercise Caution to avoid drilling into existing electrical wiring.
5. Insert expanding screws provided into drilled holes.
6. Measure appropriate length for power cord in installation position and strip the power cord and cable skin. Pass power cord through the light base. Now, using the screws provided, attach the light base to the wall or ceiling.
7. Pass the power cord through cable clamp. Connect the L,N according to the marking on the push fit terminal.
8. Connect quick fit terminal of light base and light cover. Select desired CCT by toggling the switch on the back of the fitting.
9. The arrowhead symbol of light base line up with the arrowhead symbol of light cover.
10. Connect light base with light cover by rotating the light cover clockwise. Fixed the screw onto the lamp after installation.
11. Reconnect the mains supply.
12. Turn on the ceiling light.


ATTENTION

- Please read the product specifications carefully and ensure that the area for the unit to be fitted to meets the conditions of the specifications.
- Do not install the unit on unstable or rough surfaces.
- During installation, do not press on the diffuser covering the LED chips, in order to prevent damage to the LED.
- Do not install near sources that emit heat or steam, or corrosive gases as this will affect the life expectancy.
- Installation of unit must be done by a qualified electrical contractor.
- To clean the diffuser of the unit use a soft cloth with soapy water. Dry immediately after cleaning.
- Do not use thinners, gasoline or other corrosive liquids to clean diffuser as this will significantly damage the unit.
- To maintain IP rating rubber seal around terminal block must be used.


TLEO34515WD

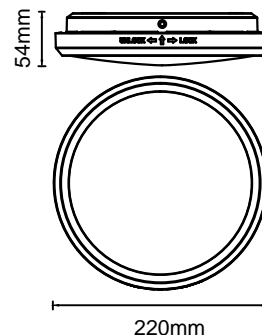

TLEO34518WD

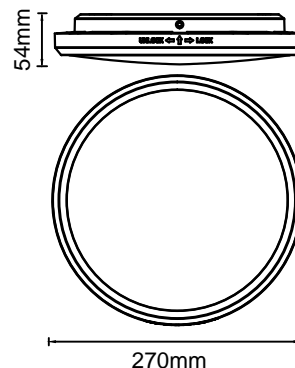

TLEO34528WD

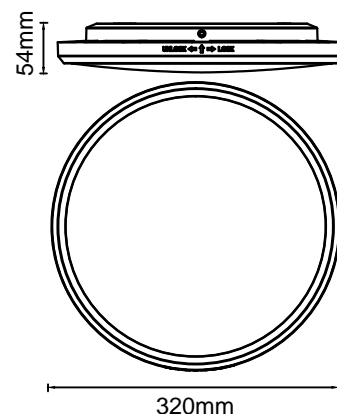

ECLIPSE II LED OYSTER LIGHT INSTALLATION DIAGRAM

TLEO34515WD - TLEO34518WD - TLEO34528WD

