




# Diffused Emergency Batten

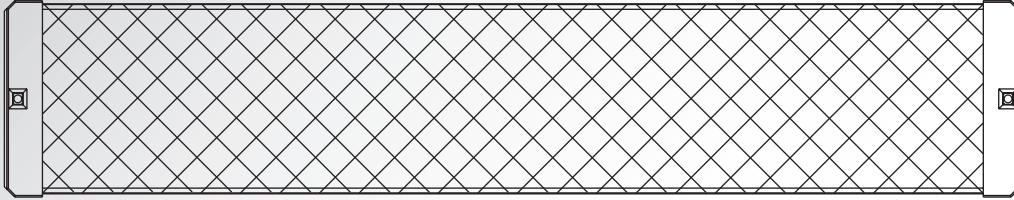

## ORDERING INFORMATION

General	
Code	TLDE2105   TLDE2185
Description	LED Tube Emergency Diffused Batten
Barcode Number	9312375505792   9312375505808

## OPERATIONAL INFORMATION

General	
Mounting	Surface Mount
Operating Voltage	240V AC, 50Hz
Operating Mode	Sustained
Testing System	Manual Test Switch
Charging Method	Intelligent current limited constant voltage charge
Diffuser	K12 Prismatic
Lamp(s)	2 x Cetram LED Tube T8, Col. 5000K, 2400lm 30,000 hours
IP Rating	IP20
Operating Temperature	1°C to 40°C
IK Rating	IK10
AS/NZ2293 Classification	C0=D40 C90=D40

## BATTERY

General	
Battery Type	Ni-Cd
Battery Voltage	4.8V
Charging Time	16 Hours
Charging Type	Variable