

10W TRICOLOUR LED DOWNLIGHT




Model Numbers


TLCD34510WD / TLCD34510MD

Features

- Low glare and aesthetically designed
- Aluminium housing with recessed reflector
- Ideal for residential, apartments and internal application
- Ø90mm cutout size
- IP44 ingress protection (front only)
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature 3000K, 4000K and 5000K
- Supplied with 1m flex and plug for simple installation

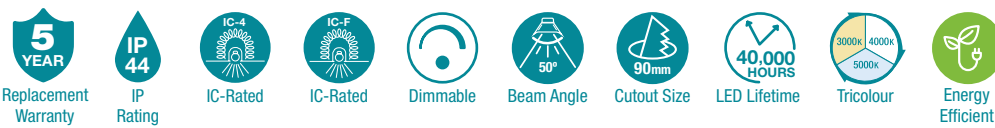

DIMENSIONS

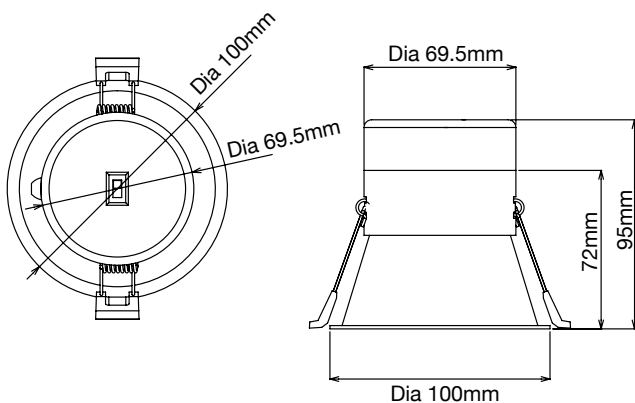

10W TRICOLOUR LED DOWNLIGHT

PACKAGING



SPECIFICATIONS

Model Name	Class II
Model Numbers	TLCD34510WD TLCD34510MD
Power Wattage	10W
Voltage	220-240V~50Hz
Materials / Housing	High quality die cast aluminium construction
Cutout Size	Dia 90mm
Colour Temperature	3000K, 4000K, 5000K
Lumens Output	750lm/800lm/830lm (TLCD34510WD) 700lm/750lm/780lm (TLCD34510MD)
IP Rating	IP44
Beam Angle	50°
CRI	Ra>80
Rated Lifetime	40,000 hours @ Ta25°C
Dimmable	Yes
Flex and Plug	Yes
Sensor	N/A

INSTALLATION



Installation	By licensed electrician only
Warranty	5 year replacement warranty

*For further information regarding warranty terms and conditions, please refer to enclosed warranty statement.
Warranty is void unless installed by a licensed electrician.


SHIPPING

Packaging size	TLCD34510WD	125(H) x 110(W) x 115(L)mm
	TLCD34510MD	125(H) x 110(W) x 115(L)mm
Carton quantity	24	
Gross weight	TLCD34510WD	10.0kg
	TLCD34510MD	10.0kg

AVAILABLE COLOURS



Model	Colour	Barcode
TLCD34510WD	Matt White	 9 312375 505563

Model	Colour	Barcode
TLCD34510MD	Matt Black	 9 312375 505570