



Replacement
Warranty*

**20W TRICOLOUR
LED BATTEN LIGHT**

TLDB34620



**ENERGY
EFFICIENT
TUBELESS
DESIGN**

This Tricolour LED batten features an energy efficient tubeless design as well as a shatter resistant polycarbonate diffuser. Making this batten ideal for use in carparks, garages, security areas, workshops, factories, industrial environments, stairwells, corridors, storage areas, schools and public amenities.

- **Lightweight powder coated aluminium housing**
- **Surface mount directly to ceiling without visible brackets**
- **Shatter resistant polycarbonate diffuser**
- **Direct mounting (no brackets required)**
- **20W Tricolour LED light**

Tricolour
LED

20W
2000
LUMENS

110°-
130°
Beam
Angle

Non
Dimmable


**IP
20**
IP
Rating

≥80
CRI

INCLUDES

DIMENSIONS

Main body
& screw pack

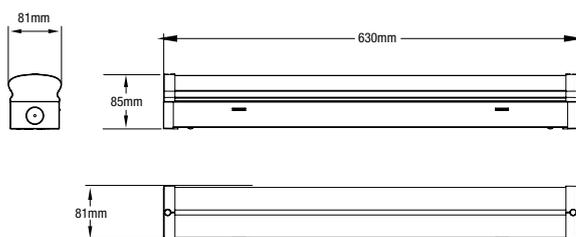


AAI Figure

Flux out: 1158 1m

Height	Eavg,EmaxA	ngle:104.11deg	Diameter
1m	209.2,566.81x		256.51cm
2m	52.31,141.71x		513.01cm
3m	23.25,62.981x		769.52cm
4m	13.08,35.421x		1026.02cm
5m	8.370,22.671x		1282.53cm

Product No: TLDB34620 AAI Figure at 4000k CCT

Luminous Intensity Distribution Diagram

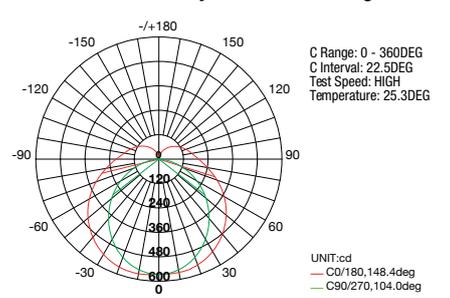

AVERAGE BEAM ANGLE(50%):126.2 DEG

Product No: TLDB34620 Luminous Intensity Measure at 4000k CCT



Aust/NZ Approval No.
EESS-190475-0



9312375506690



TLDB34620

20W TRICOLOUR LED BATTEN LIGHT

FEATURES

- Surface mounted LED batten light
- Lightweight powder coated aluminium housing
- Shatter resistant polycarbonate diffuser
- Direct mounting (no brackets required)
- Provides excellent light distribution using Tricolour SMD LED technology
- Select either 3000k, 4000k, or 6500k light colour temperature setting

SPECIFICATIONS

Model name	20W Tricolour LED Batten Light 630mm
Model number	TLDB34620
Power (wattage)	20W
Voltage	220v-240v
Frequency	50Hz
Switchable Tricolour lumens	2000lm max
Colour temperature	3000k / 4000k / 6500k
LED light beam angle	110°-130°
Product size (mm)	630 x 75 x 85
Material	Shatter resistant polycarbonate diffuser
LED Type	SMD LED
CRI	≥80
Approximate lamp life	30,000hrs
Weather resistance rating	IP20
Operating temperature	-20°C to +40°C



INSTALLATION

Installation	By licensed electrician only
Warranty	2 year replacement warranty*

* For further information regarding warranty terms and conditions, please refer to enclosed warranty statement.

SHIPPING

Packaging size	676 x 88 x 85mm
Gross weight	7.9kg
Carton qty	6

AVAILABLE IN WHITE



White

Model	Colour	Barcode
TLDB34620	White	 9312375506690