



PRODUCT CATALOGUE 2021





After more than five decades Martec® has become one of Australia's leading providers of cooling, lighting, heating and exhaust products. Our focus has always been on providing our customers with the highest quality, best in class and competitively priced products and solutions to suit every lifestyle.

Our relentless dedication to continuing development, puts Martec® at the forefront of innovation and design. With the latest technology, Martec® now offers an exciting and comprehensive range of energy efficient, cost saving products which can be installed in any applications.




**Providing Australia
with high quality,
value for money
products for over
50 years.**

The Martec® Promise

A strong commitment to the principles of quality, service and attention to detail ensures we transform these values into unique and dynamic outcomes that are second to none. In order to attain and maintain these objectives, Martec® has implemented a quality management process and system which meets the requirements of AS/NZS ISO 9001. In summary, Martec® is committed to providing an unrivalled product and service offer to its many valued customers.

Our Brands...

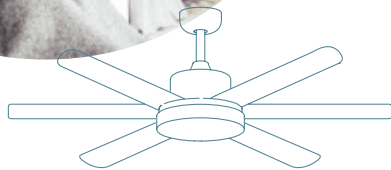


MARTEC®
Cooling

Martec® Cooling offer an extensive range of AC and DC ceiling fans, and accessories to suit a wide range of applications.

Martec® ceiling fans come in a wide selection of colours and sizes, as well as changeable colour temperature and 3 steps dimming features for fans with LED lights. Our ceilings fans are highly energy efficient and quiet, and come with a summer/winter mode option.

Ceiling fan accessories that include lights, downrods, and remote controls with timer. We do have a solution to meet your needs and enhance your lifestyle.

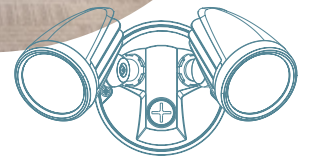


MARTEC®
Lighting

Martec® Lighting offer an extensive range of LED products from downlights, surface mounted fitting to exterior lighting.

Our downlights and surface mounted products are come with switchable colour temperature change and with dimming options, available using Martec® dimmers. Our exterior lighting come with different ingress protection rating and built in motion sensor option provide security and safety in all outdoor application. Plus, the Tradetec range offers product with outstanding quality, ease of installation and competitive prices, all available from your local wholesaler.


Martec® Lighting can fulfil smaller and larger projects within your budget and needs.

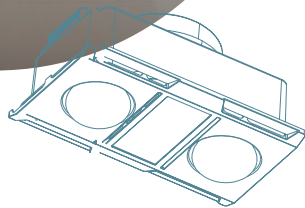

 **MARTEC**[®]
Heating

Martec[®] Heating offer an extensive range of bathroom heaters and accessories to suit any bathroom sizes and applications.

Martec[®] bathroom heaters come in a wide variety from a simple single heat lamp unit, to slimline designed 3-in-1 heaters. Our instant heat option configures from 1 or 2 or 4 heat lamps to tricolour LED lights. Along with different IPX rating and colour finishes enable our heaters to compliment any design scheme and environment at your home.



 **MARTEC**[®]
Exhaust

Martec[®] Exhaust offer a range of exhaust fans to any bathroom sizes and other area applications.

Martec[®] exhaust fans feature different sizes, IPX rating, shape, and tricolour LED light option. Our exhaust fans are operated on high performance ball bearing motor with superior blade design for maximum air extraction – quiet operations. Plus, always supplied with flex and plug made installation easier.



CONTENTS

MARTEC® COOLING.....6

| | |
|-------------------------------|----|
| DC Ceiling Fans | 8 |
| AC Ceiling Fans | 28 |
| Ceiling Fan Accessories | 60 |

MARTEC® LIGHTING64

| | |
|--------------------------------|----|
| Downlights | 66 |
| Surface Mounted Lighting | 75 |
| Exterior Lighting | 83 |
| Dimmers | 97 |
| Tradetec | 98 |

MARTEC® HEATING.....104

| | |
|---------------------------|-----|
| Bathroom Heaters | 106 |
| Exhaust Fans | 122 |
| Heating Accessories | 130 |

| | |
|----------------------|-----|
| LEducation | 132 |
| Warranty Guide | 133 |
| Fan Size Guide..... | 133 |
| Product Index | 134 |





DC CEILING FANS



NEWPORT DC
Page 10



WAVE DC
Page 12



ZODIAC DC
Page 14



SCORPION DC
Page 16



MALIBU DC
Page 18



ALBATROSS DC
Page 20



LINK DC
Page 24



LIFESTYLE DC
Page 26

AC CEILING FANS



ELITE AC
Page 30



GOVERNOR AC
Page 32



TRIUMPH AC
Page 34



FLUSH AC
Page 36



CRUISE AC
Page 38



DISCOVERY AC
Page 40



RAZOR AC
Page 42



LIBERTY AC
Page 44



LIFESTYLE AC
Page 46



LINK AC
Page 50



**OASIS AC |
HAMILTON AC**
Page 52



PRECISION AC
Page 54



ALPHA AC
Page 56



TRISERA AC
Page 58

ACCESSORIES



**PREMIER
REMOTE
CONTROL KIT**
Page 62



**LCD REMOTE
CONTROL KIT**
Page 62



**INFRA-RED
REMOTE
CONTROL KIT**
Page 63



**SMART REMOTE
CONTROL KIT**
Page 63





DC CEILING FANS

ADVANTAGES OF DC MOTOR CEILING FANS

High Efficiency

DC motors on average consumes less energy than conventional ceiling fan motors.

Speed Control

DC motor control provides up to 5 or 6 speed settings and an easy to use reversing function for summer and winter operation.

Light Weight

DC motors weigh less than conventional fan motors, resulting in a lighter product that is easier to install for electricians.

Quiet Operation

DC motors are very quiet when in operation, ideal for bedrooms.

Remote Control:

DC ceiling fans can only be operated via a DC remote control (supplied).



Warranty

Energy
Efficient

35W

DC Motor

DC / 8hr Timer
Quick Connect
Remote ControlSummer/Winter
Reverse
Function

15°

Blade Pitch

Hangsure
CanopyQuiet
OperationNON
RUSTABS
BladesIndoor Cover
Outdoor UseTropical
Rated

Tricolour

3 Step Switch
Dimming

NEWPORT DC



Fan Only Walnut



Fan Only White



Fan with LED Light Walnut



Fan with LED Light White



Fan with LED Light Matt Black



FEATURES

- Brushless quiet DC motor
- 5 Speed remote control included
- Up to 8 hour timer function
- 15° blade pitch
- Suitable for coastal conditions tropical rated
- Indoor or enclosed alfresco installation
- Reversible summer or winter mode
- 18W Tricolour step dimmable
3000K – 4000K – 5000K





Newport 1420mm 56"

13,000m³/hr
 Maximum Airflow


| SPECIFICATIONS | FAN ONLY | FAN WITH LED LIGHT |
|----------------|---------------|--------------------|
| BLADE DIAMETER | 1420mm 56" | 1420mm 56" |
| HEIGHT | 264mm | 272mm |
| LUMEN OUTPUT | - | 1780lm |
| MODEL | ORDERING CODE | |
| WALNUT | MNF1430WR | MNF14330WR |
| WHITE | MNF143WWR | MNF1433WWR |
| MATT BLACK | MNF143MMR | MNF1433MMR |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|-------------------------------------|---------------|
| 900mm Downrod White Satin 25mm dia | MDRD36WST |
| 900mm Downrod Old Bronze 25mm dia | MDRD36OT |
| 900mm Downrod Matt Black 25mm dia | MDRD36MT |
| 1800mm Downrod White Satin 25mm dia | MDRD72WST |
| 1800mm Downrod Old Bronze 25mm dia | MDRD72OT |
| 1800mm Downrod Matt Black 25mm dia | MDRD72MT |

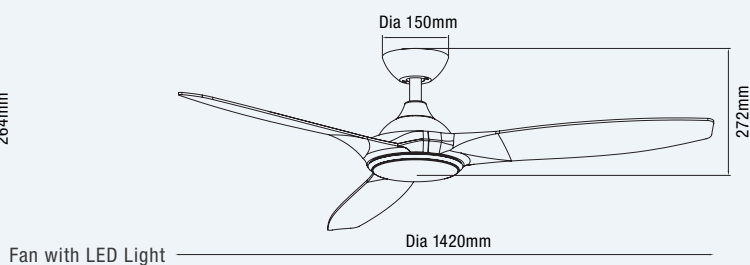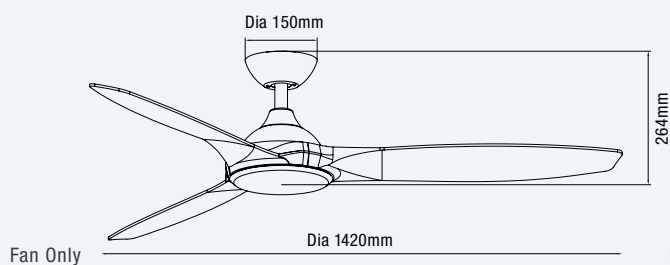



Warranty

Energy
Efficient

DC Motor

DC / 8hr Timer
Quick Connect
Remote ControlSummer/Winter
Reverse
Function

Blade Pitch

Hangsure
Canopy

Tricolour

3 Step Switch
Dimming

WAVE DC



Fan Only Titanium Satin



Fan with LED Light Titanium Satin



Fan with LED Light White Satin

FEATURES

- Brushless quiet DC motor
- Energy efficient
- 5 speed DC remote control included
- Up to 8 hour timer function
- Reversible summer or winter mode
- Electronically balanced blades
- Moulded ABS blades
- 13° blade pitch
- Suitable for coastal conditions tropical rated
- Indoor or enclosed alfresco installation
- 18W Tricolour step dimmable
3000K – 4000K – 5000K

*Air movement as shown in table is based on 60" (1500mm) blade models.



Wave 1320mm 52"

Wave 1520mm 60"

12,500m³/hr

Maximum Airflow

**13,500m³/hr**



Maximum Airflow



| SPECIFICATIONS | FAN ONLY | | FAN WITH LED LIGHT | |
|---------------------------------|---------------|------------|--------------------|------------|
| BLADE DIAMETER | 1320mm 52" | 1520mm 60" | 1320mm 52" | 1520mm 60" |
| HEIGHT | 342mm | | 348mm | |
| LUMEN OUTPUT (LIGHT MODEL ONLY) | - | | 1780lm | |
| MODEL | ORDERING CODE | | | |
| TITANIUM SATIN | MWF133TSR | MWF163TSR | MWF1333TSR | MWF1633TSR |
| WHITE SATIN | MWF133WSR | MWF163WSR | MWF1333WSR | MWF1633WSR |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|-------------------------------|---------------|
| 900mm Downrod Titanium Satin | MDRD36TS |
| 900mm Downrod White Satin | MDRD36WS |
| 1800mm Downrod Titanium Satin | MDRD72TS |
| 1800mm Downrod White Satin | MDRD72WS |

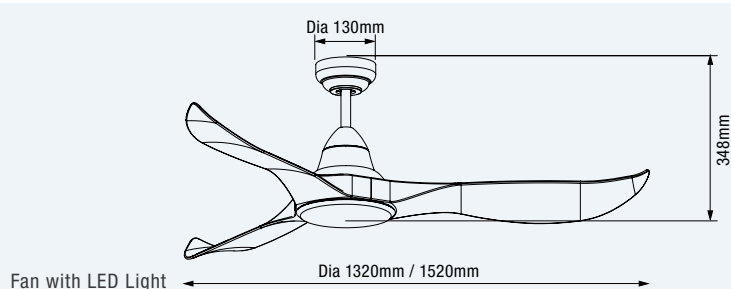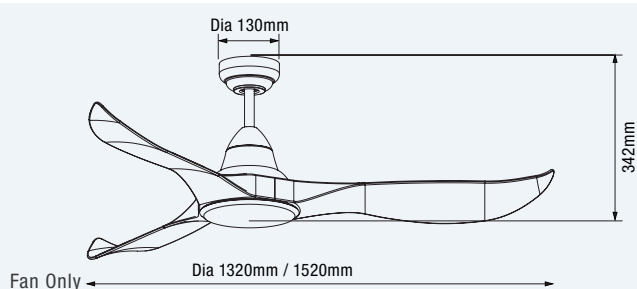



Warranty

Energy
Efficient

DC Motor

DC / 8hr Timer
Quick Connect
Remote ControlSummer/Winter
Reverse
Function

Blade Pitch

Hangsure
CanopyCoastal
Rated

Tricolour



ZODIAC DC



Fan Only Titanium Satin



LIGHT KITS

Light Kit Only
Titanium SatinLight Kit Only
White Satin

EASY CHANGE

2, 3 or 4
Interchangeable
Blade System

FEATURES

- Brushless quiet DC motor
- Energy efficient
- 6 speed DC remote control included
- Up to 8 hour timer function
- Reversible summer or winter mode
- Electronically balanced blades
- Moulded ABS blades
- 19° blade pitch
- Interchangeable 2 blade, 3 blade or 4 blade option
- Indoor or enclosed alfresco installation
- Light model 18W Tricolour variable dim 3000K – 4000K – 5000K





Zodiac 1320mm 52"

17,700m³/hr
 Maximum Airflow


| SPECIFICATIONS | FAN ONLY |
|-----------------------|---------------|
| BLADE DIAMETER | 1320mm 52" |
| HEIGHT | 320mm |
| HEIGHT WITH LED LIGHT | 340mm |
| LUMEN OUTPUT | 1780lm |
| MODEL | ORDERING CODE |
| TITANIUM SATIN | MZF134TSR |
| WHITE SATIN | MZF134WSR |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|-------------------------------|---------------|
| 900mm Downrod White Satin | DRZ36WS |
| 900mm Downrod Titanium Satin | DRZ36TS |
| 1800mm Downrod White Satin | DRZ72WS |
| 1800mm Downrod Titanium Satin | DRZ72TS |
| Light Kit Only Titanium Satin | MZF18TS |
| Light Kit Only White Satin | MZF18WS |

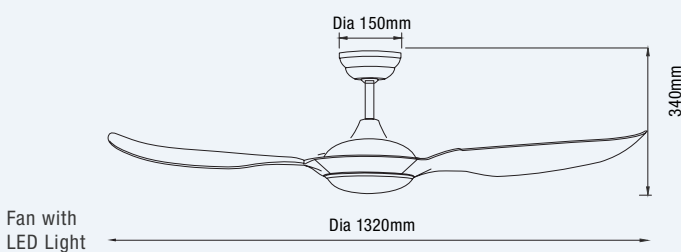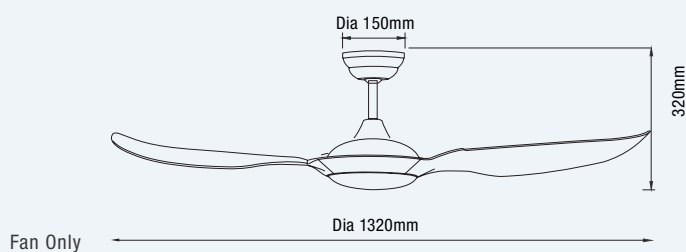



Warranty

Energy
Efficient

DC Motor

DC / 8hr Timer
Quick Connect
Remote ControlSummer/Winter
Reverse
Function

Blade Pitch

Hangsure
CanopyCoastal
Rated

Tricolour

3 Step Switch
Dimming

SCORPION DC



Fan Only Brushed Nickel



Fan Only Matt Black



Fan with LED Light Brushed Nickel



Fan with LED Light White Satin



Fan with LED Light Matt Black



FEATURES

- Brushless quiet DC motor
- Energy efficient
- 5 speed DC remote control included
- Up to 8 hour timer function
- Reversible summer or winter mode
- Electronically balanced blades
- Moulded ABS blades
- 13° blade pitch
- Indoor or enclosed alfresco installation
- Suitable for coastal conditions tropical rated
- 20W Tricolour step dimmable
3000K – 4000K – 5000K





Scorpion 1320mm 52"

13,286m³/hr
 Maximum Airflow


| SPECIFICATIONS | FAN ONLY | FAN WITH LED LIGHT |
|----------------|---------------|--------------------|
| BLADE DIAMETER | 1320mm 52" | 1320mm 52" |
| HEIGHT | 310mm | 390mm |
| LUMEN OUTPUT | - | 1850lm |
| MODEL | ORDERING CODE | |
| WHITE SATIN | MSF133WR | MSF1333WR |
| BRUSHED NICKEL | MSF133BR | MSF1333BR |
| MATT BLACK | MSF133MR | MSF1333MR |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|-------------------------------|---------------|
| 900mm Downrod White Satin | MDRD36WS |
| 900mm Downrod Brushed Nickel | MDRD36N |
| 900mm Downrod Matt Black | MDRD36M |
| 1800mm Downrod White Satin | MDRD72WS |
| 1800mm Downrod Brushed Nickel | MDRD72N |
| 1800mm Downrod Matt Black | MDRD72M |

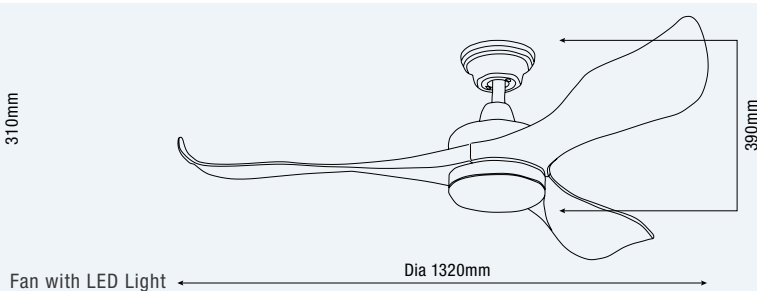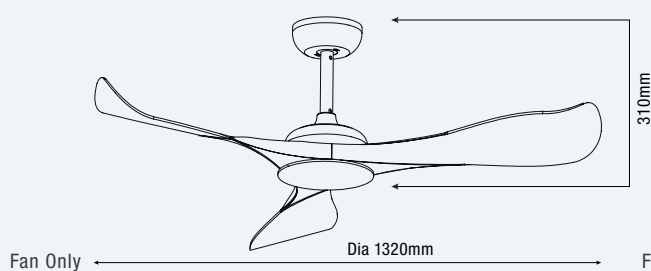



Warranty



Energy Efficient

32W

DC Motor

DC / 8hr Timer
Quick Connect
Remote ControlSummer/Winter
Reverse
Function

20°

Blade Pitch

Hangsure
CanopyNON
RUSTABS
BladesIndoor Cover
Outdoor UseTropical
Rated

Tricolour

3 Step Switch
Dimming

MALIBU DC



Fan Only White



Fan Only Matt Black



Fan Only Walnut



Fan with LED Light White



Fan with LED Light Matt Black



Fan with LED Light Walnut



Fan with LED Light Matt Black/Bamboo

FEATURES


- Brushless quiet DC motor
- 5 Speed remote control included
- Up to 8 hour timer function
- 20° blade pitch
- Suitable for coastal conditions tropical rated
- Indoor or enclosed alfresco installation
- Reversible summer or winter mode
- 15W Tricolour step dimmable 3000K – 4000K – 5000K




Malibu 1320mm 52"

10,200m³/hr
 Maximum Airflow



| SPECIFICATIONS | FAN ONLY | FAN WITH LED LIGHT |
|-------------------|---------------|--------------------|
| BLADE DIAMETER | 1320mm 52" | 1320mm 52" |
| HEIGHT | 272mm | 307mm |
| LUMEN OUTPUT | - | 1650lm |
| MODEL | ORDERING CODE | |
| WHITE | MMF133WWR | MMF1333WWR |
| MATT BLACK | MMF133MMR | MMF1333MMR |
| WALNUT | MMF133OWR | MMF1333OWR |
| MATT BLACK/BAMBOO | MMF133MBR | MMF1333MBR |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|-------------------------------------|---------------|
| 900mm Downrod White Satin 25mm dia | MDRD36WST |
| 900mm Downrod Old Bronze 25mm dia | MDRD36OT |
| 900mm Downrod Matt Black 25mm dia | MDRD36MT |
| 1800mm Downrod White Satin 25mm dia | MDRD72WST |
| 1800mm Downrod Old Bronze 25mm dia | MDRD72OT |
| 1800mm Downrod Matt Black 25mm dia | MDRD72MT |

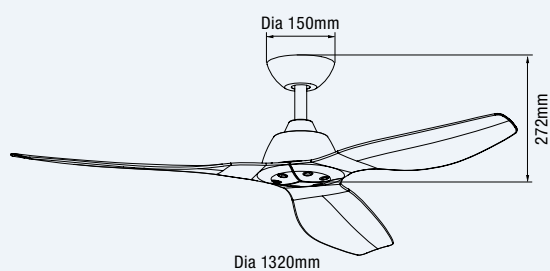

Fan Only

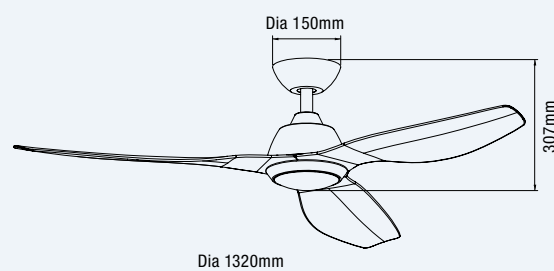

Fan with LED Light



Warranty



Energy Efficient



DC Motor

DC / 8hr Timer
Quick Connect
Remote ControlSummer/Winter
Reverse
Function

Blade Pitch

Hangsure
CanopyCoastal
Rated

Tricolour

3 Step Switch
Dimming

ALBATROSS DC



Fan Only Brushed Nickel



Fan Only White



Fan with LED Light Matt Black



Fan with LED Light Brushed Nickel



Fan with LED Light White



FEATURES

- Brushless quiet DC motor
- 5 Speed remote control included
- Up to 8 hour timer function
- 15° blade pitch
- Suitable for coastal conditions tropical rated
- Indoor or enclosed alfresco installation
- Reversible summer or winter mode
- 18W Tricolour step dimmable 3000K – 4000K – 5000K



Albatross 1800mm 72"

Albatross 2100mm 84"

15,600m³/hr
Maximum Airflow



16,800m³/hr
Maximum Airflow





| SPECIFICATIONS | FAN ONLY | FAN WITH LED LIGHT | | |
|----------------|------------|----------------------|-----------------------------|------------|
| BLADE DIAMETER | 1800mm 72" | 1800mm 72" | 1800mm 72" | 2100mm 84" |
| HEIGHT | 335mm | 385mm | - | - |
| LUMEN OUTPUT | - | 2000lm | - | - |
| ORDERING CODE | | | | |
| MODEL | MOTOR ONLY | MOTOR with LED LIGHT | BLADE SET (1800MM & 2100MM) | |
| WHITE | MAFMWR | MAFML3WR | MAF180W | MAF210W |
| BRUSHED NICKEL | MAFMBR | MAFML3BR | MAF180B | MAF210B |
| MATT BLACK | MAFMMR | MAFML3MR | MAF180M | MAF210M |

NB: Please order your required size blade pack (sold separately) when ordering motor pack.



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|-------------------------------|---------------|
| 900mm Downrod White | MDRD36W |
| 900mm Downrod Brushed Nickel | MDRD36N |
| 900mm Downrod Matt Black | MDRD36M |
| 1800mm Downrod White | MDRD72W |
| 1800mm Downrod Brushed Nickel | MDRD72N |
| 1800mm Downrod Matt Black | MDRD72M |

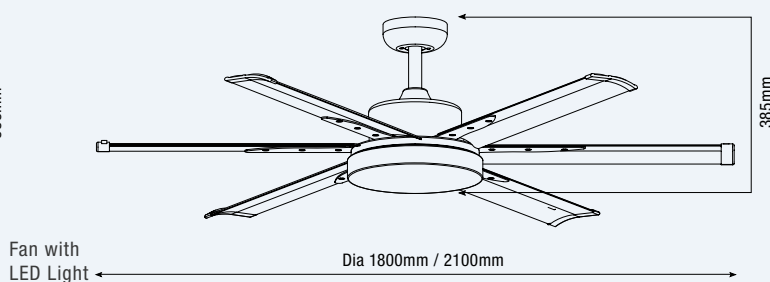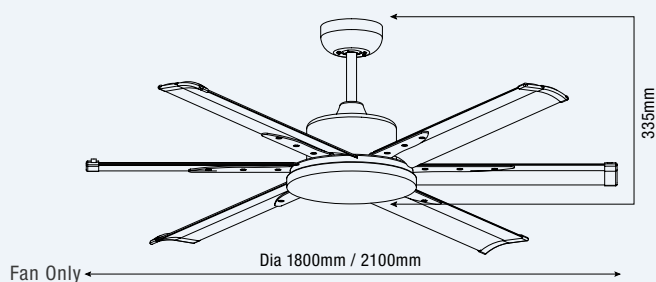



Warranty

Energy
Efficient

DC Motor

DC / 8hr Timer
Quick Connect
Remote ControlSummer/Winter
Reverse
Function

Blade Pitch

Coastal
Rated

ALBATROSS MINI DC



Fan Only Brushed Nickel



Fan Only White



FEATURES

- Brushless quiet DC motor
- Energy efficient
- 5 speed DC remote control included
- Up to 8 hour timer function
- Reversible summer or winter mode
- Aluminium light weight blades
- 8 blade set included
- 17° blade pitch
- Indoor or enclosed alfresco installation



Albatross Mini 1650mm 65"

14,400m³/hr
Maximum Airflow




| SPECIFICATIONS | FAN ONLY |
|----------------|---------------|
| BLADE DIAMETER | 1650mm 65" |
| HEIGHT | 313mm |
| MODEL | ORDERING CODE |
| WHITE | MAF168WR |
| BRUSHED NICKEL | MAF168BR |
| MATT BLACK | MAF168MR |

NB: No LED light available with this model



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|-------------------------------|---------------|
| 900mm Downrod White | MDRD36W |
| 900mm Downrod Brushed Nickel | MDRD36N |
| 900mm Downrod Matt Black | MDRD36M |
| 1800mm Downrod White | MDRD72W |
| 1800mm Downrod Brushed Nickel | MDRD72N |
| 1800mm Downrod Matt Black | MDRD72M |

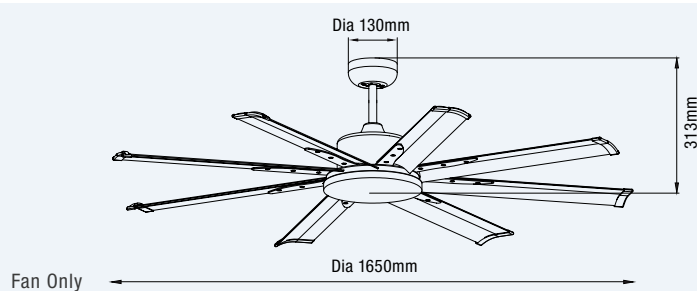



Warranty

Energy
Efficient

32W

DC Motor

DC / 8hr Timer
Quick Connect
Remote ControlSummer/Winter
Reverse
Function

11°

Blade Pitch

Hangsure
CanopyQuiet
OperationIndoor
Use Only

Tricolour

3 Step Switch
Dimming

LINK DC



Fan Only Matt Black



Fan with LED Light Matt Black



Fan with LED Light White



FEATURES

- Energy efficient brushless 30W DC motor
- 11° blade pitch
- Hangsure angle canopy
- 5 speed DC remote and timer with 2, 4, 8 hour timer control mode
- Fully reversible for summer and winter
- PC LED light cover
- Anti rust pressed steel body
- Sealed solid plywood blades
- 10° ceiling rake pitch
- 15W Tricolour step dimmable 3000K – 4000K – 5000K



Link DC 1220mm 48"



9,800m³/hr
Maximum Airflow



| SPECIFICATIONS | FAN ONLY | FAN WITH LED LIGHT |
|----------------|---------------|--------------------|
| BLADE DIAMETER | 1220mm 48" | 1220mm 48" |
| HEIGHT | 307mm | 327mm |
| LUMEN OUTPUT | - | 1650lm |
| MODEL | ORDERING CODE | |
| WHITE | FSLDC124WR | FSLDC1243WR |
| MATT BLACK | FSLDC124MR | FSLDC1243MR |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|---------------------------|---------------|
| 900mm Downrod White | MDRD36W |
| 900mm Downrod Matt Black | MDRD36M |
| 1800mm Downrod White | MDRD72W |
| 1800mm Downrod Matt Black | MDRD72M |

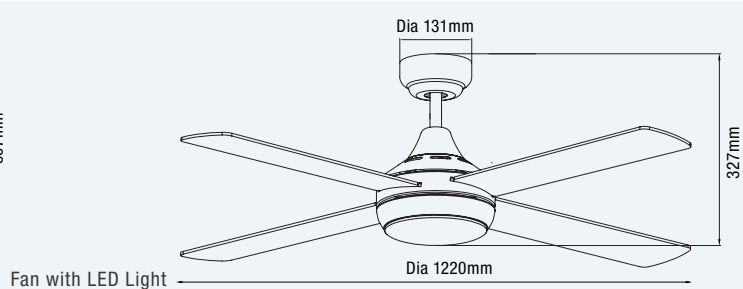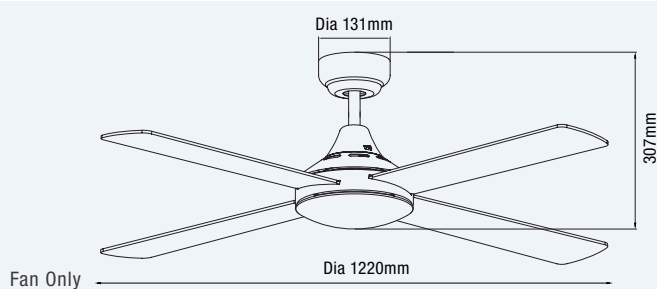



Warranty

Energy
Efficient**28.5W**

DC Motor

DC / 8hr Timer
Quick Connect
Remote ControlSummer/Winter
Reverse
Function**12.5°**

Blade Pitch

Hangsure
Canopy

Tricolour

3 Step Switch
Dimming

LIFESTYLE DC



Fan Only White



Fan with LED Light Brushed Aluminium



Fan with LED Light White



FEATURES

- Brushless quiet DC motor
- Energy efficient
- 5 speed DC remote control included
- Up to 8 hour timer function
- Reversible summer or winter mode
- Electronically balanced blades
- Plywood blades
- 12.5° blade pitch
- Die cast body
- 24W Tricolour step dimmable 3000K – 4000K – 5000K




Lifestyle 1320mm 52"

10,200m³/hr
 Maximum Airflow


| SPECIFICATIONS | FAN ONLY | FAN WITH LED LIGHT |
|-------------------|---------------|--------------------|
| BLADE DIAMETER | 1320mm 52" | 1320mm 52" |
| HEIGHT | 315mm | 345mm |
| LUMEN OUTPUT | - | 2000lm |
| MODEL | ORDERING CODE | |
| WHITE | DLDC134WR | DLDC1343WR |
| BRUSHED ALUMINIUM | DLDC134BR | DLDC1343BR |




| COMPATIBLE ACCESSORIES | ORDERING CODE |
|----------------------------------|---------------|
| 900mm Downrod White | MDRD36W |
| 900mm Downrod Brushed Aluminium | MDRD36B |
| 1800mm Downrod White | MDRD72W |
| 1800mm Downrod Brushed Aluminium | MDRD72B |

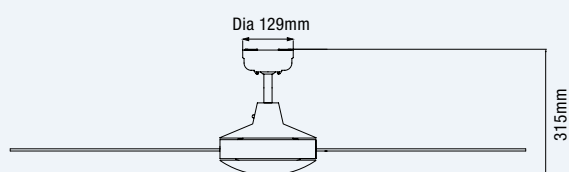

Fan Only

Dia 1320mm

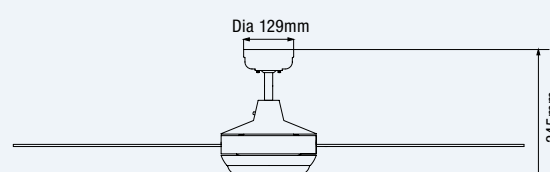

Fan with LED Light

Dia 1320mm





AC CEILING FANS

ADVANTAGES OF AC MOTOR CEILING FANS

Remote Control

AC motors ceiling fans design allows more options for controllers from remote control, wall panel or a simple switch.

Low Cost

AC ceiling fans use less electricity than most household appliances especially air conditioning as a standard AC powered ceiling fan will use less than 100W on the highest speed with the majority of models using less.

More Choices

AC motors ceiling fans have been on the market for a while now. There are plenty of different options and styles for you to choose from that are within your budget.



Warranty



Energy Efficient



AC Motor



Summer/Winter Reverse Function



Blade Pitch



Hangsure Canopy



Indoor Cover Outdoor Use



Tricolour



3 Step Switch Dimming



ELITE AC



Fan Only White



Fan Only Brushed Nickel/Bamboo



Fan Only Matt Black



Fan Only Old Bronze/Merbau Blade



Fan with LED Light White



Fan with LED Light Brushed Nickel/Bamboo Blade



Fan with LED Light Matt Black



Fan with LED Light Matt Black/Bamboo Blade



Fan with LED Light Old Bronze/Merbau Blade

FEATURES

- Powerful & efficient 50W AC motor
- Energy efficient
- Reversible summer or winter mode
- Moulded ABS blades
- 11.5° blade pitch
- Remote control adaptable (sold separately)
- 20W Tricolour step dimmable 3000K – 4000K – 5000K



Elite 1220mm 48"

9,900m³/hr
Maximum Airflow





AC FANS

| SPECIFICATIONS | FAN ONLY | FAN WITH LED LIGHT |
|-----------------------|---------------|--------------------|
| BLADE DIAMETER | 1220mm 48" | 1220mm 48" |
| HEIGHT | 350mm | 400mm |
| LUMEN OUTPUT | - | 1850lm |
| MODEL | ORDERING CODE | |
| WHITE | MEF133WW | MEF1333WW |
| BRUSHED NICKEL/BAMBOO | MEF133BB | MEF1333BB |
| MATT BLACK | MEF133MM | MEF1333MM |
| MATT BLACK/BAMBOO | MEF133MB | MEF1333MB |
| OLD BRONZE/MERBAU | MEF133OM | MEF1333OM |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|---------------------------------|---------------|
| Premier Remote Control Kit | MPREMS |
| Prince Smart Remote Control Kit | MPAPP |
| Premium Remote Control Kit | MPLCDS |
| 900mm Downrod White Satin | MDRA36WS |
| 900mm Downrod Brushed Nickel | MDRA36N |
| 900mm Downrod Matt Black | MDRA36M |
| 900mm Downrod Old Bronze | MDRA36O |
| 1800mm Downrod White Satin | MDRA72WS |
| 1800mm Downrod Brushed Nickel | MDRA72N |
| 1800mm Downrod Matt Black | MDRA72M |
| 1800mm Downrod Old Bronze | MDRA72O |

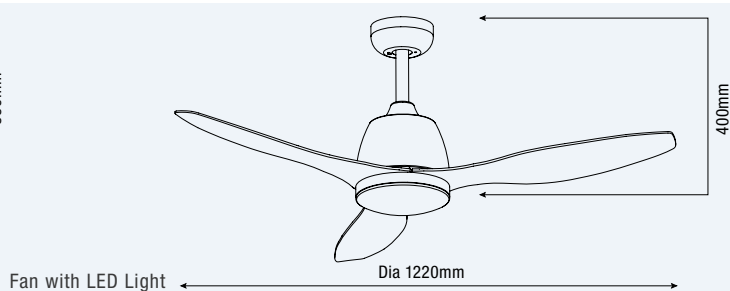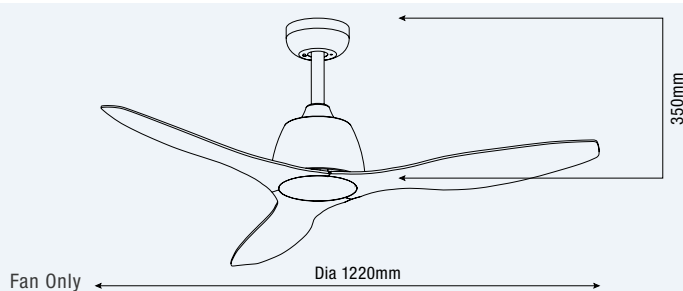



Warranty

Energy
Efficient

AC Motor

Summer/Winter
Reverse
Function

Blade Pitch

Hangsure
CanopyIndoor Cover
Outdoor UseCoastal
Rated

Tricolour

3 Step Switch
Dimming

GOVERNOR AC



Fan Only Titanium Satin



Fan Only White Satin

Fan with LED Light
Old Bronze/Teak

Fan with LED Light Titanium Satin



Fan with LED Light White Satin

FEATURES

- Powerful & efficient 70W AC motor
- Energy efficient
- Remote control adaptable (sold separately)
- Reversible summer or winter mode
- Moulded ABS blades
- 13° blade pitch
- Suitable for coastal conditions tropical rated
- Indoor or enclosed alfresco installation
- 15W Tricolour step dimmable 3000K – 4000K – 5000K



Governor 1520mm 60"

13,380m³/hr
Maximum Airflow




AC FANS


| SPECIFICATIONS | FAN ONLY | FAN WITH LED LIGHT |
|-----------------|---------------|--------------------|
| BLADE DIAMETER | 1520mm 60" | 1520mm 60" |
| HEIGHT | 332mm | 347mm |
| LUMEN OUTPUT | - | 1650lm |
| MODEL | ORDERING CODE | |
| WHITE SATIN | MGF153WS | MGF1533WS |
| TITANIUM SATIN | MGF153TS | MGF1533TS |
| OLD BRONZE/TEAK | MGF1530T | MGF15330T |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|---------------------------------|---------------|
| Premier Remote Control Kit | MPREMS |
| Prince Smart Remote Control Kit | MPAPP |
| Premium Remote Control Kit | MPLCDS |
| 900mm Downrod White Satin | MDRA36WS |
| 900mm Downrod Titanium Satin | MDRA36TS |
| 900mm Downrod Old Bronze | MDRA36O |
| 1800mm Downrod White Satin | MDRA72WS |
| 1800mm Downrod Titanium Satin | MDRA72TS |
| 1800mm Downrod Old Bronze | MDRA72O |

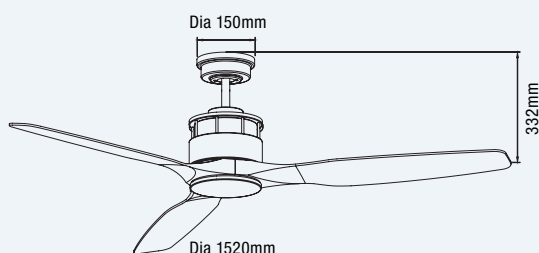

Fan Only

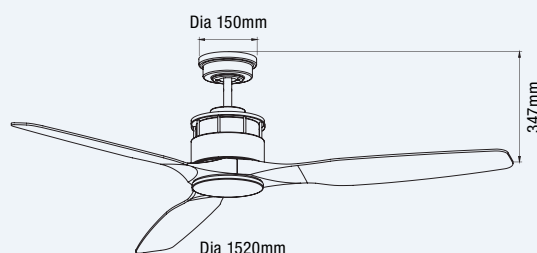

Fan with LED Light



Warranty

Energy
Efficient

AC Motor

Summer/Winter
Reverse
Function

Blade Pitch

Hangsure
CanopyIndoor Cover
Outdoor Use

Tricolour

3 Step Switch
Dimming

TRIUMPH AC



Fan Only Titanium Satin



Fan with LED Light White Satin



Fan with LED Light Titanium Satin

FEATURES

- Powerful & efficient 65W AC motor
- Energy efficient
- Remote control adaptable (sold separately)
- Reversible summer or winter mode
- Moulded ABS blades
- 12° blade pitch
- Suitable for coastal conditions tropical rated
- Indoor or enclosed alfresco installation
- 15W Tricolour step dimmable 3000K – 4000K – 5000K



Triumph 1320mm 52"

10,500m³/hr
Maximum Airflow





AC FANS

| SPECIFICATIONS | FAN ONLY | FAN WITH LED LIGHT |
|----------------|---------------|--------------------|
| BLADE DIAMETER | 1320mm 52" | 1320mm 52" |
| HEIGHT | 330mm | 368mm |
| LUMEN OUTPUT | - | 1650lm |
| MODEL | ORDERING CODE | |
| WHITE SATIN | MTF133WS | MTF1333WS |
| TITANIUM SATIN | MTF133TS | MTF1333TS |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|---------------------------------|---------------|
| Premier Remote Control Kit | MPREMS |
| Prince Smart Remote Control Kit | MPAPP |
| Premium Remote Control Kit | MPLCDS |
| 900mm Downrod White Satin | MDRA36WS |
| 900mm Downrod Titanium Satin | MDRA36TS |
| 1800mm Downrod White Satin | MDRA72WS |
| 1800mm Downrod Titanium Satin | MDRA72TS |

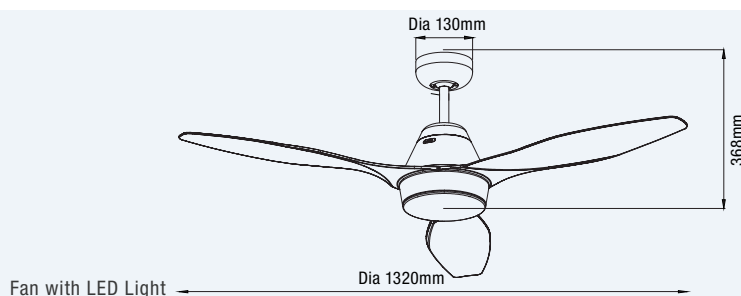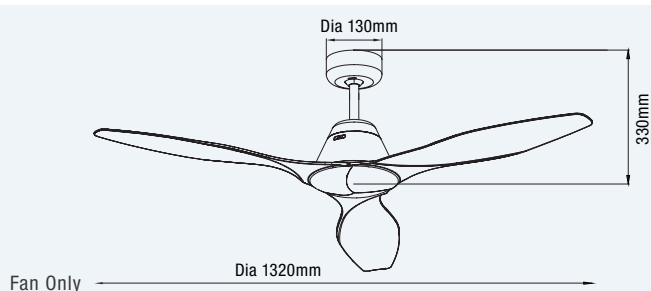



Warranty

Energy
Efficient

AC Motor

Summer/Winter
Reverse
Function

Blade Pitch

Hangsure
CanopyIndoor Cover
Outdoor Use

Tricolour

3 Step Switch
Dimming

FLUSH AC



Fan Only Titanium Satin



Fan with LED Light White Satin



Fan with LED Light Titanium Satin

FEATURES

- Powerful & efficient 60W AC motor
- Energy efficient
- Reversible summer or winter mode
- Moulded ABS blades
- 17° blade pitch
- Remote control adaptable (sold separately)
- 15W Tricolour step dimmable
3000K – 4000K – 5000K



Flush 1270mm 50"

9,900m³/hr
Maximum Airflow




AC FANS

| SPECIFICATIONS | FAN ONLY | FAN WITH LED LIGHT |
|----------------|---------------|--------------------|
| BLADE DIAMETER | 1270mm 50" | 1270mm 50" |
| HEIGHT | 218mm | 253mm |
| LUMEN OUTPUT | - | 1650lm |
| MODEL | ORDERING CODE | |
| WHITE SATIN | MFF133WS | MFF1333WS |
| TITANIUM SATIN | MFF133TS | MFF1333TS |




| COMPATIBLE ACCESSORIES | ORDERING CODE |
|---------------------------------|---------------|
| Premier Remote Control Kit | MPREMS |
| Prince Smart Remote Control Kit | MPAPP |
| Premium Remote Control Kit | MPLCDS |

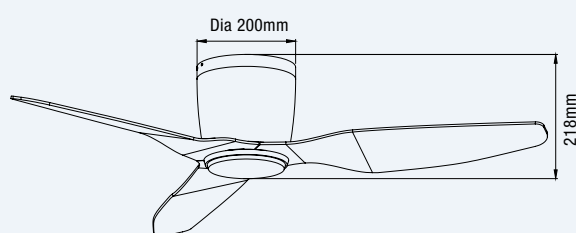

Fan Only

Dia 1270mm

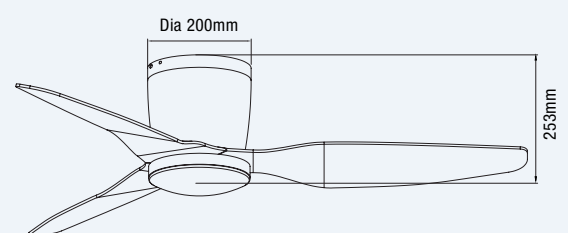

Fan with LED Light

Dia 1270mm



Warranty

Energy
Efficient

AC Motor

Summer/Winter
Reverse
Function

Blade Pitch

Hangsure
Canopy

Rust Free

Indoor Cover
Outdoor Use

Tricolour

3 Step Switch
Dimming

CRUISE AC



Fan Only Matt Black



Fan with LED Light White Satin



Fan with LED Light Matt Black

FEATURES

- 50" model 50W AC motor
- 56" model 65W AC motor
- Energy efficient
- Remote control adaptable (sold separately)
- Reversible summer or winter mode
- Electronically balanced blades
- Moulded ABS blades & body
- 11° blade pitch
- Indoor or enclosed alfresco installation
- Suitable for coastal conditions tropical rated
- 15W Tricolour step dimmable
3000K – 4000K – 5000K



Cruise 1270mm 50"

Cruise 1420mm 56"

10,200m³/hr
Maximum Airflow



11,400m³/hr
Maximum Airflow





AC FANS

| SPECIFICATIONS | FAN ONLY | | FAN WITH LED LIGHT | |
|----------------|---------------|------------|--------------------|------------|
| BLADE DIAMETER | 1270mm 50" | 1420mm 56" | 1270mm 50" | 1420mm 56" |
| HEIGHT | 310mm | | 310mm | |
| LUMEN OUTPUT | - | | 1650lm | |
| MODEL | ORDERING CODE | | | |
| WHITE SATIN | MCF133W | MCF143W | MCF1333W | MCF1433W |
| MATT BLACK | MCF133M | MCF143M | MCF1333M | MCF1433M |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|---------------------------------|---------------|
| Premier Remote Control Kit | MPREMS |
| Prince Smart Remote Control Kit | MPAPP |
| Premium Remote Control Kit | MPLCDS |
| 900mm Downrod White Satin | MDRA36WS |
| 900mm Downrod Matt Black | MDRA36M |
| 1800mm Downrod White Satin | MDRA72WS |
| 1800mm Downrod Matt Black | MDRA72M |

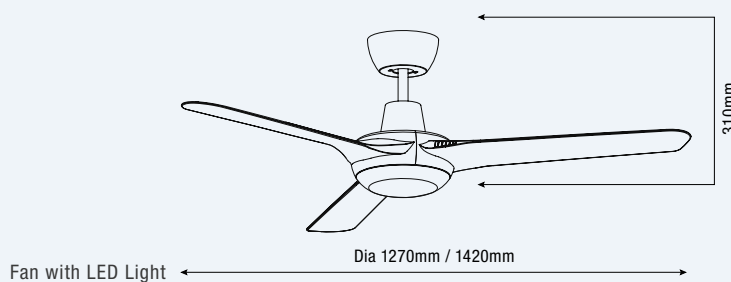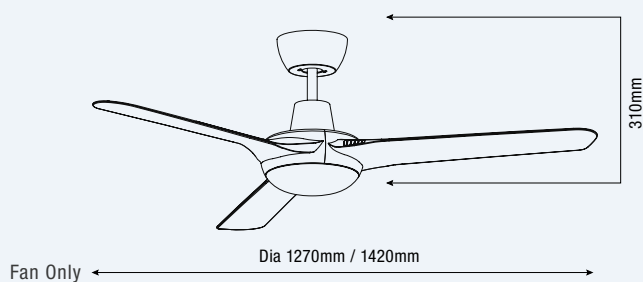



Warranty

Energy
Efficient

AC Motor

Summer/Winter
Reverse
Function

Blade Pitch

Hangsure
Canopy

Rust Free

Indoor Cover
Outdoor Use

Tricolour

3 Step Switch
Dimming

DISCOVERY AC



Fan Only Matt Black



Fan with LED Light White Satin



Fan with LED Light Matt Black

FEATURES

- Powerful & efficient 60W AC motor
- Energy efficient
- Remote control adaptable (sold separately)
- Reversible summer or winter mode
- Electronically balanced blades
- Moulded ABS blades & body
- 12.5° blade pitch
- Indoor or enclosed alfresco installation
- Suitable for coastal conditions tropical rated
- 15W Tricolour step dimmable
3000K – 4000K – 5000K



Discovery 1220mm 48"

Discovery 1320mm 52"

9,900m³/hr
Maximum Airflow



10,200m³/hr
Maximum Airflow





AC FANS

| SPECIFICATIONS | FAN ONLY | | FAN WITH LED LIGHT | |
|----------------|---------------|------------|--------------------|------------|
| BLADE DIAMETER | 1220mm 48" | 1320mm 52" | 1220mm 48" | 1320mm 52" |
| HEIGHT | 282mm | | 346mm | |
| LUMEN OUTPUT | - | | 1650lm | |
| MODEL | ORDERING CODE | | | |
| WHITE SATIN | MDF124W | MDF134W | MDF1243W | MDF1343W |
| MATT BLACK | MDF124M | MDF134M | MDF1243M | MDF1343M |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|---------------------------------|---------------|
| Premier Remote Control Kit | MPREMS |
| Prince Smart Remote Control Kit | MPAPP |
| Premium Remote Control Kit | MPLCDS |
| 900mm Downrod White Satin | MDRA36WS |
| 900mm Downrod Matt Black | MDRA36M |
| 1800mm Downrod White Satin | MDRA72WS |
| 1800mm Downrod Matt Black | MDRA72M |

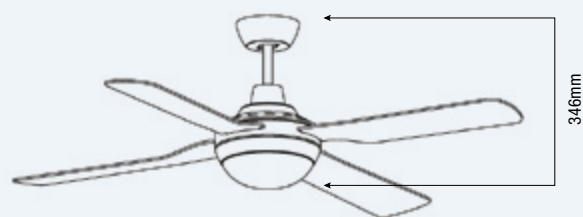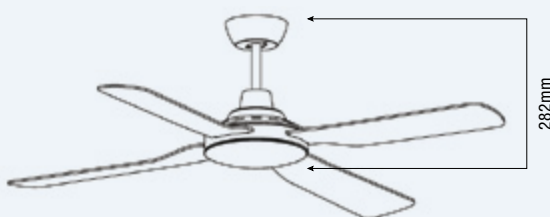

Fan Only

Dia 1220mm / 1320mm

Fan with LED Light

Dia 1220mm / 1320mm



Warranty

Energy
Efficient

AC Motor

Summer/Winter
Reverse
Function

Blade Pitch

Hangsure
CanopyIndoor
Use Only

Tricolour

3 Step Switch
Dimming

RAZOR AC

FEATURES

- Powerful & efficient 69W AC motor
- Energy efficient
- Remote control adaptable (sold separately)
- Reversible summer or winter mode
- Electronically balanced blades
- Plywood blades
- 12.5° blade pitch
- Die cast body
- 28W Tricolour step dimmable 3000K – 4000K – 5000K

Razor 1320mm 52"

9,500m³/hr
Maximum Airflow




AC FANS

| SPECIFICATIONS | FAN WITH LED LIGHT |
|----------------|--------------------|
| BLADE DIAMETER | 1320mm 52" |
| HEIGHT | 300mm |
| LUMEN OUTPUT | 2350lm |
| MODEL | ORDERING CODE |
| WHITE | MRF1343W |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|---------------------------------|---------------|
| Premier Remote Control Kit | MPREMS |
| Prince Smart Remote Control Kit | MPAPP |
| Premium Remote Control Kit | MPLCDS |
| 900mm Downrod White | MDRA36W |
| 1800mm Downrod White | MDRA72W |

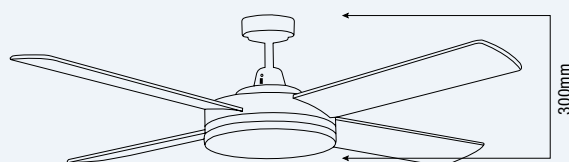

Fan with LED Light



Warranty

Energy
Efficient

AC Motor

Summer/Winter
Reverse
Function

Blade Pitch

Hangsure
Canopy

Rust Free

Indoor Cover
Outdoor UseCoastal
RatedIP
Rating3 Step Switch
Dimming

Tricolour



LIBERTY AC



Fan Only White



Fan Only Matt Black

FEATURES

- IP55 ingress protection
- Powerful & efficient 65W AC motor
- Energy efficient
- Remote control adaptable (sold separately)
- Reversible summer or winter mode
- Electronically balanced blades
- Moulded ABS blades & body
- 12.5° blade pitch
- Indoor or outdoor use
- Suitable for coastal conditions tropical rated
- 15W Tricolour step dimmable
3000K – 4000K – 5000K 1300lm



Liberty 1420mm 56"

11,400m³/hr
Maximum Airflow





AC FANS

| SPECIFICATIONS | FAN IP RATED | FAN ONLY | FAN WITH LED LIGHT |
|----------------|---------------|------------|--------------------|
| BLADE DIAMETER | 1420mm 56" | 1420mm 56" | 1420mm 56" |
| HEIGHT | 282mm | 282mm | 383mm |
| LUMEN OUTPUT | - | - | 1650lm |
| MODEL | ORDERING CODE | | |
| WHITE | MLF144WIP | MLF144W | MLF1443W |
| MATT BLACK | MLF144MIP | - | - |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|---------------------------------|---------------|
| Premier Remote Control Kit | MPREMS |
| Prince Smart Remote Control Kit | MPAPP |
| Premium Remote Control Kit | MPLCDS |
| 900mm Downrod White Satin | MDRA36WS |
| 900mm Downrod Matt Black | MDRA36M |
| 1800mm Downrod White Satin | MDRA72WS |
| 1800mm Downrod Matt Black | MDRA72M |

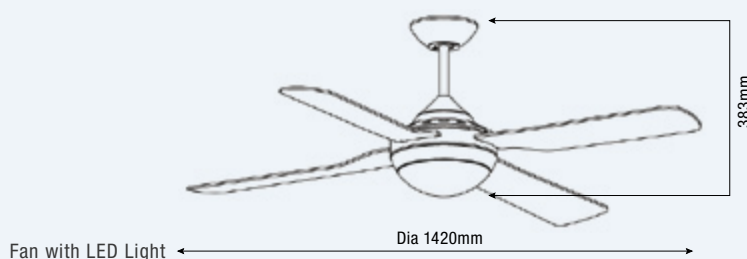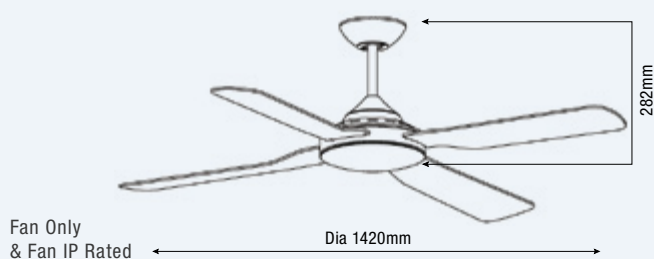



Warranty



Energy Efficient



AC Motor

Summer/Winter
Reverse
Function

Blade Pitch

Hangsure
CanopyIndoor
Use Only

Tricolour

3 Step Switch
Dimming

E27



LIFESTYLE AC



Fan Only White



Fan Only Brushed Aluminium



Fan Only Matt Black



Fan with LED Light Brushed Aluminium



Fan with LED Light Matt Black



Fan with E27* White



Fan with E27* Brushed Aluminium



Fan with E27* Matt Black

FEATURES

- Powerful & efficient 60W AC motor
- Energy efficient
- Remote control adaptable (sold separately)
- Reversible summer or winter mode
- Electronically balanced blades
- Plywood blades
- 12.5° blade pitch
- Die cast aluminium body
- 24W Tricolour step dimmable 3000K – 4000K – 5000K
- *Supplied with 2 x E27 lamp holders (globes not included)




9,600m³/hr
Maximum Airflow





| SPECIFICATIONS | FAN ONLY | FAN WITH LED LIGHT | FAN WITH E27* |
|-------------------|---------------|--------------------|---------------|
| BLADE DIAMETER | 1320mm 52" | 1320mm 52" | 1320mm 52" |
| HEIGHT | 315mm | 345mm | 365mm |
| LUMEN OUTPUT | - | 2000lm | - |
| MODEL | ORDERING CODE | | |
| WHITE | DLS134W | DLS1343W | DLS1344W |
| BRUSHED ALUMINIUM | DLS134B | DLS1343B | DLS1344B |
| MATT BLACK | DLS134M | DLS1343M | DLS1344M |

* Includes 2x E27 lamp holders, globe not included.



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|----------------------------------|---------------|
| Premier Remote Control Kit | MPREMS |
| Prince Smart Remote Control Kit | MPAPP |
| Premium Remote Control Kit | MPLCDS |
| 900mm Downrod White | MDRA36W |
| 900mm Downrod Brushed Aluminium | MDRA36B |
| 900mm Downrod Matt Black | MDRA36M |
| 1800mm Downrod White | MDRA72W |
| 1800mm Downrod Brushed Aluminium | MDRA72B |
| 1800mm Downrod Matt Black | MDRA72M |

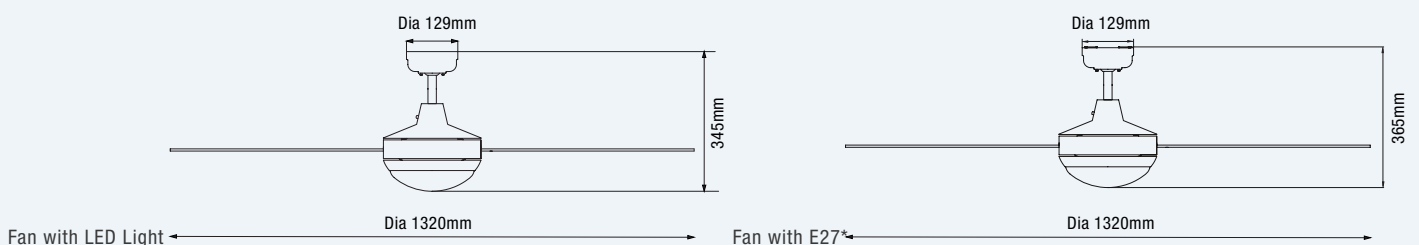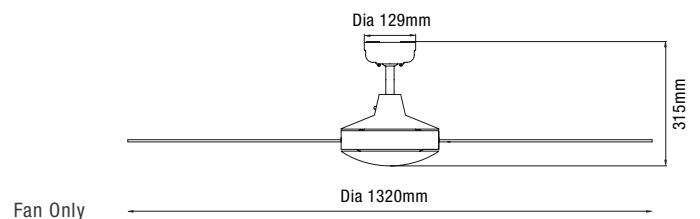



Warranty

Energy
Efficient

AC Motor

Summer/Winter
Reverse
Function

Blade Pitch

Hangsure
CanopyIndoor
Use Only

Tricolour

3 Step Switch
Dimming

E27



LIFESTYLE MINI AC



Fan with LED Light White



Fan with E27* White

FEATURES

- Powerful & efficient 60W AC motor
- Energy efficient
- Remote control adaptable (sold separately)
- Reversible summer or winter mode
- Electronically balanced blades
- Plywood blades
- 12.5° blade pitch
- Die cast aluminium body
- 24W Tricolour step dimmable 3000K – 4000K – 5000K
- *Supplied with 2 x E27 lamp holders (globes not included)




8,100m³/hr
Maximum Airflow






| SPECIFICATIONS | FAN ONLY | FAN WITH LED LIGHT | FAN WITH E27* |
|----------------|---------------|--------------------|---------------|
| BLADE DIAMETER | 1067mm 42" | 1067mm 42" | 1067mm 42" |
| HEIGHT | 315mm | 345mm | 365mm |
| LUMEN OUTPUT | - | 2000lm | - |
| MODEL | ORDERING CODE | | |
| WHITE | DLS104W | DLS1043W | DLS1044W |

* Includes 2x E27 lamp holders, globe not included.



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|---------------------------------|---------------|
| Premier Remote Control Kit | MPREMS |
| Prince Smart Remote Control Kit | MPAPP |
| Premium Remote Control Kit | MPLCDS |
| 900mm Downrod White | MDRA36W |
| 1800mm Downrod White | MDRA72W |

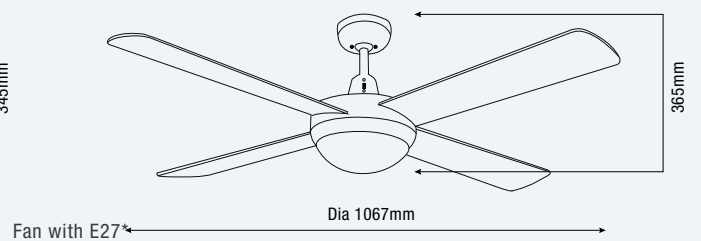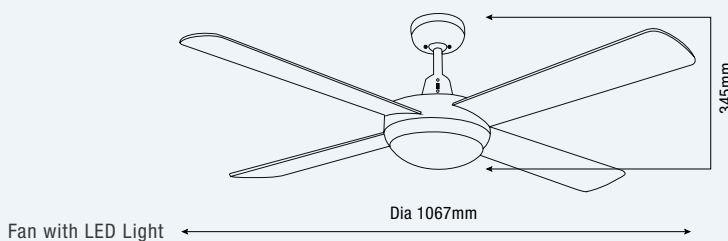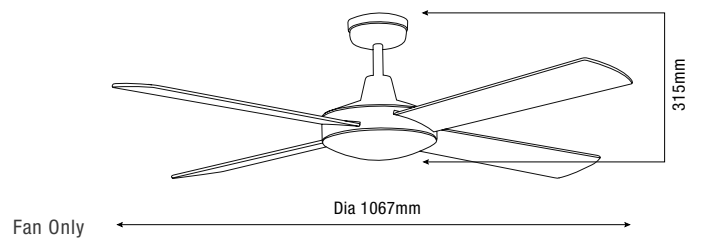



Warranty

Energy
Efficient

AC Motor

Summer/Winter
Reverse
Function

Blade Pitch

Hangsure
CanopyQuiet
OperationIndoor
Use Only

Tricolour

3 Step Switch
Dimming

E27



LINK AC



Fan Only White



Fan with LED Light Black



Fan with LED Light White



Fan with E27* Black



Fan with E27* White

FEATURES

- Powerful and efficient 55W AC motor
- 11° blade pitch
- Hangsure angle canopy
- 3 speed wall controller & light switch
- Fully reversible for summer and winter
- Remote control adaptable with Martec Remotes : MPREMS, MPLCDS, MPAPP (sold separately)
- Anti rust pressed steel body
- Sealed solid plywood blades
- 10° ceiling rake pitch
- 15W tricolour step dimmable 3000K - 4000K - 5000K
- *Supplied with 2x E27 lamp holders (globes not included)



7,600m³/hr
Maximum Airflow






| SPECIFICATIONS | FAN ONLY | FAN WITH LED LIGHT | FAN WITH E27* |
|------------------|---------------|--------------------|---------------|
| BLADE DIAMETER | 1220mm 48" | 1220mm 48" | 1220mm 48" |
| HEIGHT | 307mm | 327mm | 367mm |
| LUMEN OUTPUT | - | 1650lm | - |
| MODEL | ORDERING CODE | | |
| WHITE | FSL124M | FSL1243W | FSL1244W |
| BLACK | FSL124W | FSL1243M | FSL1244M |
| WHITE + REMOTE** | | FSL1243WR | FSL1244WR |

* Includes 2x E27 lamp holders, globe not included.

**Remote included



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|---------------------------------|---------------|
| Premier Remote Control Kit | MPREMS |
| Prince Smart Remote Control Kit | MPAPP |
| Premium Remote Control Kit | MPLCDS |
| 900mm Downrod White | MDRA36W |
| 900mm Downrod Matt Black | MDRA36M |
| 1800mm Downrod White | MDRA72W |
| 1800mm Downrod Matt Black | MDRA72M |

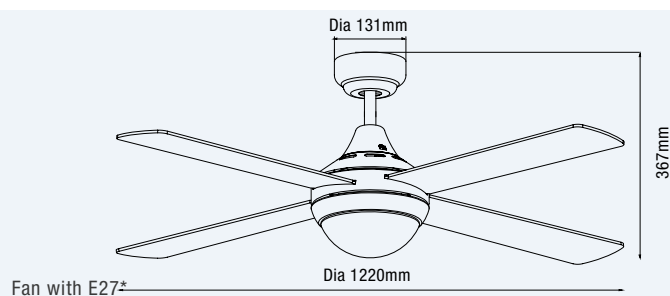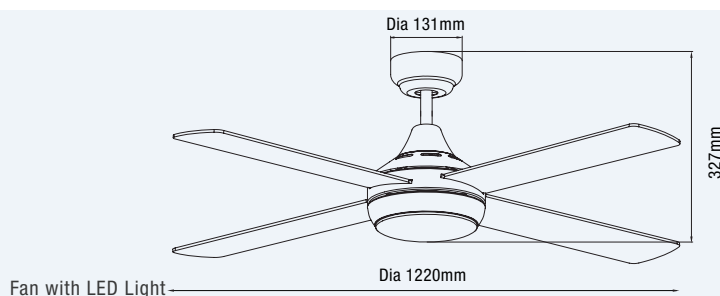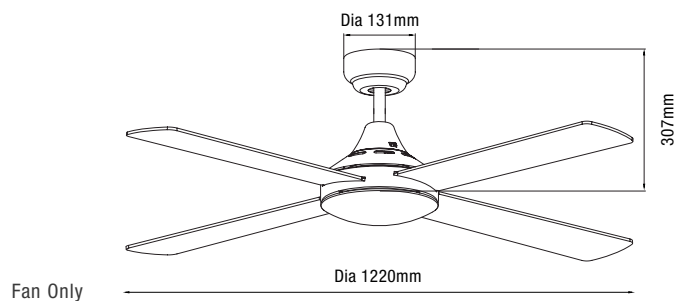



Warranty

Energy
Efficient

AC Motor

Summer/Winter
Reverse
Function

Blade Pitch

Hangsure
Canopy

Rust Free

Indoor Cover
Outdoor Use

OASIS AC | HAMILTON AC



Fan Only Oasis



Fan Only Hamilton



Fan with Light Hamilton

FEATURES

- Powerful & efficient 63W AC motor
- Energy efficient
- Reversible summer or winter mode
- Polycarbonate blades
- 12.5° blade pitch
- Remote control adaptable (sold separately)
- Light kit adaptable (sold separately)
- Indoor or enclosed alfresco installation



Oasis 1320mm 52"

Hamilton 1320mm 52"

9,900m³/hr
Maximum Airflow



8,400m³/hr
Maximum Airflow





AC FANS

| SPECIFICATIONS | OASIS | HAMILTON |
|-------------------|---------------|------------|
| BLADE DIAMETER | 1320mm 52" | 1320mm 52" |
| HEIGHT | 360mm | 430mm |
| HEIGHT WITH LIGHT | 470mm | 600mm |
| MODEL | ORDERING CODE | |
| FAN ONLY | MOF1340B | MHF1340B |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|---------------------------|---------------|
| Light Kit Oasis | MOLKOB |
| Light Kit Hamilton | MHLKOB |
| 900mm Downrod Old Bronze | MDRA360 |
| 1800mm Downrod Old Bronze | MDRA720 |

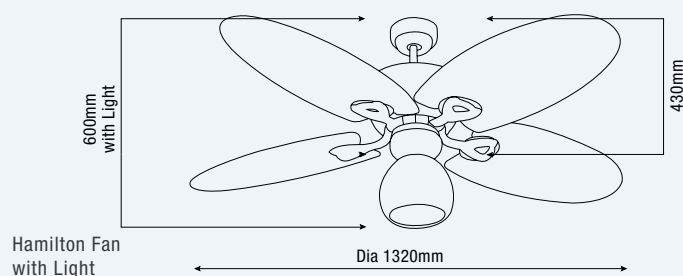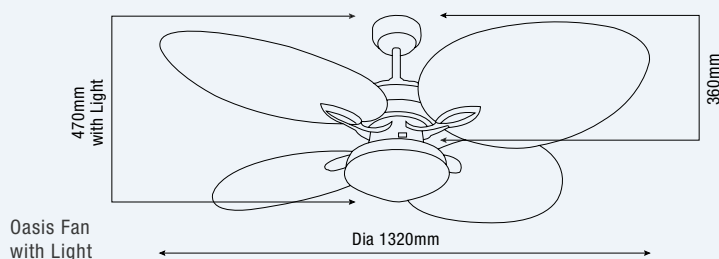



Warranty

Energy
Efficient

AC Motor

Summer/Winter
Reverse
Function

Blade Pitch

Hangsure
CanopyIndoor Cover
Outdoor UseCoastal
RatedTropical
Rated

PRECISION AC



Fan Only Stainless Steel



Fan Only Brushed Nickel



Light Kit White

Light Kit
Brushed NickelLight Kit
316 Stainless Steel

FEATURES

- Powerful & efficient 75W AC motor
- 56" models powerful 120W AC motor
- Energy efficient
- Remote control adaptable (sold separately)
- Reversible summer or winter mode
- 23° blade pitch
- 304 Stainless steel blades (304 model only)
- 316 marine grade stainless steel blades (316 model only)
- Fast fix blades
- Light kit adaptable (sold separately)
- Remote control adaptable with Martec Remotes: MPREMS, MPLCDS, MPAPP (sold separately)

While the MPREM remote is compatible with all Martec AC ceiling fans, please note that for the precision fan range, the quick connect plugs will need to be cut off and hard wired.



Precision 1220mm 48"

Precision 1320mm 52"

Precision 1420mm 56"

16,380m³/hr
Maximum Airflow



18,960m³/hr
Maximum Airflow



21,000m³/hr
Maximum Airflow





AC FANS

| SPECIFICATIONS | | FAN ONLY | |
|---------------------|------------|---------------|------------|
| BLADE DIAMETER | 1220mm 48" | 1320mm 52" | 1420mm 56" |
| HEIGHT | 300mm | 300mm | 300mm |
| HEIGHT WITH LIGHT | 390mm | 390mm | 390mm |
| MODEL | | ORDERING CODE | |
| WHITE | MPF120WH | MPF130WH | MPF140WH |
| 304 BRUSHED NICKEL | MPF3042SS | MPF3043SS | MPF3044SS |
| 316 STAINLESS STEEL | MPF3162SS | MPF3163SS | MPF3164SS |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|------------------------------------|---------------|
| Premier Remote Control Kit | MPREMS |
| Prince Smart Remote Control Kit | MPAPP |
| Premium Remote Control Kit | MPLCDS |
| Light Kit White | PLKWH |
| Light Kit Brushed Nickel | PLKBN |
| Light Kit - 316 Stainless Steel | PLKSS |
| 900mm Downrod White | DREPO36W |
| 900mm Downrod Brushed Nickel | DREPO36BN |
| 900mm Downrod 316 Stainless Steel | DRP36SS |
| 1800mm Downrod White | DREPO72W |
| 1800mm Downrod Brushed Nickel | DREPO72BN |
| 1800mm Downrod 316 Stainless Steel | DRP72SS |

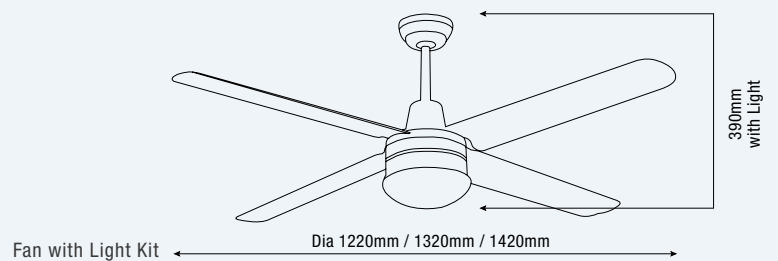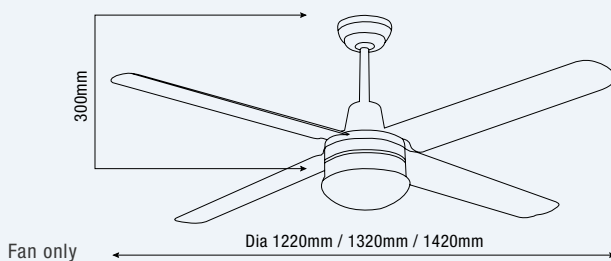



Warranty

Energy
Efficient

AC Motor

Summer/Winter
Reverse
Function

Blade Pitch

Hangsure
CanopyIndoor
Use Only

ALPHA AC



*Remote included
CFW124CR
model only



Fan Only Brushed Nickel



Fan Only Antique Brass



Fan Only White

FEATURES

- Powerful & efficient 60W AC motor
- Energy efficient
- Reversible summer or winter mode
- Plywood blades
- 12° blade pitch
- Light model includes 1 x E27 lamp holder (globe not included)



Alpha 1220mm 48"



8,520m³/hr
 Maximum Airflow


AC FANS

| SPECIFICATIONS | FAN ONLY | FAN WITH LIGHT | FAN WITH LIGHT + REMOTE |
|-------------------------|---------------|----------------|-------------------------|
| BLADE DIAMETER | 1220mm 48" | 1220mm 48" | 1220mm 48" |
| HEIGHT | 335mm | 420mm | 420mm |
| MODEL | ORDERING CODE | | |
| FAN ONLY WHITE | CFW124 | CFW124C | CFW124CR* |
| FAN ONLY BRUSHED NICKEL | CFS124 | - | - |
| FAN ONLY ANTIQUE BRASS | CFA124 | - | - |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|--|---------------|
| Premier Remote Control Kit | MPREMS |
| Prince Smart Remote Control Kit | MPAPP |
| Premium Remote Control Kit | MPLCDS |
| Four Seasons Infrared Remote Control Kit | FSIREM |
| Clipper Light Kit White | FSLCW |
| Clipper Light Kit Brushed Nickel | FSLCS |
| Clipper Light Kit Antique Brass | FSLCA |
| 900mm Downrod White | MDRA36W |
| 900mm Downrod Brushed Nickel | MDRA36N |
| 900mm Downrod Antique Brass | MDRA36A |
| 1800mm Downrod White | MDRA72W |
| 1800mm Downrod Brushed Nickel | MDRA72N |
| 1800mm Downrod Antique Brass | MDRA72A |

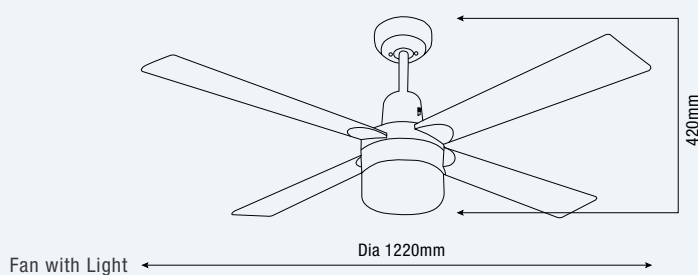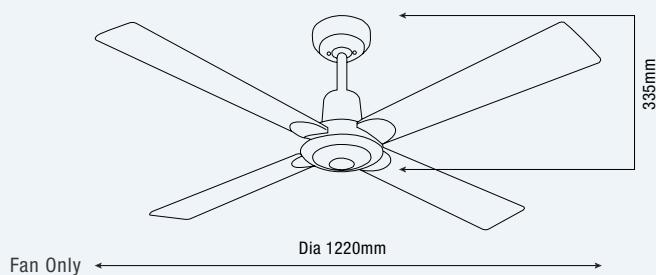



Warranty

Energy
Efficient

AC Motor

Summer/Winter
Reverse
Function

Blade Pitch

Hangsure
CanopyIndoor Cover
Outdoor Use

TRISERA AC



Fan Only White

FEATURES

- Powerful & efficient 60W AC motor
- 56" model 80W AC motor
- Energy efficient
- Reversible summer or winter mode
- 304 stainless steel blades brushed nickel model only
- Aluminium blades on white models
- 17° blade pitch
- Electronically balanced blades
- Remote control adaptable (sold separately)
- Interchangeable 3 blade or 4 blade option



Trisera 1220mm 48"

Trisera 1320mm 52"

Trisera 1420mm 56"

9,900m³/hr
Maximum Airflow



10,800m³/hr
Maximum Airflow



12,600m³/hr
Maximum Airflow




AC FANS

| SPECIFICATIONS | | FAN ONLY | |
|------------------------|---------------|------------|------------|
| BLADE DIAMETER | 1220mm 48" | 1320mm 52" | 1420mm 56" |
| HEIGHT | 335mm | 335mm | 335mm |
| MODEL | ORDERING CODE | | |
| WHITE | FST1234W | FST1334W | FST1434W |
| STAINLESS STEEL BLADES | FST1234S | FST1334S | FST1434S |



| COMPATIBLE ACCESSORIES | ORDERING CODE |
|--|---------------|
| Premier Remote Control Kit | MPREMS |
| Prince Smart Remote Control Kit | MPAPP |
| Premium Remote Control Kit | MPLCDS |
| Four Seasons Infrared Remote Control Kit | FSIREM |
| Clipper Light Kit White | FSLCW |
| Clipper Light Kit Brushed Nickel | FSLCS |
| 900mm Downrod White | MDRA36W |
| 900mm Downrod Brushed Nickel | MDRA36N |
| 1800mm Downrod White | MDRA72W |
| 1800mm Downrod Brushed Nickel | MDRA72N |

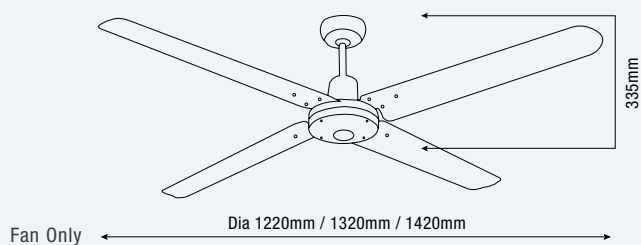





CEILING FANS ACCESSORIES

ADVANTAGES OF ACCESSORIES

Remote Control

Remote control allows you to change the fan speed with a touch of a button via a remote or wall control panel.

Light

Ceiling fan lights gives you brightness while providing a relaxing cool breeze.

Downrod

Extension rod provides convenience and better efficiency when the area has a high ceiling.

1
YEARIn-Home
WarrantyQuick Connect
System

PREMIER REMOTE CONTROL KIT

Stylish and of the highest quality, featuring a 3 speed fan setting, on/off fan and light function and the convenience of a 10 metre RF operational range.

Includes quick connect plug system for easy installation.

* Note: Frequency switches Includes 4 switch settings which delivers 16 different frequency combinations

ORDERING CODE

Premier Remote Control Kit

MPREMS

1
YEARIn-Home
WarrantyQuick Connect
System

PREMIUM LCD REMOTE CONTROL KIT

Stylish and of the highest quality, featuring a 3 speed fan setting, light dimmer, 3 minute light delay, 1-8 hour timer function, on/off fan and light function and the convenience of a 10 metre RF operational range.

ORDERING CODE

Premium Remote Control Kit

MPLCDS

FEATURES

- 1 year in-home warranty
- 3 speed high, medium, low
- Suitable for all step dim AC fans
- Light On/Off function
- 2x AAA 1.5V batteries included

- Includes wall mounting bracket
- Radio frequency
- 4 Dip switches make 16 possible frequency combinations
- 2, 4, 8 hour timer

- 1 year in-home warranty
- 3 speed high, medium, low
- 2, 4, 8 hour timer
- 2x AAA 1.5V batteries included

- Includes wall mounting bracket
- Radio frequency
- 4 dip switches make 16 possible frequency combinations

While this remote is compatible with all Martec AC ceiling fans, please note that for the precision fan range, the quick connect plugs will need to be cut off and hard wired.





1
YEAR
In-Home
Warranty



Quick Connect
System



1
YEAR
In-Home
Warranty



Quick Connect
System



Martec OneTouch
Free Download



FAN
ACCESSORIES



INFRA-RED REMOTE CONTROL KIT

The FourSeasons Infra-red remote control is both stylish and of course of the highest quality, featuring 3 speed fan setting, on/off fan and light function, light delay switch-off functionality, and the convenience of a 10 metre Infra-red operational range.

ORDERING CODE

Four Seasons Infra Red Remote Control Kit FSIREM

PRINCE SMART REMOTE CONTROL KIT

The Martec Prince smart remote control is both stylish and of course the highest quality. The Prince smart remote control features the latest Martec OneTouch app technology. The Martec OneTouch app enables the convenient control of multiple compatible Martec Ceiling Fans with the addition of advanced timer function, speed control, security settings and more.

ORDERING CODE

Prince Smart Remote Control Kit MPAPP

FEATURES

- 1 year in-home warranty
- 3 speed high, medium, low
- Light On/Off function
- 2x AAA 1.5V batteries included
- Includes wall mounting bracket
- Infrared control
- 3 minute light delay function

FEATURES

- 1 year in-home warranty
- 3 speed high, medium, low
- Suitable for step dim AC fans with light
- Advanced timer features
- Light On/Off function
- 2x AAA 1.5V batteries included
- Includes wall mounting bracket
- Bluetooth 4.0 remote control technology
- OneTouch App available from the Apple App Store and Google Play Store

While this remote is compatible with all Martec AC ceiling fans, please note that for the precision fan range, the quick connect plugs will need to be cut off and hard wired.

DOWNLIGHTS



ARTE
Page 68



ULTRA
Page 70



DISCUS
Page 71



PRIME
Page 72



BLITZ II
Page 73



TITAN II
Page 74

SURFACE MOUNTED LIGHTING



ORBIT
Page 76



CONRAD
Page 78



ECLIPSE II
Page 80



BLADE
Page 82

EXTERIOR LIGHTING



DEFENDER
Page 84



FORTRESS II
Page 86



RANGER
Page 88



GUARD
Page 90



PATROL
Page 92



ATLAS
Page 93



COVE
Page 94



SONAR
Page 96

DIMMERS



**ROTARY LED
LIGHT DIMMER**
Page 97



**PUSH BUTTON LED
LIGHT DIMMER**
Page 97

TRADETEC



**EMERGENCY
EXIT**
Page 99



SLIMFIRE
Page 100



**DIFFUSED
BATTEN**
Page 101



**WEATHERPROOF
BATTEN**
Page 102



**EXECUTIVE
PANEL**
Page 103





DOWNLIGHTS

Downlights are a well known and flexible lighting option, they are versatile and easy to fit. The primary purpose of a downlight is to provide functional ambient light and to ensure a room is illuminated well.

Martec® offers a range of downlights with switchable wattage and colour temperature to suit your application needs. Dimming options are available using Martec® dimmers to create mood lighting.

ARTE



DOWNLIGHTS



ARTE WHITE



ARTE GIMBAL WHITE




ARTE MINI WHITE


FEATURES

- Recessed low glare design
- *Ø90mm cut out (Arte & Arte Gimble)
- **Ø70mm cut out (Arte Mini)
- IP44 ingress protection
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature between 3000K – 4000K – 5000K
- Supplied with flex and plug for simple installation
- Dimmable with Martec® dimmers (see p97 for details)

| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|---|-------|-------|-------|--------------|
| ARTE TRICOLOUR LED DOWNLIGHT WHITE | 10W | 850lm | 3000K | TLAD34510WD |
| | | 900lm | 4000K | |
| | | 990lm | 5000K | |
| ARTE GIMBLE TRICOLOUR LED DOWNLIGHT WHITE | 10W | 850lm | 3000K | TLAG34510WD |
| | | 880lm | 4000K | |
| | | 990lm | 5000K | |
| ARTE MINI TRICOLOUR LED DOWNLIGHT WHITE | 8W | 600lm | 3000K | TLAM34510WD |
| | | 670lm | 4000K | |
| | | 700lm | 5000K | |

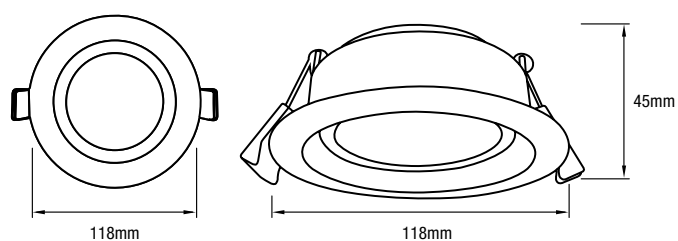

ARTE & ARTE GIMBAL


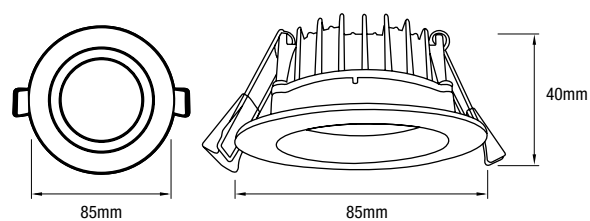


ARTE MINI

ULTRA



| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|--|-------|-------------------------|-------------------------|--------------|
| ULTRA TRICOLOUR LED DOWNLIGHT WHITE | 10W | 900lm 930lm 970lm | 3000K 4000K 5000K | TLUD34510WD |
| ADAPTER PLATE 140MM TO SUIT | - | - | - | TLUP140W |

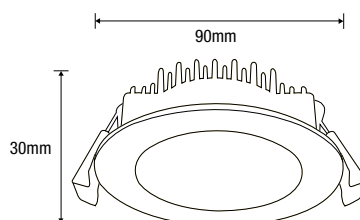

ADAPTOR PLATE

FEATURES



- Recessed low glare design with slim body profile
- Ø90mm cut out
- IP44 ingress protection
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature between 3000K – 4000K – 5000K
- Supplied with flex and plug for simple installation
- Dimmable with Martec® dimmers (see p97 for details)

DISCUS



DOWNLIGHTS

| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|---------------------------------------|-------|--------|-------|--------------|
| DISCUS DUAL POWER LED DOWNLIGHT WHITE | 20W | 2250lm | 3000K | TLDD34523WD |
| | | 2550lm | 4000K | |
| | | 2550lm | 5000K | |
| | 30W | 3000lm | 3000K | |
| | | 3400lm | 4000K | |
| | | 3350lm | 5000K | |

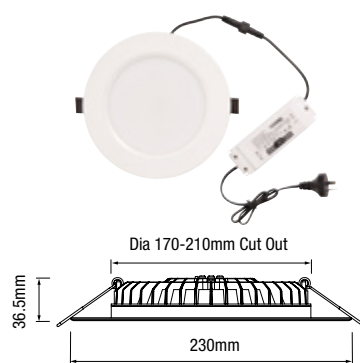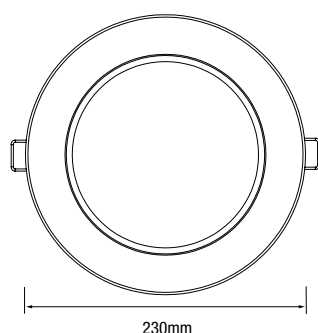

FEATURES

- Recessed low glare design with slim body profile
- Ø170-230mm cut out
- IP44 ingress protection
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature between 3000K – 4000K – 5000K
- Supplied with flex and plug for simple installation
- Dual power switch
- Dimmable with Martec® dimmers (see p97 for details)

PRIME



IP
Rating



IC-Rated



IC-Rated



DIM



Beam Angle



Cutout Size



LED Lifetime



Replacement
Warranty





Tricolour



Energy
Efficient



| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|-------------------------------------|-------|---------------------------|-------------------------|--------------|
| PRIME TRICOLOUR LED DOWNLIGHT WHITE | 10W | 900lm 1000lm 1080lm | 3000K 4000K 5000K | TLPD34510WD |

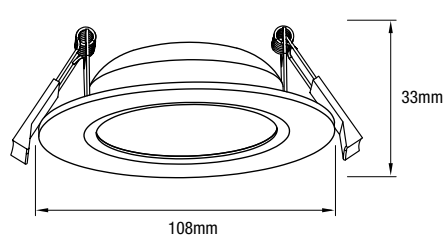

FEATURES

- Recessed low glare design with slim body profile
- Ø90mm cut out
- IP44 ingress protection
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature between 3000K – 4000K – 5000K
- Supplied with flex and plug for simple installation
- Dimmable with Martec® dimmers (see p97 for details)

BLITZ II



IP
Rating



IC-4
Rated



IC-F
Rated



DIM



Beam Angle



Cutout Size



LED Lifetime



Replacement
Warranty





Tricolour



Energy
Efficient



| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|--|-------|-------|-------|--------------|
| BLITZ II TRICOLOUR LED DOWNLIGHT WHITE | 10W | 900lm | 3000K | TLBD34510WD |
| BLITZ II TRICOLOUR LED DOWNLIGHT MATT BLACK | | 930lm | 4000K | TLBD34510MD |
| | | 970lm | 5000K | |
| ADAPTER PLATE 140MM TO SUIT | - | - | - | TLUP140W |

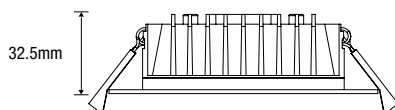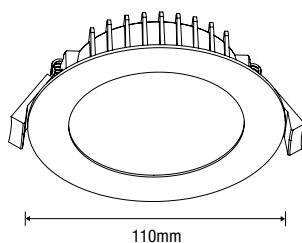

ADAPTOR PLATE



FEATURES

- Recessed low glare design with slim body profile
- Ø90mm cut out
- IP44 ingress protection
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature between 3000K – 4000K – 5000K
- Supplied with flex and plug for simple installation
- Dimmable with Martec® dimmers (see p97 for details)

TITAN II



| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|--|-------|-------|-------|--------------|
| TITAN II TRICOLOUR LED DOWNLIGHT WHITE | 10W | 900lm | 3000K | TLTD34510WD |
| | | 930lm | 4000K | |
| TITAN II TRICOLOUR LED DOWNLIGHT MATT BLACK | | 970lm | 5000K | TLTD34510MD |

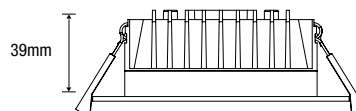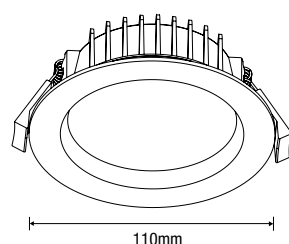

FEATURES

- Recessed low glare design with slim body profile
- Ø90mm cut out
- IP44 ingress protection
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature between 3000K – 4000K – 5000K
- Supplied with flex and plug for simple installation
- Dimmable with Martec® dimmers (see p97 for details)



SURFACE MOUNTED LIGHTING

Surface mounted lighting provides an installation solution where functionality and style are required. They can be installed onto any flat surface and provide quality even light distribution.

All Martec® oyster lights are switchable for colour temperature and come in a range of sizes.

ORBIT



ORBIT 290MM WHITE



ORBIT 330MM WHITE




ORBIT 380MM WHITE

FEATURES


- IP20 ingress protection suitable for residential and indoor application
- Steel base with toughened acrylic diffuser
- Switchable colour temperature between 3000K – 4000K – 5000K
- Provides an uniform light output using SMD LED modular technology
- Centre cable feed




| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|--|-------|--------|-------|--------------|
| ORBIT TRICOLOUR LED OYSTER 290MM WHITE | 12W | 900lm | 3000K | ML0034512 |
| | | 1000lm | 4000K | |
| | | 950lm | 5000K | |
| ORBIT TRICOLOUR LED OYSTER 330MM WHITE | 18W | 1400lm | 3000K | ML0034518 |
| | | 1600lm | 4000K | |
| | | 1500lm | 5000K | |
| ORBIT TRICOLOUR LED OYSTER 380MM WHITE | 24W | 1700lm | 3000K | ML0034524 |
| | | 1900lm | 4000K | |
| | | 1800lm | 5000K | |
| | 28W | 2200lm | 3000K | ML0034528 |
| | | 2400lm | 4000K | |
| | | 2300lm | 5000K | |

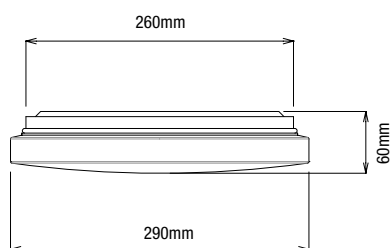

ORBIT 290MM

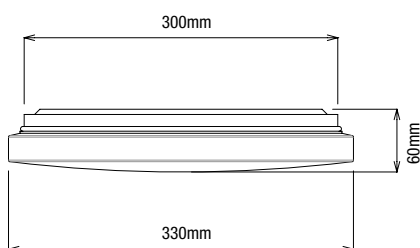

ORBIT 330MM

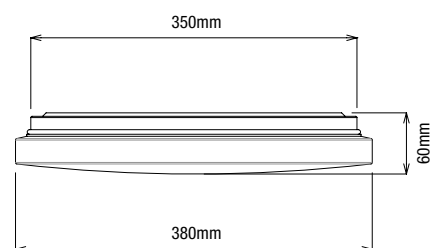

ORBIT 380MM

CONRAD



SURFACE MOUNTED
LIGHTING



CONRAD 200MM WHITE



CONRAD 300MM WHITE



CONRAD 400MM WHITE



CONRAD 200MM
MATT BLACK



CONRAD 300MM
MATT BLACK




CONRAD 400MM
MATT BLACK


FEATURES

- IP54 ingress protection
- Ideal for residential or commercial use
- Switchable colour temperature between 3000K – 4000K – 5000K
- Double insulation
- Provides a uniform light output using SMD LED modular technology
- Dimmable with Martec® dimmers (see p97 for details)


| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|---|-------|--------|-------|--------------|
| CONRAD TRICOLOUR LED OYSTER 200MM MATT BLACK | 15W | 1300lm | 3000K | MLC034515MD |
| | | 1500lm | 4000K | |
| CONRAD TRICOLOUR LED OYSTER 200MM WHITE | | 1400lm | 5000K | MLC034515WD |
| CONRAD TRICOLOUR LED OYSTER 300MM MATT BLACK | 24W | 2100lm | 3000K | MLC034524MD |
| | | 2300lm | 4000K | |
| CONRAD TRICOLOUR LED OYSTER 300MM WHITE | | 2200lm | 5000K | MLC034524WD |
| CONRAD TRICOLOUR LED OYSTER 400MM MATT BLACK | 35W | 3100lm | 3000K | MLC034535MD |
| | | 3300lm | 4000K | |
| CONRAD TRICOLOUR LED OYSTER 400MM WHITE | | 3200lm | 5000K | MLC034535WD |

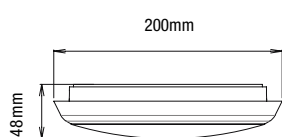

CONRAD 200MM

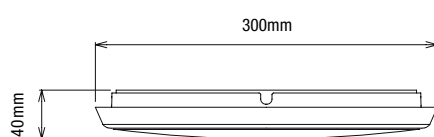

CONRAD 300MM

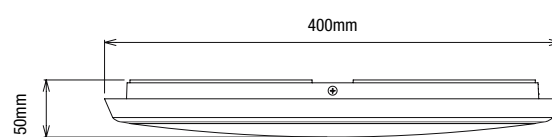

CONRAD 400MM

ECLIPSE II



SURFACE MOUNTED
LIGHTING



ECLIPSE II 220MM



ECLIPSE II 270MM




ECLIPSE II 320MM

FEATURES

- IP54 ingress protection
- Polycarbonate body and opal acrylic diffuser
- Switchable colour temperature between 3000K – 4000K – 5000K
- Ideal for residential or commercial use
- Quick connect system for fast and easy installation
- Dimmable with Martec® dimmers (see p97 for details)

| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|--|-------|--------|-------|--------------|
| ECLIPSE II TRICOLOUR LED OYSTER 220MM WHITE | 15W | 1440lm | 3000K | TLE034515WD |
| | | 1600lm | 4000K | |
| | | 1500lm | 5000K | |
| ECLIPSE II TRICOLOUR LED OYSTER 270MM WHITE | 18W | 1120lm | 3000K | TLE034518WD |
| | | 1350lm | 4000K | |
| | | 1250lm | 5000K | |
| ECLIPSE II TRICOLOUR LED OYSTER 320MM WHITE | 28W | 2100lm | 3000K | TLE034528WD |
| | | 2300lm | 4000K | |
| | | 2150lm | 5000K | |

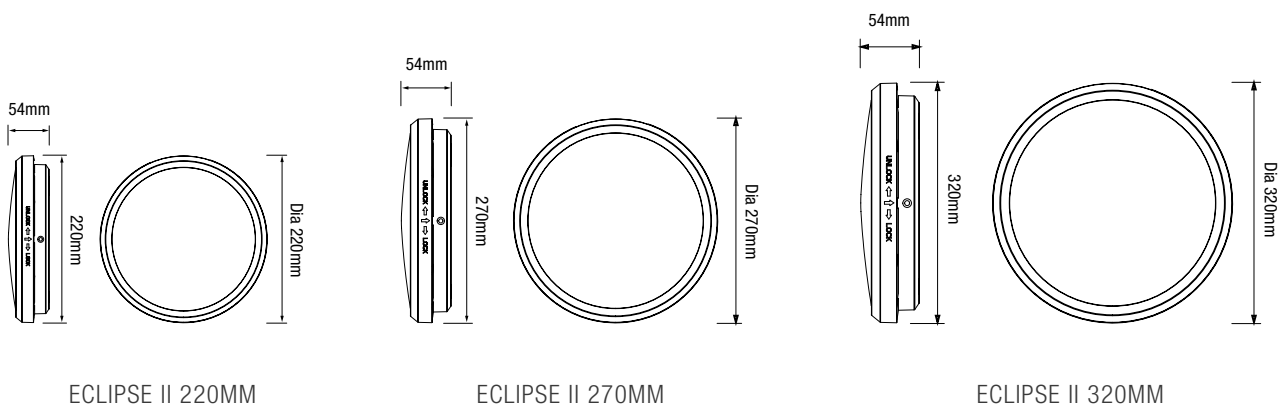

BLADE



IP
Rating



Beam Angle



Replacement
Warranty




Tricolour



Energy
Efficient



| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|--|-------|--------|-------------------------|--------------|
| BLADE SURFACE MOUNTED 20W 600MM WHITE | 20W | 1750lm | 3000K 4000K 5000K | MLBF60345W |
| BLADE SURFACE MOUNTED 36W 1200MM WHITE | 36W | 3400lm | 3000K 4000K 5000K | MLBF12345W |

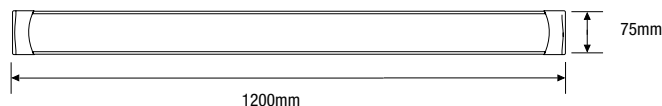

FEATURES

- An easy to install, low profile and versatile IP20 batten
- Extruded aluminium body with opal polycarbonate diffuser
- Available in 600mm and 1200mm
- Switchable colour temperature between 3000K – 4000K – 5000K
- Easy access centre terminal block for wiring and ease of installation
- Direct mounting no brackets required
- Centre cable feed





EXTERIOR LIGHTING

Martec® offers a full range of exterior products with features such as switchable colour temperature, different wattages and ingress protection ratings to suit any outdoor applications. With built in PIR or Microwave Motion sensor provides security and safety in all applications.

DEFENDER



DEFENDER SINGLE
WHITE



DEFENDER SINGLE
MATT BLACK



DEFENDER DOUBLE
WHITE



DEFENDER DOUBLE
MATT BLACK



DEFENDER SINGLE
SENSOR WHITE



DEFENDER SINGLE
SENSOR MATT BLACK



DEFENDER DOUBLE
SENSOR WHITE




DEFENDER DOUBLE
SENSOR MATT BLACK

FEATURES

- Durable ABS construction
- Vertical & horizontal adjustable heads
- IP54 ingress protection for outdoor applications
- Switchable colour temperature between 3000K – 4000K – 5000K
- PIR sensor version available with up to 12m detection angle
- Adjustable time delay, lux level & sensitivity (sensor model only)
- Quick connect base for fast and easy installation
- Suitable for wall or ceiling mounting
- Manual override function
- Double insulated

| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|--|-------|--------|-------------------------|--------------|
| DEFENDER SINGLE TRICOLOUR LED SECURITY LIGHT WHITE | 10W | 1000lm | 3000K 4000K 5000K | MLXD3451W |
| DEFENDER SINGLE TRICOLOUR LED SECURITY LIGHT MATT BLACK | | | | MLXD3451M |
| DEFENDER SINGLE TRICOLOUR LED SECURITY LIGHT SENSOR WHITE | | | | MLXD3451WS |
| DEFENDER SINGLE TRICOLOUR LED SECURITY LIGHT SENSOR MATT BLACK | | | | MLXD3451MS |
| DEFENDER DOUBLE TRICOLOUR LED SECURITY LIGHT WHITE | 20W | 2000lm | 3000K 4000K 5000K | MLXD3452W |
| DEFENDER DOUBLE TRICOLOUR LED SECURITY LIGHT MATT BLACK | | | | MLXD3452M |
| DEFENDER DOUBLE TRICOLOUR LED SECURITY LIGHT SENSOR WHITE | | | | MLXD3452WS |
| DEFENDER DOUBLE TRICOLOUR LED SECURITY LIGHT SENSOR MATT BLACK | | | | MLXD3452MS |

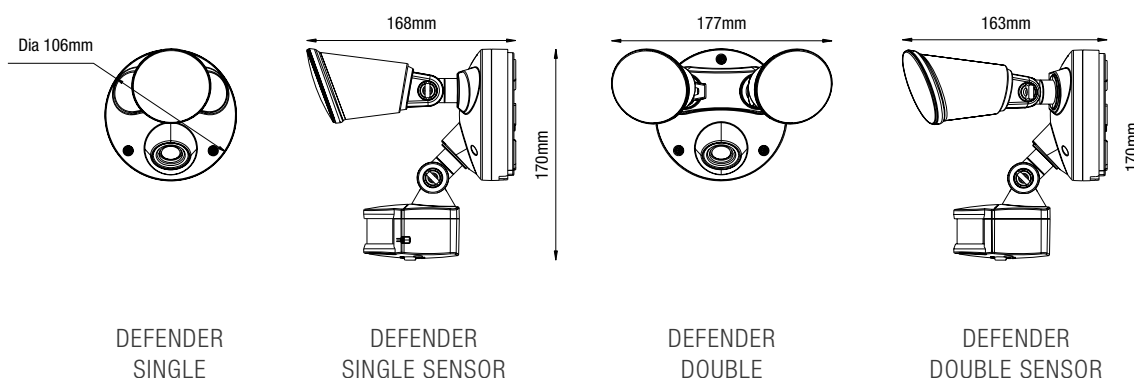

FORTRESS II



FORTRESS II SINGLE
WHITE



FORTRESS II SINGLE
MATT BLACK



FORTRESS II DOUBLE
WHITE



FORTRESS II DOUBLE
MATT BLACK



FORTRESS II SINGLE
SENSOR WHITE



FORTRESS II SINGLE
SENSOR MATT BLACK



FORTRESS II DOUBLE
SENSOR WHITE




FORTRESS II DOUBLE
SENSOR MATT BLACK


FEATURES

- Durable die-cast construction
- IP54 ingress protection for outdoor applications
- Switchable colour temperature between 3000K – 4000K – 5000K
- PIR sensor version available with up to 12m detection angle
- Adjustable time delay, lux level & sensitivity (sensor model only)
- Quick connect base for fast and easy installation
- Suitable for wall or ceiling mounting
- Manual override function
- Double insulated


| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|---|-------|--------|-------------------------|--------------|
| FORTRESS II SINGLE TRICOLOUR LED SECURITY LIGHT WHITE | 15W | 1250lm | 3000K 4000K 5000K | MLXF3451W |
| FORTRESS II SINGLE TRICOLOUR LED SECURITY LIGHT MATT BLACK | | | | MLXF3451M |
| FORTRESS II SINGLE TRICOLOUR LED SECURITY LIGHT SENSOR WHITE | | | | MLXF3451WS |
| FORTRESS II SINGLE TRICOLOUR LED SECURITY LIGHT SENSOR MATT BLACK | | | | MLXF3451MS |
| FORTRESS II DOUBLE TRICOLOUR LED SECURITY LIGHT WHITE | 30W | 2500lm | 3000K 4000K 5000K | MLXF3452W |
| FORTRESS II DOUBLE TRICOLOUR LED SECURITY LIGHT MATT BLACK | | | | MLXF3452M |
| FORTRESS II DOUBLE TRICOLOUR LED SECURITY LIGHT SENSOR WHITE | | | | MLXF3452WS |
| FORTRESS II DOUBLE TRICOLOUR LED SECURITY LIGHT SENSOR MATT BLACK | | | | MLXF3452MS |




FORTRESS II
SINGLE



FORTRESS II
SINGLE SENSOR

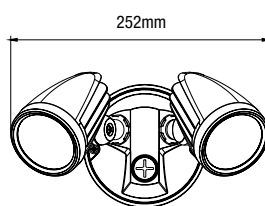

FORTRESS II
DOUBLE



FORTRESS II
DOUBLE SENSOR

RANGER



RANGER SINGLE
MATT BLACK



RANGER SINGLE
SENSOR MATT BLACK



RANGER DOUBLE
MATT BLACK




RANGER DOUBLE
SENSOR MATT BLACK

FEATURES

- Durable ABS construction
- IP54 ingress protection
- Switchable colour temperature between 3000K – 4000K – 5000K
- PIR sensor version available with up to 12m detection angle
- Adjustable time delay, lux level & sensitivity (sensor model only)
- Quick connect base for fast and easy installation
- Suitable for wall or ceiling mounting
- Manual override function
- Double insulated

| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|---|-------|--------|-------------------------|--------------|
| RANGER SINGLE TRICOLOUR LED SECURITY LIGHT MATT BLACK | 12W | 1050lm | 3000K 4000K 5000K | MLXR3451M |
| RANGER SINGLE TRICOLOUR LED SECURITY LIGHT SENSOR MATT BLACK | | | | MLXR3451MS |
| RANGER DOUBLE TRICOLOUR LED SECURITY LIGHT MATT BLACK | 24W | 2100lm | 3000K 4000K 5000K | MLXR3452M |
| RANGER DOUBLE TRICOLOUR LED SECURITY LIGHT SENSOR MATT BLACK | | | | MLXR3452MS |

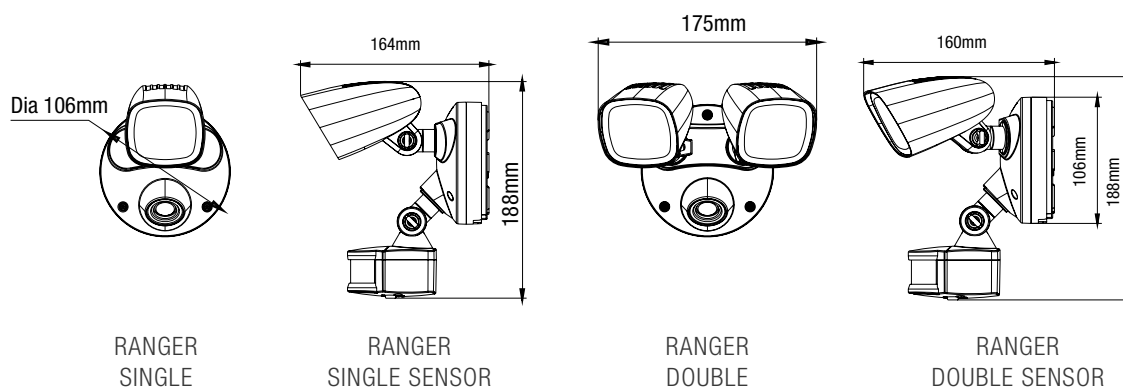

GUARD



GUARD 10W



GUARD 20W



GUARD SENSOR 20W



GUARD 30W



GUARD 50W




GUARD 100W

FEATURES


- Durable black powder coated finish
- Stainless steel angled bracket for easy installation and tempered glass
- Low glare diffuser
- IP65 ingress protection for outdoor applications
- 5 different lumen packages from 800lm to 8000lm
- Switchable colour temperature between 3000K – 4000K – 5000K
- Detection range Up to 12m with 180° detection angle
- Supplied with 600mm flex and plug for easy installation (neoprene cable)
- Double insulated




| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|--|-------|------------------|-------------------------|--------------|
| GUARD TRICOLOUR LED FLOOD LIGHT MATT BLACK | 10W | 700lm | 3000K | MLXG34510M |
| | | 800lm | 4000K | |
| | | | 5000K | |
| | 20W | 1400lm | 3000K | MLXG34520M |
| | | 1600lm | 4000K | |
| | | | 5000K | |
| | 30W | 2100lm | 3000K | MLXG34530M |
| | | 2400lm | 4000K | |
| | | | 5000K | |
| | 50W | 3500lm | 3000K | MLXG34550M |
| | | 4000lm | 4000K | |
| | | | 5000K | |
| | 100W | 7000lm | 3000K | MLXG345100M |
| | | 8000lm | 4000K | |
| | | | 5000K | |
| GUARD TRICOLOUR LED FLOOD LIGHT SENSOR MATT BLACK | 20W | 1400lm 1600lm | 3000K 4000K 5000K | MLXG34520MS |




GUARD 10W

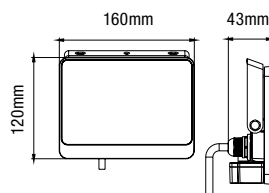


GUARD 20W

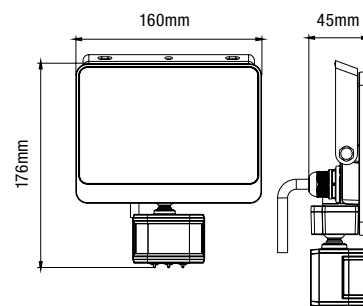


GUARD SENSOR 20W

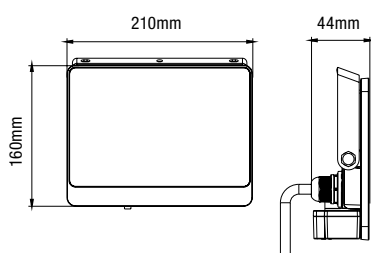

GUARD 30W

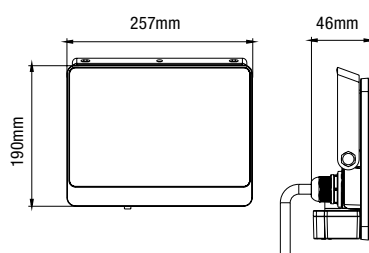

GUARD 50W


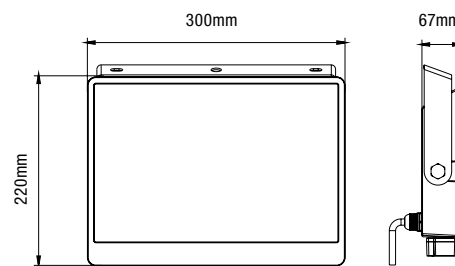


GUARD 100W

PATROL



| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|---|-------|--------|-------------------------|--------------|
| PATROL TRICOLOUR LED FLOOD LIGHT SENSOR MATT BLACK | 20W | 1800lm | 3000K 4000K 5000K | MLXP34520MS |

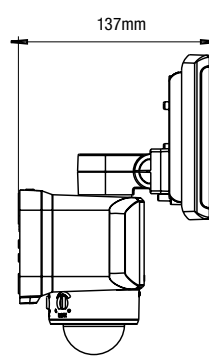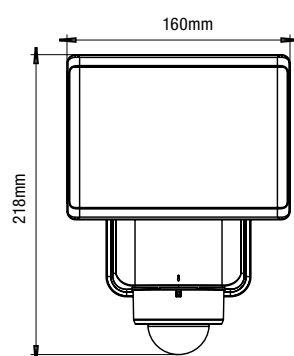

FEATURES


- Strong and robust designed floodlight
- Built in adjustable PIR sensor
- Low glare diffuser
- IP44 ingress protection for outdoor applications
- Switchable colour temperature between 3000K – 4000K – 5000K
- Detection range up to 12m with 180° detection angle
- Adjustable time delay & sensitivity
- Manual override function

ATLAS



EXTERIOR
LIGHTING

| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|--|-------|-------|-------|--------------|
| ATLAS LED SOLAR 5000K SENSOR MATT BLACK | 3W | 300lm | 5000K | MLSA503MS |

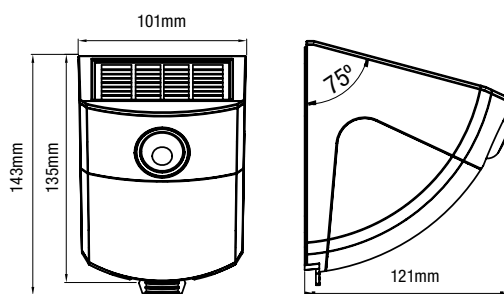

FEATURES

- A modern and multifunctional LED solar powered wall light
- Durable ABS construction and poly silicon solar panel
- Built in PIR sensor
- IP44 ingress protection for outdoor applications
- 5000K colour temperature
- Detection range Up to 7m with 90° detection angle

COVE



COVE 200MM OVAL WHITE
BLACK TRIM INCLUDED



COVE 230MM OVAL WHITE
BLACK TRIM INCLUDED



COVE 175MM ROUND WHITE
BLACK TRIM INCLUDED




COVE 210MM ROUND WHITE
BLACK TRIM INCLUDED


FEATURES

- IP54 ingress protection
- Durable white polycarbonate body and diffuser
- Switchable colour temperature between 3000K – 4000K – 5000K
- Supplied with UV resistant black clip on trim
- Mounting hardware included


| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|--|-------|--------|-------------------------|--------------|
| COVE TRICOLOUR LED BUNKER OVAL 200MM WHITE | 10W | 1000lm | 3000K 4000K 6500K | MLXC034610 |
| COVE TRICOLOUR LED BUNKER OVAL 230MM WHITE | 15W | 1500lm | 3000K 4000K 6500K | MLXC034615 |
| COVE TRICOLOUR LED BUNKER ROUND 175MM WHITE | 10W | 1000lm | 3000K 4000K 6500K | MLXCR34610 |
| COVE TRICOLOUR LED BUNKER ROUND 210MM WHITE | 15W | 1500lm | 3000K 4000K 6500K | MLXCR34615 |

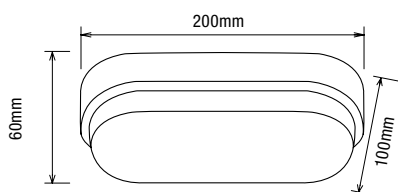


COVE 200MM OVAL

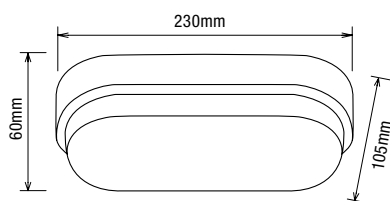


COVE 230MM OVAL




ADDING TRIM SET

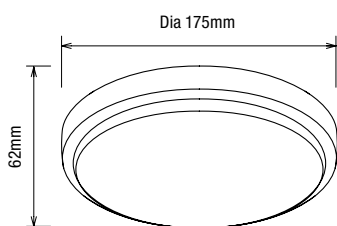

COVE 175MM ROUND

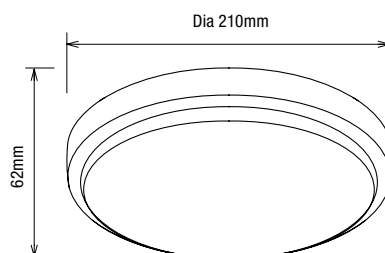

COVE 210MM ROUND




ADDING TRIM SET

SONAR



| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|---------------------------------------|-------|-------|----------------|--------------|
| SONAR LED BUNKER MATT BLACK | 12W | 800lm | 3000K | MLXS34510M |
| SONAR LED BUNKER SENSOR MATT BLACK | | | 4000K 5000K | MLXS34510MS |

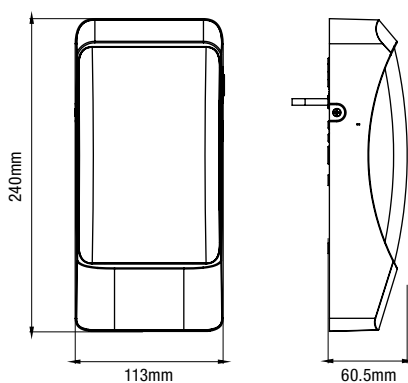

FEATURES

- Durable UV stabilised polycarbonate materials
- Built in PIR sensor
- IP44 ingress protection for outdoor applications
- Switchable colour temperature between 3000K – 4000K – 5000K
- Detection range Up to 12m with 180° detection angle
- Adjustable time delay, lux level & sensitivity (sensor model only)
- Supplied with 2x wall plugs and 2x screws



DIMMERS



ROTARY LED LIGHT DIMMER TRAILING EDGE

ORDERING CODE

| | |
|-------------------------|-----------|
| Rotary LED Light Dimmer | MTD350VAR |
|-------------------------|-----------|



PUSH BUTTON LED LIGHT DIMMER TRAILING EDGE

ORDERING CODE

| | |
|------------------------------|-----------|
| LED Push Button Light Dimmer | MTD350VAP |
|------------------------------|-----------|

FEATURES

- Supply Voltage : 240V AC 50Hz
- Load Wattage 10-350W (1.5A max)
Ta 0- +40°C
- Suitable for most dimmable 240V & 12V lamp sources
- Suitable for 1-way or 2-way operation
- No neutral wiring required
- Soft start for improved lamp life
- Over heating protection
- Indoor use only

FEATURES

- Supply Voltage : 240V AC 50Hz
- Load Wattage 10-350W (1.4A max)
Ta -10- +40°C
- Suitable for most dimmable 240V & 12V lamp sources
- Suitable for 1-way operation only
- No neutral wiring required
- Full short circuit protection
- Soft start for improved lamp life
- Over heating protection
- Minimum brightness adjustable
- Indoor use only



TRADETEC

The Tradetec range offers product with outstanding quality, ease of installation and competitive prices, all available from your local wholesaler.

With our comprehensive portfolio you can fulfil smaller and larger projects with products that are cost-effective and energy-efficient. Developed to suit your project requirements the Tradetec range offers - solutions with up to date LED luminaires that can be implemented all within your budget.

EMERGENCY EXIT



IP
Rating



LED Lifetime





Ambient
Temperature



Viewing
Distance



| MODEL | POWER | CCT | PRODUCT CODE |
|---|-------|-------|--------------|
| TRADETEC EMERGENCY LED EXIT LIGHT CEILING MOUNT | 3.5W | 6000K | TLEEC360 |
| TRADETEC EMERGENCY LED EXIT LIGHT CEILING MOUNT SLIMLINE 6000K | 3.5W | 6000K | TLEESC360 |
| TRADETEC RECESSED MOUNTING KIT FOR SLIMLINE EXIT LIGHT | 3.5W | 6000K | TLEREC |

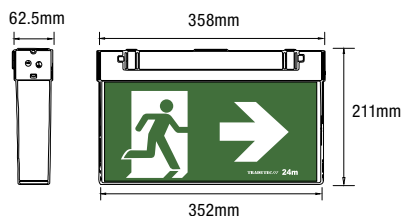

MOUNTING KIT

FEATURES

- Slimline ceiling mount exit
- Class 2 electrical connectivity
- IP20 rated
- 24M viewing distance
- C0:E2.5 C90:E2.0(3hr) Emergency Classification
- Li-ion (LiCoO2) battery
- Compliance to AS/NZS 2293

SLIMFIRE



IP
Rating



D40 Frequency
Classification




AS/NZS
2293
Compliant




Class II




| MODEL | PRODUCT CODE |
|--|--------------|
| SLIMFIRE RECESSED EMERGENCY 140MM WHITE | TLSE23W |
| SLIMFIRE SURFACE MOUNTED EMERGENCY 160MM WHITE | TLSE23WS |

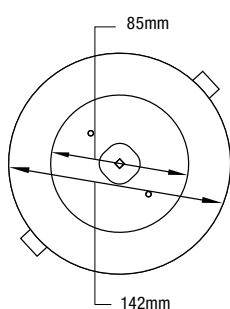

RECESSED

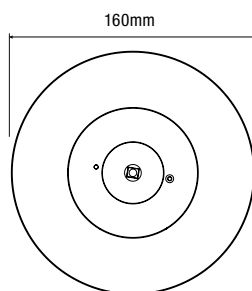

SURFACE MOUNTED

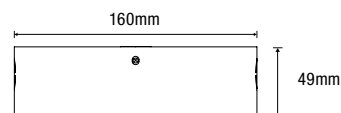

FEATURES

- Recessed model Ø74-80mm cutout or surface mount
- Class 2 electrical connectivity
- IP20 rated
- D40 emergency classification
- Li-ion (LiCoO2) battery
- Supplied with flex and plug
- Compliance to AS/NZS 2293



DIFFUSED BATTEN



IP
Rating



Beam Angle



Ambient
Temperature



LED Lifetime



Replacement
Warranty





Tricolour



Energy
Efficient



| MODEL | POWER | LUMENS | CCT | PRODUCT CODE |
|--|-------|--------|-------------------------|--------------|
| DIFFUSED BATTEN 600MM | 20W | 2000lm | 4000K 5000K 6500K | TLDB34620 |
| DIFFUSED BATTEN 1200MM | | | | TLDB34640 |
| DIFFUSED BATTEN 1200MM MICROWAVE SENSOR | | | | TLDB34640S |
| DIFFUSED BATTEN 1200MM EMERGENCY | 40W | 4000lm | 4000K 5000K 6500K | TLDE34640 |
| DIFFUSED BATTEN 1200MM EMERGENCY MICROWAVE SENSOR | | | | TLDE34640S |

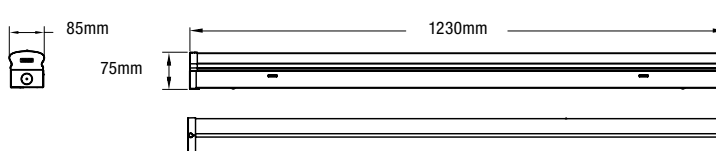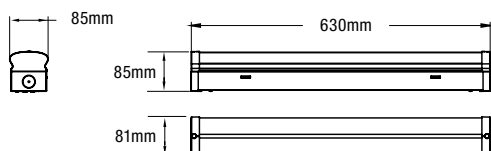


FEATURES

- Available in 600mm and 1200mm
- Switchable colour temperature between 4000K – 5000K – 6500K
- Microwave motion sensor and emergency options available (1200mm model only)
- Back up li-ion emergency battery on EM models
- Sensor detection range up to 14M

WEATHERPROOF BATTEN




| MODEL | POWER | LUMENS | CCT | PRODUCT CODE |
|--|-------|--------|-------------------------|--------------|
| WEATHERPROOF BATTEN 600MM | 18W | 2400lm | 4000K 5000K 6500K | TLWB34618 |
| WEATHERPROOF BATTEN 1200MM | 39W | 4800lm | 4000K 5000K 6500K | TLWB34639 |
| WEATHERPROOF BATTEN 1200MM MICROWAVE SENSOR | | | 4000K 5000K 6500K | TLWB34639S |
| WEATHERPROOF BATTEN 1200MM EMERGENCY | | | 4000K 5000K 6500K | TLWE34639 |
| WEATHERPROOF BATTEN 1200MM EMERGENCY MICROWAVE SENSOR | | | 4000K 5000K 6500K | TLWE34639S |

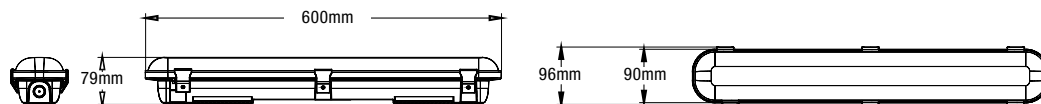


FEATURES

- High quality, low energy lighting in wet and dusty environments
- Available in 600mm and 1200mm
- Switchable colour temperature between 4000K – 5000K – 6500K
- Microwave motion sensor and emergency options available (1200mm model only)
- Back up li-ion emergency battery on EM models
- Sensor detection range up to 14M

EXECUTIVE



| MODEL | POWER | LUMEN | CCT | PRODUCT CODE |
|----------------------------|-------|--------|-------------------------|----------------|
| EXECUTIVE LED PANEL 1200MM | 40W | 3500lm | 4000K 5000K 6000K | TLEP456401230W |

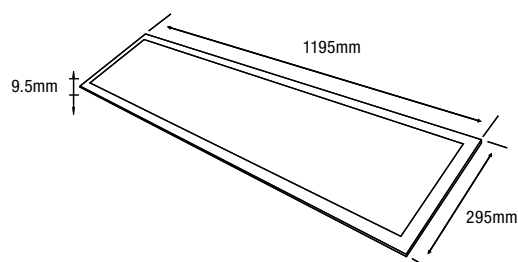

FEATURES

- Elegant and slimline designed recessed panel
- Switchable colour temperature between 4000K – 5000K – 6000K
- Non dimmable



BATHROOM HEATERS



LINEAR
Page 108



VAPOUR
Page 110



ASPIRE
Page 111



PROFILE PANEL
Page 112



PROFILE PLUS
Page 114



UNO
Page 116



FORME
Page 117



CONTOUR
Page 119

EXHAUST FANS



FLOW ROUND
Page 124



FLOW SQUARE
Page 125



SATURN ROUND
Page 126



SATURN SQUARE
Page 127



CORE
Page 128



JET
Page 129

ACCESSORIES



**BATHROOM
HEATER
REMOTE KIT**
Page 131





BATHROOM HEATERS

Martec® bathroom heaters come in a wide variety from a simple single heat lamp unit, to slimline designed 3-in-1 heaters.

Along with different IPX rating and colour finishes enable our heaters to compliment any design scheme and environment at your home.



In Home Warranty*
*Excludes Heat Lamps



IPX2 Water
Resistant



1000W Radiant Heat
Tube Technology



High Performance
Ball Bearing Motor



High Extraction



Radiant
Heat Tube



Ultra Quiet
Operation



Ultra Low Profile




Turbo Fan Design

Linear

600m³/hr
Maximum Airflow



LINEAR

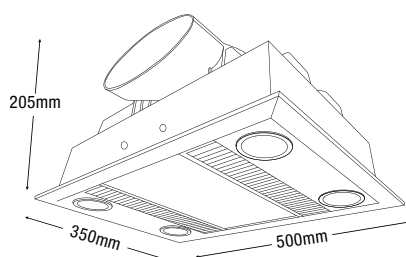

| CONSUMABLE | ORDERING CODE |
|------------------|---------------|
| 1000W Heat Globe | MRL1000W |
| 6W GU10 Globe 3K | MBGU306 |
| 6W GU10 Globe 5K | MBGU506 |

BATHROOM HEATER SPECIFICATIONS

| CUTOUT SIZE | 450mm x 300mm |
|--------------------------------|---------------|
| GRILL SIZE | 500mm x 350mm |
| MINIMUM CEILING DEPTH REQUIRED | 210mm |
| HEAT LAMP WATTAGE | 1x1000W |
| AIRFLOW CUBIC METRE PER HR | 600 |
| LUMEN OUTPUT | 2520 |
| MODEL | ORDERING CODE |
| WHITE | MBHL1000W |
| SILVER | MBHL1000S |

FEATURES

- 1x 1000W R7s Halogen Heat globe
- 4 x 6W GU10 LED globes
- Ball Bearing Motor
- Quiet Operation
- 3 gang wall switch included
- Side ducting & external grill included
- Draft Stopper included
- Modern Slimline design
- Internal Thermal cut out safety switch
- MBHREM remote kit adaptable (not included) (see p.131 for details)



Linear Mini

480m³/hr
Maximum Airflow



LINEAR MINI



2 YEAR
In Home Warranty*
*Excludes Heat Lamps



IPX2
Water
Resistant



High Performance
Ball Bearing Motor



High Extraction



Radiant
Heat Tube



Ultra Quiet
Operation



Ultra Low Profile




Turbo Fan Design

BATHROOM
HEATERS

BATHROOM HEATER SPECIFICATIONS

| | |
|--------------------------------|----------------------|
| CUTOUT SIZE | 350mm x 305mm |
| GRILL SIZE | 396mm x 350mm |
| MINIMUM CEILING DEPTH REQUIRED | 250mm |
| HEAT LAMP WATTAGE | 1 x 1000W |
| AIRFLOW CUBIC METRE PER HR | 480 |
| LUMEN OUTPUT | 1080 |
| MODEL | ORDERING CODE |
| WHITE | MBHM1000W |
| SILVER | MBHM1000S |

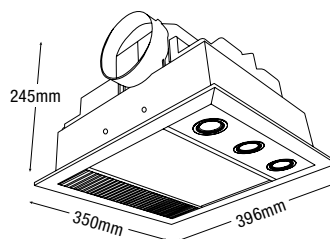

| CONSUMABLE | ORDERING CODE |
|------------------|---------------|
| 1000W Heat Globe | MRL1000W |
| 6W GU10 Globe 3K | MBGU306 |
| 6W GU10 Globe 5K | MBGU506 |

FEATURES

- 1x 1000W R7s Halogen Heat globe
- 3 x 6W GU10 LED globes
- Ball Bearing Motor
- Quiet Operation
- 3 gang wall switch included
- Side ducting & external grill included
- Draft Stopper included
- Modern Slimline design
- Internal Thermal cut out safety switch
- MBHREM remote kit adaptable (not included)
(see p.131 for details)



In Home Warranty*
*Excludes Heat Lamps



IPX2 Water
Resistant



High Performance
Ball Bearing Motor



High Extraction



PTC Heating Element



Quiet Operation



Ultra Low Profile



Tricolour LED

Vapour

380m³/hr
Maximum Airflow



VAPOUR



BATHROOM
HEATERS

BATHROOM HEATER SPECIFICATIONS

| | |
|--------------------------------|----------------------|
| CUTOUT SIZE | 523mm x 345mm |
| GRILL SIZE | 540mm x 376mm |
| MINIMUM CEILING DEPTH REQUIRED | 200mm |
| HEAT LAMP WATTAGE | 2x 1000W |
| AIRFLOW CUBIC METRE PER HR | 380m ³ /h |
| LUMEN OUTPUT | ≥900lm |

MODEL ORDERING CODE

| | |
|--------|-----------|
| VAPOUR | MBHV2000W |
|--------|-----------|

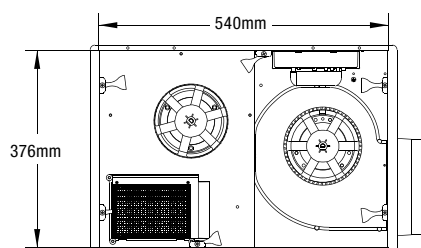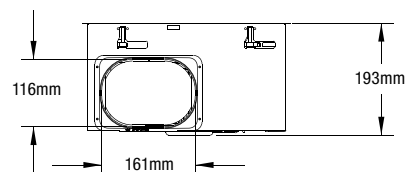

FEATURES

- 2 x 1000W PTC heat elements
- 12W Tricolour LED light
- Ball Bearing Motor
- Quiet Operation
- 5 gang wall switch included
- Side ducting & external grill included
- Draft Stopper included
- Modern Slimline design
- Half Heat Function
- Internal Thermal cut out safety switch
- MBHREM remote kit adaptable (not included) (see p.131 for details)



Aspire

380m³/hr
Maximum Airflow



In Home Warranty*



Energy Efficient



IPX2 Rating



High Performance
Ball Bearing Motor



High Extraction



Radiant
Heat Tube



Heat Setting





Ultra Low Profile



Tricolour



ASPIRE

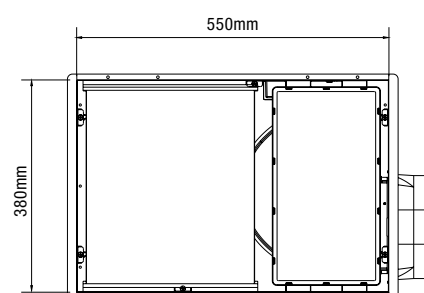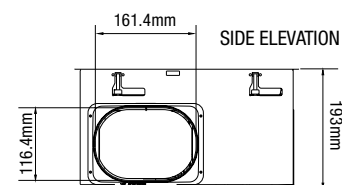

TOP VIEW ELEVATION

BATHROOM HEATER SPECIFICATIONS

| | |
|--------------------------------|---------------|
| CUTOUT SIZE | 523mm x 345mm |
| GRILL SIZE | 380mm x 550mm |
| MINIMUM CEILING DEPTH REQUIRED | 210mm |
| HEAT LAMP WATTAGE | 2 x 400W |
| AIRFLOW CUBIC METRE PER HR | 380 |
| LUMEN OUTPUT | 1569 |

| MODEL | ORDERING CODE |
|--------------|---------------|
| ASPIRE WHITE | MBHA800W |

| CONSUMABLE | ORDERING CODE |
|-----------------|---------------|
| 400W Heat Globe | MRL400W |

FEATURES

- 2 x 400W Infrared heat tube
- 20W Tricolour LED light
- Ball Bearing Motor
- Quiet Operation
- 4 gang wall switch included
- Side ducting & external grill included
- Draft Stopper included
- Modern Slimline design
- Half Heat Function
- Internal Thermal cut out safety switch
- MBHREM remote kit adaptable (not included) (see p.131 for details)



In Home Warranty*
*Excludes Heat Lamps



IPX2 Water Resistant



Ball Bearing Motor



Draft Stopper



Instant Radiant Heat



Quiet Operation



Slimline Fitting



Hard-wired Connection



Easy Side Vent Access



Tricolour

Profile Panel 2

460m³/hr
Maximum Airflow




PROFILE PANEL 2

BATHROOM
HEATERS

BATHROOM HEATER SPECIFICATIONS

| CUTOUT SIZE | 435mm x 255mm |
|--------------------------------|---------------|
| GRILL SIZE | 480mm x 300mm |
| MINIMUM CEILING DEPTH REQUIRED | 220mm |
| HEAT LAMP WATTAGE | 2 x 275W |
| AIRFLOW CUBIC METRE PER HR | 460 |
| LUMEN OUTPUT | 900 |
| MODEL | ORDERING CODE |
| WHITE | MBHN2LW |

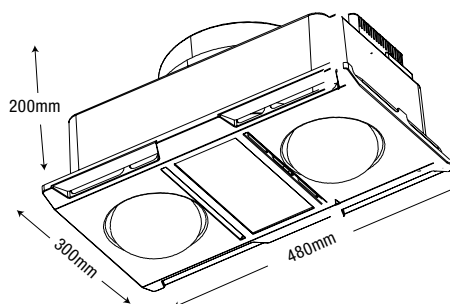

| CONSUMABLE | ORDERING CODE |
|-------------------------|---------------|
| 275W Infrared Heat Lamp | MRL275W |

FEATURES

- 2 x 275W Heat lamp
- 12W Tricolour LED light
- Ball Bearing Motor
- Quiet Operation
- 3 gang wall switch included
- Side ducting & external grill included
- Draft Stopper included
- Modern Slimline design
- Internal Thermal cut out safety switch
- MBHREM remote kit adaptable (not included) (see p.131 for details)



460m³/hr
Maximum Airflow



PROFILE PANEL 4



2 YEAR
In Home Warranty*
*Excludes Heat Lamps



IPX2 Water Resistant



Ball Bearing Motor



Draft Stopper



Instant Radiant Heat



Quiet Operation



Slimline Fitting



Hard-wired Connection




Easy Side Vent Access



Tricolour

BATHROOM HEATER SPECIFICATIONS

| CUTOUT SIZE | 435mm x 275mm |
|--------------------------------|---------------|
| GRILL SIZE | 480mm x 360mm |
| MINIMUM CEILING DEPTH REQUIRED | 220mm |
| HEAT LAMP WATTAGE | 4 X 275W |
| AIRFLOW CUBIC METRE PER HR | 460 |
| LUMEN OUTPUT | 900 |
| MODEL | ORDERING CODE |
| WHITE | MBHN4LW |

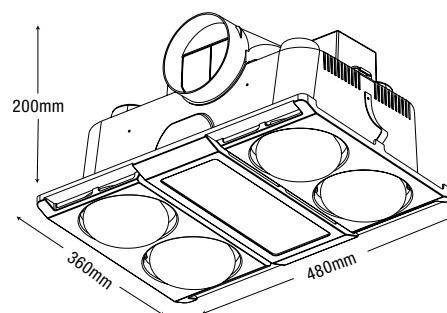

CONSUMABLE

275W Infrared Heat Lamp

ORDERING CODE

MRL275W



FEATURES

- 4 x 275W Heat lamp
- 12W Tricolour LED light
- Ball Bearing Motor
- Quiet Operation
- 4 gang wall switch included
- Side ducting & external grill included
- Draft Stopper included
- Slim Profile design
- Half Heat Function
- Internal Thermal cut out safety switch
- MBHREM remote kit adaptable (not included) (see p.131 for details)





In Home Warranty*
*Excludes Heat Lamps



Energy Efficient



IPX2 Water Resistant



High Performance
Ball Bearing Motor



High Extraction



Instant Radiant Heat



Ultra Low Profile

Profile Plus 2

460m³/hr
Maximum Airflow




PROFILE PLUS 2



BATHROOM
HEATERS

BATHROOM HEATER SPECIFICATIONS

| | |
|--------------------------------|----------------------|
| CUTOUT SIZE | 435mm x 255mm |
| GRILL SIZE | 480mm x 300mm |
| MINIMUM CEILING DEPTH REQUIRED | 210mm |
| HEAT LAMP WATTAGE | 2 x 275W |
| AIRFLOW CUBIC METRE PER HR | 460 |
| LUMEN OUTPUT | 1890 |
| MODEL | ORDERING CODE |
| WHITE | MBHP2LW |
| SILVER | MBHP2LS |

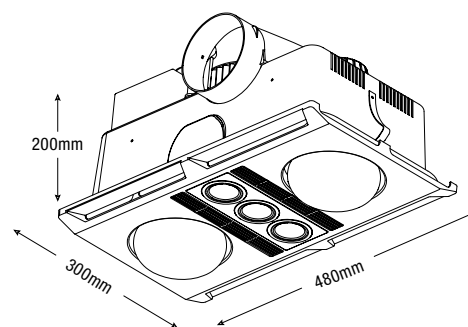

| CONSUMABLE | ORDERING CODE |
|-------------------------|---------------|
| 275W Infrared Heat Lamp | MRL275W |
| 6W GU10 Globe 3K | MBGU306 |
| 6W GU10 Globe 5K | MBGU506 |

FEATURES

- 2 x 275W Heat lamp
- 3 x 6W LED 3000k GU10 lamp
- Ball Bearing Motor
- Quiet Operation
- 3 gang wall switch included
- Side ducting & external grill included
- Draft Stopper included
- Slim Profile design
- Internal Thermal cut out safety switch
- MBHREM remote kit adaptable (not included)
(see p.131 for details)



Profile Plus 4

460m³/hr
Maximum Airflow



PROFILE PLUS 4



2
YEAR

In Home Warranty*
*Excludes Heat Lamps



Energy Efficient



IPX2 Water Resistant



High Performance
Ball Bearing Motor



High Extraction



Instant Radiant Heat




Ultra Low Profile

BATHROOM HEATER SPECIFICATIONS

| | |
|--------------------------------|---------------|
| CUTOUT SIZE | 435mm x 275mm |
| GRILL SIZE | 480mm x 360mm |
| MINIMUM CEILING DEPTH REQUIRED | 210mm |
| HEAT LAMP WATTAGE | 4 x 275W |
| AIRFLOW CUBIC METRE PER HR | 460 |
| LUMEN OUTPUT | 2680 |

| MODEL | ORDERING CODE |
|--------|---------------|
| WHITE | MBHP4LW |
| SILVER | MBHP4LS |

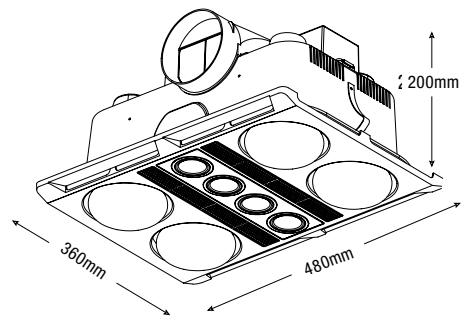

CONSUMABLE

| |
|-------------------------|
| 275W Infrared Heat Lamp |
| 6W GU10 Globe 3K |
| 6W GU10 Globe 5K |

ORDERING CODE

| |
|---------|
| MRL275W |
| MBGU306 |
| MBGU506 |



BATHROOM
HEATERS

FEATURES

- 4 x 275W Heat lamp
- 4 x 6W LED 3000k GU10 lamp
- Ball Bearing Motor
- Quiet Operation
- 4 gang wall switch included
- Side ducting & external grill included
- Draft Stopper included
- Slim Profile design
- Half Heat Function
- Internal Thermal cut out safety switch
- MBHREM remote kit adaptable (not included) (see p.131 for details)



In Home Warranty*



Water Resistant Rating



Instant Infrared Heat




UNO

BATHROOM
HEATERS

BATHROOM HEATER SPECIFICATIONS

| | |
|------------------------|------------------|
| SUPPLY VOLTAGE | 230-240 a.c 50Hz |
| POWER RATING | 275W |
| CEILING CUT OUT | 155mm |
| PROJECTED INTO CEILING | 215mm |
| REQUIRED CEILING DEPTH | 315mm |
| FASCIA SIZE | 180mm |
| FASCIA PROTRUSION | 25mm |

| MODEL | ORDERING CODE |
|-------|---------------|
| White | MBHU1LW |

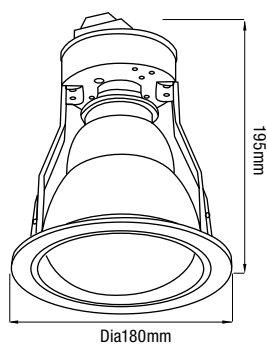

CONSUMABLE

275W Infrared Heat Lamp

ORDERING CODE

MRL275W

FEATURES

- Instant Powerful Heating
- Ideal for Bathrooms where instant heat is required
- Infrared lamps heat by direct radiation rather than heating air in the room
- Heat Lamps to be installed directly over the drying area
- Not dimmable



Forme 2

300m³/hr
Maximum Airflow



FORME 2

2
YEAR

In Home Warranty*
*Excludes Heat Lamps



Energy Efficient



IPX4 Water Resistant



High Performance
Ball Bearing Motor



Instant Radiant Heat



Ultra Low Profile




Tricolour

BATHROOM HEATER SPECIFICATIONS

| | |
|--------------------------------|---------------|
| CUTOUT SIZE | 375mm x 202mm |
| GRILL SIZE | 386mm x 215mm |
| MINIMUM CEILING DEPTH REQUIRED | 197mm |
| HEAT LAMP WATTAGE | 2 X 275W |
| AIRFLOW CUBIC METRE PER HR | 300 |
| LUMEN OUTPUT | 600 |

| MODEL | ORDERING CODE |
|-------|---------------|
| WHITE | MBHF2LW |

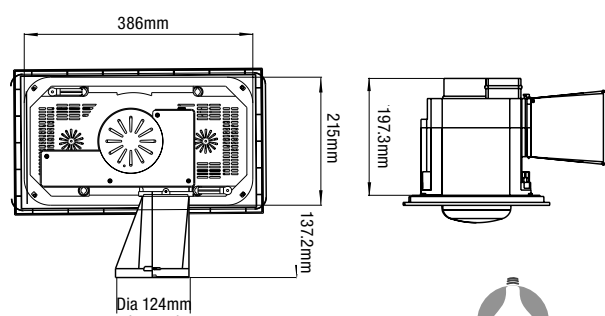

| CONSUMABLE | ORDERING CODE |
|-------------------------|---------------|
| 275W Infrared Heat Lamp | MRL275W |



BATHROOM
HEATERS

FEATURES

- 2 x 275W Heat lamp
- 10W Tricolour LED light
- Ball Bearing Motor
- Quiet Operation
- 3 gang wall switch included
- Side ducting & external grill included
- Draft Stopper included
- Modern Slimline design
- Internal Thermal cut out safety switch
- MBHREM remote kit adaptable (not included) (see p.131 for details)



In Home Warranty*
*Excludes Heat Lamps



Energy Efficient



IPX4 Water Resistant



High Performance
Ball Bearing Motor



Instant Radiant Heat



Ultra Low Profile



Tricolour

Forme 4

300m³/hr
Maximum Airflow





FORME 4

BATHROOM HEATER SPECIFICATIONS

| | |
|--------------------------------|---------------|
| CUTOUT SIZE | 320mm x 320mm |
| GRILL SIZE | 407mm x 340mm |
| MINIMUM CEILING DEPTH REQUIRED | 202mm |
| HEAT LAMP WATTAGE | 4 X 275W |
| AIRFLOW CUBIC METRE PER HR | 300 |
| LUMEN OUTPUT | 600 |

| MODEL | ORDERING CODE |
|-------|---------------|
| WHITE | MBHF4LW |

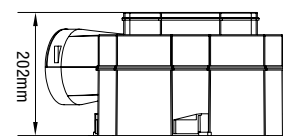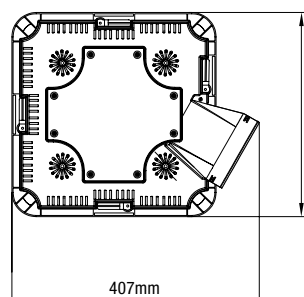

| CONSUMABLE | ORDERING CODE |
|-------------------------|---------------|
| 275W Infrared Heat Lamp | MRL275W |

FEATURES

- 4 x 275W Heat lamp
- 10W Tricolour LED light
- Ball Bearing Motor
- Quiet Operation
- 4 gang wall switch included
- Side ducting & external grill included
- Draft Stopper included
- Modern Slimline design
- Half Heat Function
- Internal Thermal cut out safety switch
- MBHREM remote kit adaptable (not included) (see p.131 for details)





In Home Warranty*



Water Resistant Rating



Instant Infrared Heat




CONTOUR 1



BATHROOM
HEATERS

BATHROOM HEATER SPECIFICATIONS

| CUTOUT SIZE | 166mm x 166mm |
|--------------------------------|---------------|
| GRILL SIZE | 210mm x 210mm |
| MINIMUM CEILING DEPTH REQUIRED | 180mm |
| HEAT LAMP WATTAGE | 275W |
| AIRFLOW CUBIC METRE PER HR | NA |
| MODEL | ORDERING CODE |
| WHITE | MBHC1LW |
| SILVER | MBHC1LS |

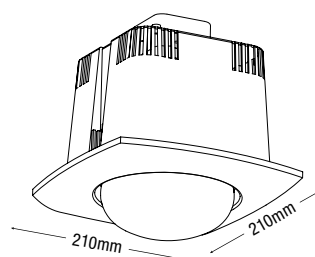

CONSUMABLE

275W Infrared Heat Lamp

ORDERING CODE

MRL275W

FEATURES

- Instant Infrared Heat lamp only
- 1x 275W Heat lamp
- Slim Profile design
- 180mm minimum ceiling depth



In Home Warranty*



Water Resistant Rating



High Performance
Ball Bearing Motor



Instant Infrared Heat



Turbo Fan Design



Easy Side Ducting Access

Contour 2

240m³/hr
Maximum Airflow



CONTOUR 2




BATHROOM
HEATERS

BATHROOM HEATER SPECIFICATIONS

| | |
|--------------------------------|---------------|
| CUTOUT SIZE | 390mm x 220mm |
| GRILL SIZE | 440mm x 285mm |
| MINIMUM CEILING DEPTH REQUIRED | 200mm |
| HEAT LAMP WATTAGE | 2 x 275W |
| AIRFLOW CUBIC METRE PER HR | 240 |

| MODEL | ORDERING CODE |
|--------|---------------|
| WHITE | MBHC2LW |
| SILVER | MBHC2LS |

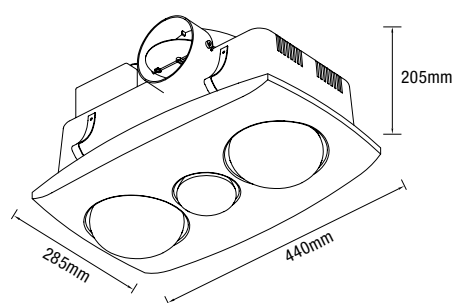

| CONSUMABLE | ORDERING CODE |
|-------------------------|---------------|
| 275W Infrared Heat Lamp | MRL275W |
| 8W 3000k LED R80 lamp | MRL3K8W |

FEATURES

- 2 x 275W Heat lamp
- 1x 8w LED 3000k R80 lamp
- Ball Bearing Motor
- Quiet Operation
- 3 gang wall switch included
- Side ducting & external grill included
- Draft Stopper included
- Slim Profile design
- MBHREM remote kit adaptable (not included) (see p.131 for details)



Contour 4

250m³/hr
Maximum Airflow



In Home Warranty*



Water Resistant Rating



High Performance
Ball Bearing Motor



Instant Infrared Heat



Turbo Fan Design



Easy Side Ducting Access




CONTOUR 4



BATHROOM HEATER SPECIFICATIONS

| | |
|--------------------------------|---------------|
| CUTOUT SIZE | 300mm x 300mm |
| GRILL SIZE | 400mm x 360mm |
| MINIMUM CEILING DEPTH REQUIRED | 200mm |
| HEAT LAMP WATTAGE | 4 x 275W |
| AIRFLOW CUBIC METRE PER HR | 250 |

| MODEL | ORDERING CODE |
|--------|---------------|
| WHITE | MBHC4LW |
| SILVER | MBHC4LS |

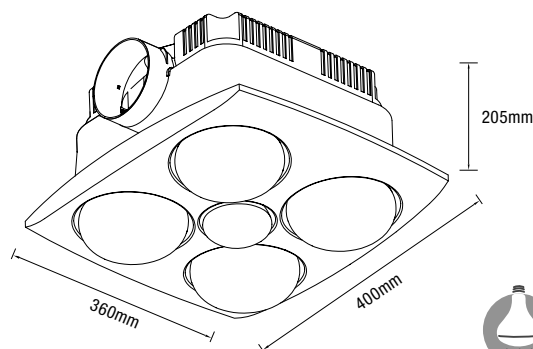

CONSUMABLE

275W Infrared Heat Lamp

8W 3000k LED R80 lamp

ORDERING CODE

MRL275W

MRL3K8W

FEATURES

- 2 year In home Warranty
- 300mm x 300mm Cut out size
- 400mm x 260mm Grill size
- 200mm minimum ceiling depth
- 4 x 275W Heat lamp
- 1x 8w LED 3000k R80 lamp
- Ball Bearing Motor
- Quiet Operation
- 4 gang wall switch included
- Side ducting & external grill included
- Draft Stopper included
- Slim Profile design
- Half Heat Function
- MBHREM remote kit adaptable (not included) (see p.131 for details)



For more product information please visit our website.

martecaustralia.com.au /// 121





EXHAUST FANS

Martec® exhaust fans feature different sizes, IPX rating, shape, and tricolour LED light option. Our exhaust fans are operated on high performance ball bearing motor with superior blade design for maximum air extraction – quiet operations. Plus, always supplied with flex and plug made installation easier.

2
YEAR

Replacement Warranty



Protected from Dripping Water



Fully Concealed
Motor Housing



Built-in Draft Stopper



Quiet Operation



Ultra Low Profile



Turbo Fan Design



Easy Side Ducting Access



Tricolour

Flow Round 250

290m³/hr
Maximum Airflow





Flow Round 300

390m³/hr
Maximum Airflow



FLOW ROUND

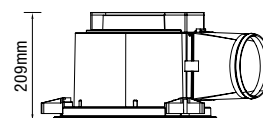

| BATHROOM HEATER SPECIFICATIONS | FLOW ROUND 250 | FLOW ROUND 300 | FLOW ROUND 250 WITH LIGHT | FLOW ROUND 300 WITH LIGHT |
|--------------------------------|----------------|----------------|---------------------------|---------------------------|
| CUTOUT SIZE | 240mm | 295mm | 240mm | 295mm |
| GRILL SIZE | 265mm | 312mm | 265mm | 312mm |
| MINIMUM CEILING DEPTH REQUIRED | 180mm | 180mm | 180mm | 180mm |
| AIRFLOW CUBIC METRE PER HR | 290 | 390 | 290 | 390 |
| LUMEN OUTPUT | - | - | 800 | 800 |
| MODEL | ORDERING CODE | | | |
| WHITE | MXFFR25W | MXFFR30W | MXFLFR25W | MXFLFR30W |

FEATURES

- Ball bearing motor
- Draft stopper included
- Quiet operation
- Low profile design
- Light model includes 12W Tricolour LED

Flow Square 250

Flow Square 300



290m³/hr
Maximum Airflow



390m³/hr
Maximum Airflow



FLOW SQUARE

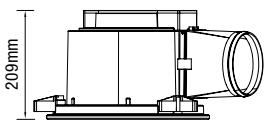

2
YEAR

Replacement Warranty



Protected from Dripping Water



Fully Concealed Motor Housing



Built-in Draft Stopper



Quiet Operation



Ultra Low Profile



Turbo Fan Design



Easy Side Ducting Access



Tricolour

| BATHROOM HEATER SPECIFICATIONS | FLOW SQUARE 250 | FLOW SQUARE 300 | FLOW SQUARE 250 WITH LIGHT | FLOW SQUARE 300 WITH LIGHT |
|--------------------------------|-----------------|-----------------|----------------------------|----------------------------|
| CUTOUT SIZE | 240mm | 295mm | 240mm | 295mm |
| GRILL SIZE | 275mm x 275mm | 305mm x 305mm | 275mm x 275mm | 305mm x 305mm |
| MINIMUM CEILING DEPTH REQUIRED | 180mm | 180mm | 180mm | 180mm |
| AIRFLOW CUBIC METRE PER HR | 290 | 390 | 290 | 390 |
| LUMEN OUTPUT | - | - | 800 | 800 |
| MODEL | ORDERING CODE | | | |
| WHITE | MXFFS25W | MXFFS30W | MXFLFS25W | MXFLFS30W |

FEATURES

- Ball bearing motor
- Quiet operation
- Draft stopper included
- Low profile design
- Light model includes 12W Tricolour LED



Replacement Warranty



IP Rating



High Volume
Air Extraction for 25W



High Volume
Air Extraction for 28W



Draft Stopper



Quiet Operation



Flex & Plug

Saturn Round 25W

270m³/hr
Maximum Airflow



Saturn Round 28W


320m³/hr
Maximum Airflow




SATURN ROUND

| BATHROOM EXHAUST FAN SPECIFICATIONS | SATURN ROUND 25W | SATURN ROUND 28W |
|-------------------------------------|------------------------------------|------------------|
| CUTOUT SIZE | 240mm | 295mm |
| GRILL SIZE | 270mm | 325mm |
| MINIMUM CEILING DEPTH REQUIRED | 220mm | 220mm |
| AIRFLOW CUBIC METRE PER HR | 270 | 320 |
| IP RATING | IPX4 | |
| NOISE (DB) | <45dB | |
| CONNECTION | 0.9 cable with approved 3 pin plug | |
| MATERIAL | Plastic | |
| FAN BLADE SIZE DIAMETER | 124mm | 144mm |
| DUCTABLE | Side ducted | |
| MODEL | ORDERING CODE | |
| WHITE | MXFSR20W | MXFSR25W |

SATURN 270MM - Round

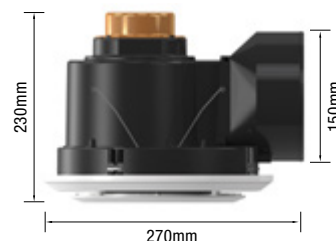

SATURN 325MM - Round

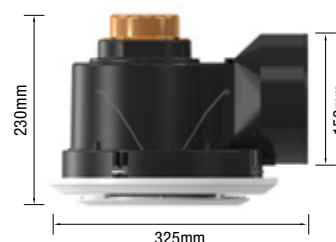

FEATURES

- DIY high velocity exhaust fan with fitted back draft damper
- Turbo cylinder fan blade design for powerful air-steam extraction
- Exhaust fan with removable easy clean cover
- Ultra quiet ball bearing motor
- Easy installation clamps to fit and secure fan into ceiling
- 150mm diameter side ducting for easy duct installation
- Self sealing exhaust damper to prevent drafts
- 0.9 Metre flex and 3 pin plug
- Requires a separate switched surface socket for DIY installation
- Complete with white fascia plate



Saturn Square 25W

Saturn Square 28W

270m³/hr
Maximum Airflow



320m³/hr
Maximum Airflow



SATURN SQUARE

2
YEAR

Replacement Warranty

IPX4

IP Rating

270m³/hr

High Volume
Air Extraction for 25W

320m³/hr

High Volume
Air Extraction for 28W

Draft Stopper

Draft Stopper

Quiet Operation


Quiet Operation

DIY


Flex & Plug

| BATHROOM EXHAUST FAN SPECIFICATIONS | SATURN SQUARE 25W | SATURN SQUARE 28W |
|-------------------------------------|------------------------------------|-------------------|
| CUTOUT SIZE | 240mm | 295mm |
| GRILL SIZE | 270mm | 325mm |
| MINIMUM CEILING DEPTH REQUIRED | 220mm | 220mm |
| AIRFLOW CUBIC METRE PER HR | 270 | 320 |
| IP RATING | IPX4 | |
| NOISE (DB) | <45dB | |
| CONNECTION | 0.9 cable with approved 3 pin plug | |
| MATERIAL | Plastic | |
| FAN BLADE SIZE DIAMETER | 124mm | 144mm |
| DUCTABLE | Side ducted | |
| MODEL | ORDERING CODE | |
| WHITE | MXFSS20W | MXFSS25W |

SATURN 270MM - Square

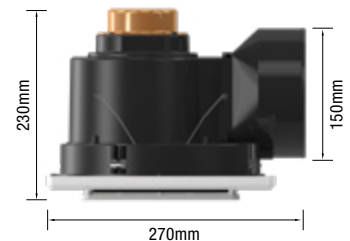

SATURN 325MM - Square

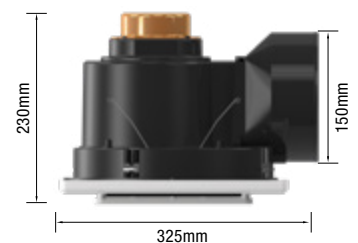EXHAUST
FANS

FEATURES

- DIY high velocity exhaust fan with fitted back draft damper
- Turbo cylinder fan blade design for powerful air-steam extraction
- Exhaust fan with removable easy clean cover
- Ultra quiet ball bearing motor
- Easy installation clamps to fit and secure fan into ceiling
- 150mm diameter side ducting for easy duct installation
- Self sealing exhaust damper to prevent drafts
- 0.9 Metre flex and 3 pin plug
- Requires a separate switched surface socket for DIY installation
- Complete with white fascia plate

2
YEAR

Replacement Warranty



Energy Efficient

25W

Motor - Core 200

35W

Motor - Core 250



Premium Bearings



High Volume Air Extraction



Quiet Operation



Flex & Plug



Double Insulation

Core 200

310m³/hr
Maximum Airflow



Core 250



540m³/hr
Maximum Airflow



CORE



CORE 200

Dia 266mm
Dia 240mm



CORE 250

Dia 318mm
Dia 290mm



| BATHROOM EXHAUST FAN SPECIFICATIONS | CORE 200 | CORE 250 |
|-------------------------------------|----------------------------------|----------------------------------|
| CUTOUT SIZE | 240mm diameter | 290mm diameter |
| GRILL SIZE | 300mm | 358mm |
| VOLTAGE | 220~240V – AC – 50Hz | 220~240V – AC – 50Hz |
| BALL BEARING MOTOR | 25W | 35W |
| NOISE LEVEL (Db) | <43 dB(A) | <51 dB(A) |
| AIRFLOW CUBIC METRE PER HR | 310 | 540 |
| INSULATION | Double insulation | Double insulation |
| DIY FLEX AND PLUG | DIY flex and 3 pin plug included | DIY flex and 3 pin plug included |
| MODEL | ORDERING CODE | ORDERING CODE |
| WHITE | MXFC20W | MXFC25W |

FEATURES

- Traditional design exhaust fan
- Long life ball bearing motor
- DIY plug and lead included
- High air extraction
- Quiet operation
- Easy to clean removable grill



Jet 250 / Jet 300

350m³/hr
Maximum Airflow



JET

2
YEAR

Replacement
Warranty

IP
X2

IP Rating

35W

Wattage



High Performance Long
Life Ball Bearing Motor



350m³/hr
High Extraction




Energy Saving
Draft Stopper




DIY Flex & Plug

| BATHROOM HEATER SPECIFICATIONS | JET 250 | JET 300 |
|--------------------------------|---------------|---------|
| CUTOUT SIZE | 242mm | 295mm |
| GRILL SIZE | 272mm | 326mm |
| MINIMUM CEILING DEPTH REQUIRED | 180mm | 180mm |
| HEAT LAMP WATTAGE | - | - |
| AIRFLOW CUBIC METRE PER HR | 350 | 350 |
| MODEL | ORDERING CODE | |
| WHITE | MXFJ25W | MXFJ30W |

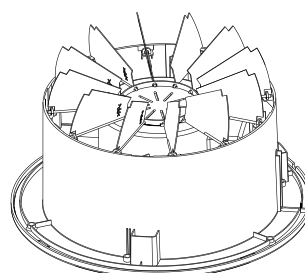

326mm

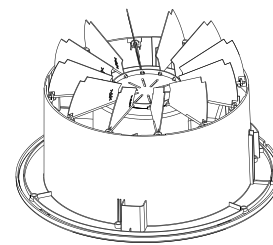

272mm

EXHAUST
FANS

FEATURES

- Ball bearing motor
- Quiet operation
- 1 metre flex and plug for DIY installation
- Draft stopper included



HEATING ACCESSORIES

ADVANTAGES OF ACCESSORIES

Martec® offers a range of accessory that is compatible to our heating and exhaust fans products. Check this out on our website [MARTECAUSTRALIA.COM.AU](https://www.martecaustralia.com.au)



BATHROOM HEATER LCD REMOTE CONTROL KIT

Making installation simpler and for installations where additional wiring to a switch is not possible.

ORDERING CODE

Martec® Bathroom Heater LCD Remote Control Kit MBHREM

FEATURES

- Easy to use LCD Screen
- Up to 30m range
- Multiple Frequencies when there are multiple units in the one house
- Designed to take up to 1900W
- For use with Martec 2 Heat or 4 Heat units as well as Linear and Aspire
- Full or half heat function on 4 heat models only
- Includes 9 Volt Battery



LEDUCATION



COLOUR TEMPERATURES

Colour temperature refers to the appearance of light provided by a light bulb. Different bulbs emit different colour temperatures. Colour temperature is expressed in Kelvins. The look and feel of a space can be greatly affected by colour temperature. Therefore, it is important to choose the right colour temperature based on the mood you want to create.

Based on the Kelvin numbered scale, the higher the colour temperature, the cooler, more energising light will be. A lower colour temperature will produce a warmer, more relaxing glow.

There are three basic choices of light bulbs in regard to colour temperature; 3000K (Warm White), 4000K (Cool White) and 5000K (Daylight)



IP RATING

IP stands for Ingress Protection. It is a way of rating how well protected the device is from things that can get into it. The first number rating solid objects and dust from 1 to 6. The second figure is the water protection rating. The range is from 1 for slow dripping water from above up to 8 for a device that can be submerged.


SOLIDS

- | | | |
|----------|--|--|
| 1 | Protected against a solid object greater than 50mm such as a hand. | |
| 2 | Protected against a solid object greater than 12.5mm such as a finger. | |
| 3 | Protected against a solid object greater than 2.5mm such as a screwdriver. | |
| 4 | Protected against a solid object greater than 1mm such as a wire. | |
| 5 | Dust protected. Limited ingress of dust permitted. Will not interfere with operation of the equipment. 2 to 8 hours. | |
| 6 | Dust Tight. No ingress of dust. 2 to 8 hours. | |

WATER

- | | | |
|----------|--|--|
| 1 | Protected against vertically falling drops of water. Limited ingress permitted. | |
| 2 | Protected against vertically falling drops of water with enclosure tilted up to 15 degrees from the vertical. Limited ingress permitted. | |
| 3 | Protected against sprays of water up to 60 degrees from the vertical. Limited ingress permitted for 3 minutes. | |
| 4 | Protected against water splashes from all directions. Limited ingress permitted. | |
| 5 | Protected against jets of water. Limited ingress permitted. | |
| 6 | Water from heavy seas or water projected in powerful jets shall not enter the enclosure in harmful quantities. | |
| 7 | Protected against vertically falling drops of water. Protection against the effects of immersion in water between 15cm and 1m for 30 minutes | |
| 8 | Protection against the effects of immersion in water under pressure for long periods. | |

CEILING FAN SIZE GUIDE

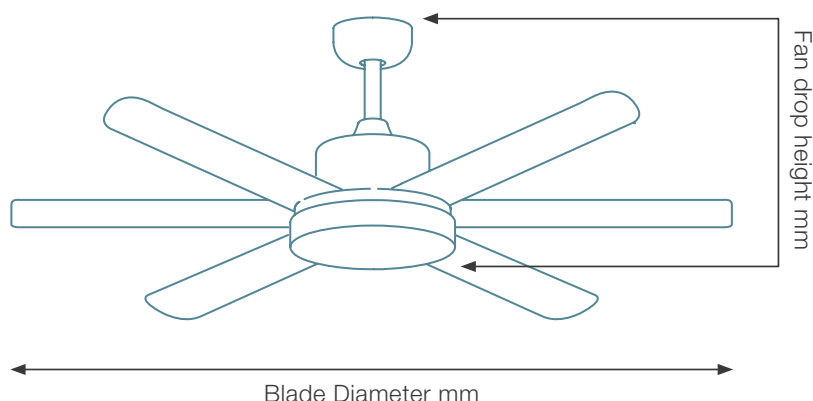

CEILING FAN SIZE RECOMMENDATIONS (GUIDE ONLY)

Room Dimensions Suggested Ceiling Fan Size

- Up to 12 square metres (3.5m x3.5m small bedroom) 1067mm (42")
- Up to 18 square metres (4m x4.5m medium bedroom small living area)
- Up to 30 square metres (5m x6m large bedroom, large living area) 1300mm (52")
- Up to 40 square metres (6.5m x6.5m rumpus room, large living area)

WARRANTY GUIDE



Ceiling Fans (Martec® & Four Seasons)

3 Year In-home + additional 3 Years
on the motor only



Remote Control Kits

1 Year In Home Warranty



Bathroom Heaters & Exhaust Fans

2 Year In-Home Warranty



Accessories

1 Year Replacement Warranty



Lighting

2 Year Replacement Warranty



Accessories

1 Year Replacement Warranty

Please refer to website for warranty terms and conditions.
www.martecaustralia.com.au/warranty-statement/

PRODUCT INDEX

COOLING

| Model No. | Page No. | Model No. | Page No. | Model No. | Page No. | Model No. | Page No. |
|-------------|----------|-----------|--------------------|------------|-----------|------------|----------|
| CFA124 | 57 | FST1434S | 59 | MDRD36M | 21,23 | MMF133MMR | 19 |
| CFA124C | 57 | FST1434W | 59 | MDRD36MT | 11,19 | MMF133OWR | 19 |
| CFS124 | 57 | MAF168BR | 23 | MDRD36N | 17 | MMF133WWR | 19 |
| CFS124C | 57 | MAF168MR | 23 | MDRD36N | 21,23 | MNF1433MMR | 11 |
| CFW124 | 57 | MAF168WR | 23 | MDRD36OT | 11,19 | MNF1433OWR | 11 |
| CFW124C | 57 | MAF180B | 21 | MDRD36TS | 13 | MNF1433WWR | 11 |
| CFW124CR | 57 | MAF180M | 21 | MDRD36W | 21,23, 27 | MNF143MMR | 11 |
| DLDC1343BR | 27 | MAF180W | 21 | MDRD36WS | 13 | MNF143OWR | 11 |
| DLDC1343WR | 27 | MAF210B | 21 | MDRD36WS | 17 | MNF143WWR | 11 |
| DLDC134BR | 27 | MAF210M | 21 | MDRD36WST | 11,19 | MOF134OB | 53 |
| DLDC134WR | 27 | MAF210W | 21 | MDRD72B | 27 | MOLKOB | 53 |
| DLS1043W | 49 | MAFMBR | 21 | MDRD72M | 17 | MPAPP | 31-63 |
| DLS1044W | 49 | MAFML3BR | 21 | MDRD72M | 21,23 | MPF120WH | 55 |
| DLS104W | 49 | MAFML3MR | 21 | MDRD72MT | 11,19 | MPF130WH | 55 |
| DLS1343B | 47 | MAFML3WR | 21 | MDRD72N | 17 | MPF140WH | 55 |
| DLS1343M | 47 | MAFMNR | 21 | MDRD72N | 21,23 | MPF3042SS | 55 |
| DLS1343W | 47 | MAFMWR | 21 | MDRD72OT | 11,19 | MPF3043SS | 55 |
| DLS1344B | 47 | MCF1333M | 39 | MDRD72TS | 13 | MPF3044SS | 55 |
| DLS1344M | 47 | MCF1333W | 39 | MDRD72W | 21,23,27 | MPF3162SS | 55 |
| DLS1344W | 47 | MCF133M | 39 | MDRD72WS | 13 | MPF3163SS | 55 |
| DLS134B | 47 | MCF133W | 39 | MDRD72WS | 17 | MPF3164SS | 55 |
| DLS134M | 47 | MCF1433M | 39 | MDRD72WST | 11,19 | MPLCDS | 31-62 |
| DLS134W | 47 | MCF1433W | 39 | MEF1333BB | 31 | MPREMS | 31-62 |
| DREPO36BN | 55 | MCF143M | 39 | MEF1333MB | 31 | MRF1343W | 43 |
| DREPO36W | 55 | MCF143W | 39 | MEF1333MM | 31 | MSF1333BR | 17 |
| DREPO72BN | 55 | MDF1243M | 41 | MEF1333OM | 31 | MSF1333MR | 17 |
| DREPO72W | 55 | MDF1243W | 41 | MEF1333WW | 31 | MSF1333WR | 17 |
| DRP36SS | 55 | MDF124M | 41 | MEF133BB | 31 | MSF133BR | 17 |
| DRP72SS | 55 | MDF124W | 41 | MEF133MB | 31 | MSF133MR | 17 |
| DRZ36TS | 15 | MDF1343M | 41 | MEF133MM | 31 | MSF133WR | 17 |
| DRZ36WS | 15 | MDF1343W | 41 | MEF133OM | 31 | MTF1333TS | 35 |
| DRZ72TS | 15 | MDF134M | 41 | MEF133WW | 31 | MTF1333WS | 35 |
| DRZ72WS | 15 | MDF134W | 41 | MFF1333TS | 37 | MTF133TS | 35 |
| FSIREM | 57,63 | MDRA36A | 57 | MFF1333WS | 37 | MTF133WS | 35 |
| FSL1243M | 51 | MDRA36B | 47,49 | MFF133TS | 37 | MWF1333TSR | 13 |
| FSL1243W | 51 | MDRA36M | 31, 39-51 | MFF133WS | 37 | MWF1333WSR | 13 |
| FSL1243WR | 51 | MDRA36N | 31,57,59 | MGF1533OT | 33 | MWF133TSR | 13 |
| FSL1244M | 51 | MDRA36O | 31,33 | MGF1533TS | 33 | MWF133WSR | 13 |
| FSL1244W | 51 | MDRA36O | 53 | MGF1533WS | 33 | MWF1633TSR | 13 |
| FSL1244WR | 51 | MDRA36TS | 33,35 | MGF153OT | 33 | MWF1633WSR | 13 |
| FSL124M | 51 | MDRA36W | 43,47,49,51,57,59 | MGF153TS | 33 | MWF163TSR | 13 |
| FSL124W | 51 | MDRA36WS | 31,33,35, 39,41,45 | MGF153WS | 33 | MWF163WSR | 13 |
| FSLCA | 57 | MDRA72A | 57 | MHF134OB | 53 | MZF134TSR | 15 |
| FSLCS | 57 | MDRA72B | 47,49 | MHLKOB | 53 | MZF134WSR | 15 |
| FSLCW | 57,59 | MDRA72M | 31, 39-51 | MLF1443W | 45 | MZF18TS | 15 |
| FSLDC1243MR | 25 | MDRA72N | 31,57,59 | MLF144MIP | 45 | MZF18WS | 15 |
| FSLDC1243WR | 25 | MDRA72O | 31,33 | MLF144W | 45 | PLKBN | 55 |
| FSLDC124MR | 25 | MDRA72O | 53 | MLF144WIP | 45 | PLKSS | 55 |
| FSLDC124WR | 25 | MDRA72TS | 33,35 | MMF1333MBR | 19 | PLKWH | 55 |
| FST1234S | 59 | MDRA72W | 43,47,49,51,57,59 | MMF1333MMR | 19 | | |
| FST1234W | 59 | MDRA72WS | 31,33,35,39,41,45 | MMF1333OWR | 19 | | |
| FST1334S | 59 | MDRD36B | 27 | MMF1333WWR | 19 | | |
| FST1334W | 59 | MDRD36M | 17 | MMF133MBR | 19 | | |

LIGHTING

| Model No. | Page No. | Model No. | Page No. |
|---------------|----------|-------------|----------|
| LEP456401230W | 103 | TLBD34510WD | 73 |
| MLBF12345W | 82 | TLDB34620 | 101 |
| MLBF60345W | 82 | TLDB34640 | 101 |
| MLC034515MD | 79 | TLDB34640S | 101 |
| MLC034515WD | 79 | TLDD34523WD | 71 |
| MLC034524MD | 79 | TLDE34640 | 101 |
| MLC034524WD | 79 | TLDE34640S | 101 |
| MLC034535MD | 79 | TLEEC360 | 99 |
| MLC034535WD | 79 | TLEESC360 | 99 |
| ML0034512 | 76 | TLE034515WD | 81 |
| ML0034518 | 76 | TLE034518WD | 81 |
| ML0034524 | 76 | TLE034528WD | 81 |
| ML0034528 | 76 | TLEREC | 99 |
| MLSA503MS | 93 | TLPD34510WD | 72 |
| MLXC034610 | 95 | TLSE23W | 100 |
| MLXC034615 | 95 | TLSE23WS | 100 |
| MLXCR34610 | 95 | TLTD34510MD | 74 |
| MLXCR34615 | 95 | TLTD34510WD | 74 |
| MLXD3451M | 85 | TLUD34510WD | 70 |
| MLXD3451MS | 85 | TLUP140W | 70 |
| MLXD3451W | 85 | TLWB34618 | 102 |
| MLXD3451WS | 85 | TLWB34639 | 102 |
| MLXD3452M | 85 | TLWB34639S | 102 |
| MLXD3452MS | 85 | TLWE34639 | 102 |
| MLXD3452W | 85 | TLWE34639S | 102 |
| MLXD3452WS | 85 | | |
| MLXF3451M | 87 | | |
| MLXF3451MS | 87 | | |
| MLXF3451W | 87 | | |
| MLXF3451WS | 87 | | |
| MLXF3452M | 87 | | |
| MLXF3452MS | 87 | | |
| MLXF3452W | 87 | | |
| MLXF3452WS | 87 | | |
| MLXG345100M | 91 | | |
| MLXG34510M | 91 | | |
| MLXG34520M | 91 | | |
| MLXG34520MS | 91 | | |
| MLXG34530M | 91 | | |
| MLXG34550M | 91 | | |
| MLXP34520MS | 92 | | |
| MLXR3451M | 89 | | |
| MLXR3451MS | 89 | | |
| MLXR3452M | 89 | | |
| MLXR3452MS | 89 | | |
| MLXS34510M | 96 | | |
| MLXS34510MS | 96 | | |
| MTD350VAP | 97 | | |
| MTD350VAR | 97 | | |
| TLAD34510WD | 69 | | |
| TLAG34510WD | 69 | | |
| TLAM34510WD | 69 | | |
| TLBD34510MD | 73 | | |

HEATING & EXHAUST FANS

| Model No. | Page No. |
|-----------|-----------------|
| MBGU306 | 108,109,114,115 |
| MBGU506 | 108,109,114,115 |
| MBHA800W | 111 |
| MBHC1LS | 119 |
| MBHC1LW | 119 |
| MBHC2LS | 120 |
| MBHC2LW | 120 |
| MBHC4LS | 121 |
| MBHC4LW | 121 |
| MBHF2LW | 117 |
| MBHF4LW | 118 |
| MBHL1000S | 108 |
| MBHL1000W | 108 |
| MBHM1000S | 109 |
| MBHM1000W | 109 |
| MBHN2LW | 112 |
| MBHN4LW | 113 |
| MBHP2LS | 114 |
| MBHP2LW | 114 |
| MBHP4LS | 115 |
| MBHP4LW | 115 |
| MBHREM | 131 |
| MBHU1LW | 116 |
| MBHV2000W | 110 |
| MRL1000W | 108,109 |
| MRL275W | 120-121 |
| MRL3K8W | 120, 121 |
| MRL400W | 111 |
| MXFC20W | 128 |
| MXFC25W | 128 |
| MXFFR25W | 124 |
| MXFFR30W | 124 |
| MXFFS25W | 125 |
| MXFFS30W | 125 |
| MXFJ25W | 129 |
| MXFJ30W | 129 |
| MXFLFR25W | 124 |
| MXFLFR30W | 124 |
| MXFLFS25W | 125 |
| MXFLFS30W | 125 |
| MXFSR20W | 126 |
| MXFSR25W | 126 |
| MXFSS20W | 127 |
| MXFSS25W | 127 |

WE DO MORE THAN YOU THINK...

Whether it is ceiling fans, LED lighting, bathroom heaters or exhaust fans. Martec® will always have the highest quality, best in class and competitively priced solutions to suit every lifestyle.

CONTACT

MONDAY TO FRIDAY



Warehouse hours: 7:30am – 3:30pm



Office hours: 8:00am – 4:00pm



(02) 8778 7500



sales@martec ltd.com.au



www.martecaustralia.com.au





MARTEC®
Cooling



MARTEC®
Heating



MARTEC®
Lighting

Martec® is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. Air movements figures quoted are guide only. All measurements are in millimetres unless otherwise stated.

For In Home Warranty, please visit website for details <https://www.martecaustralia.com.au/warranty-statement/>

The right is reserved to change specifications without prior notification or public announcement. All goods supplied by the company are supplied subject to the company's General Conditions of Sale, a copy of which is available on request.



