



MARTEC[®]

Life, enhanced.

Product Catalogue
2024



Ken Dick
General Manager
Martec Pty Ltd

Martec Australia is the country's premier supplier of ceiling fans, bathroom heaters, bathroom exhausts, and residential LED lighting products. As a privately owned business headquartered in Ingleburn, NSW, we pride ourselves on our people-focused approach and unwavering commitment to delivering exceptional customer service.

With a combined industry experience of over 100 years, our team is dedicated to understanding the intricate needs of our customers. We excel in processing, packing, and delivering customer orders, consistently exceeding industry standard lead-times.

Renowned for our quality, reliable products, we offer competitive pricing tailored to our target markets. Our sales professionals stationed in each state are backed by top-notch internal customer service, warehouse, and product marketing teams, ensuring that we meet and exceed customer expectations.

Martec Australia leads the industry in providing the products and services our customers demand, setting the standard for excellence in the market.



Enhance
your living
experience
with Martec®

OUR VALUES

Motivate
Accountability
Respect
Teamwork
Excellence
Challenge

OUR HISTORY & TIMELINES

65 years of trading

An integral part of Australian business since the acquisition in 2007

PRIOR

50 years of strong brand presence in the market

Offering ceiling fan, lighting and electrical appliances

Operated from Melbourne VIC



2007

Martec started at Kingsgrove NSW with 6 staff members

Introduction of Lifestyle ceiling fan



2010

Relocated our office and warehouse to larger facilities - 1100m² at Moorebank, NSW

2008

For the first time in Martec history we introduce a 3-in-1 bathroom heater - Contour



We also introduced our very first square ceiling fan - Quadrant



2011

Introduction of LED Lighting range

Released first Martec product catalogue

Creation of tagline Innovation | Durability | Quality



Innovation | Durability | Quality

2013

Moved office and warehouse facilities to an even bigger location - **1800m²** at York Road, Ingleburn NSW

Introduced the **Linear (3-in-1) bathroom heater**



2016

Streamline ERP system (Exo)

2021

Life, enhanced.[®] logo tagline introduced



2023

Introduction of **90 Smart DC ceiling fans**



Packaging rebrand



2015

Due to the **ever-growing business**, Martec **relocated** its office and warehouse facilities for the **fourth time**. Our new location at Austool Place, Ingleburn NSW is a huge **4000m²**



2020

Introduction of **40 new ceiling fan** products

Introduction of **60 new lighting** products

The warehouse upgraded its management system

Packaging rebrand underway

before



after



2022

Introduction of **Smart Products** ie. Sentinel and Avoca



LIFE ENHANCED[®]





Enhance your living experience with Martec®

After more than six decades, Martec® has become one of Australia's leading providers of cooling lighting, heating and exhaust products. Our focus has always been, and continues to be, on our customers and the quality of experience they enjoy when using our products and services.

Our relentless dedication to continuing development, puts Martec® at the forefront of innovation and design. With the latest technology, Martec® now offers an exciting and comprehensive range of best in class, energy efficient and competitively priced products, and solutions to suit every lifestyle.


Martec® ceiling fans are aesthetically designed and come in various colours to suit your home décor and any application. Our optional accessories enable you to install the ceiling fans at the right height so you can enjoy the cool breeze. All our ceiling fans come with summer/winter reverse mode which cool your home in summer and keep warm in winter to provide a comfortable living experience for you and your family all year round.

Martec® bathroom heaters and exhaust fans are designed to suit all bathroom and laundry sizes. They are available in different sizes, shapes and colour with built in thermal stopper for safety. With different IPX (ingress protection) and low decibel ratings. Martec® has a solution to complement any design scheme and environment in your home.

Martec® lighting offers an extensive range of LED products that are energy efficient and low in maintenance cost. Our lighting products are tricolour (switchable colour temperature) between 3000K to 5000K and with dimming options available. Our exterior lighting comes with different IP ratings and built-in motion sensor which provide security and safety in all outdoor applications and your home surroundings.

Martec® offer solutions for convenience, comfort, security and energy savings to enhance your lifestyle, and our products suit any retrofit and new built installation and application. As the business grows, our investment in the R&D and product teams expands, ensuring the transformation of our values into unique and dynamic outcomes that are second to none.


OUR BRANDS & PRODUCTS

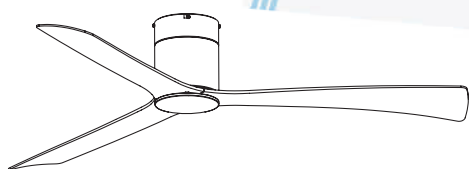

Martec® Cooling offers a comprehensive selection of ceiling fans and accessories tailored to meet diverse cooling needs and enhance any space.

Our Smart DC ceiling fans feature a variety of colours and sizes, alongside advanced features such as 6-stage changeable colour temperature and variable dimming for models with LED lights. Equipped with WiFi remote controls boasting 8 speed settings, including unique comfort sleep and breeze modes, these fans ensure optimal comfort throughout the night.



Martec® ceiling fans, whether AC or DC, are renowned for their energy efficiency and whisper-quiet operation, available in different colours and sizes with adjustable colour temperature and 3-step dimming options for LED light-equipped models. With an array of accessories including lights, downrods, and remote controls featuring timers, Martec® Cooling provides solutions to suit every lifestyle, delivering both functionality and style to any space.



Martec® Lighting provides a comprehensive selection of LED products encompassing downlights, surface mounted fittings, and exterior lighting solutions.

With a focus on versatility and functionality, our downlights and surface mounted fixtures offer switchable colour temperature options and dimming capabilities, compatible with Martec® dimmers for customizable ambiance.

Our exterior lighting range boasts varying ingress protection ratings and includes built-in motion sensor options, ensuring security and safety in diverse outdoor settings. Whether for smaller-scale projects or larger installations, Martec® Lighting accommodates budgets and specifications, delivering quality illumination solutions tailored to individual needs.



Martec® Heating presents an expansive collection of bathroom heaters and accessories tailored to accommodate various bathroom sizes and applications. Our diverse range includes everything from single heat lamp units to sleekly designed 3-in-1 heaters, offering instant heat solutions configurable with 1, 2, or 4 heat lamps, as well as tricolour LED lights.


With different IPX ratings and colour finishes available, our heaters seamlessly complement any design scheme and environment within your home, ensuring both style and functionality. Whether seeking simple warmth or multi-functional heating options, Martec® Heating provides versatile solutions to enhance your bathroom experience.

Martec® Exhaust delivers a versatile array of exhaust fans designed to accommodate bathrooms of any size and various other area applications. Our exhaust fans boast diverse features including different sizes, IPX ratings, shapes, and tricolour LED light options, ensuring suitability for a wide range of environments.

Powered by high-performance ball bearing motors and equipped with superior blade designs, our exhaust fans offer maximum air extraction efficiency while operating quietly. Whether you seek optimal ventilation for your bathroom or other spaces, Martec® Exhaust provides reliable solutions that combine performance, durability, and whisper-quiet operation.


CONTENTS

COOLING 12

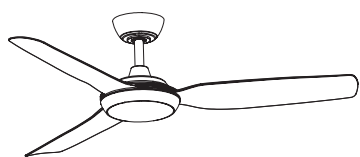


NEW
SMART DC
CEILING FANS

20




DC CEILING FANS

72

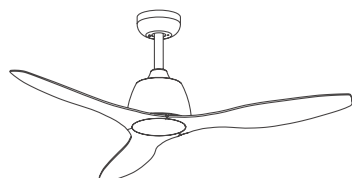

AC CEILING FANS


86



CEILING FANS
ACCESSORIES


102

HEATING & EXHAUSTS 112



BATHROOM
HEATERS

114




EXHAUST
FANS

138



HEATING
ACCESSORIES


146



SCAN TO VIEW THIS CATALOGUE ONLINE
OR DOWNLOAD A COPY!

LIGHTING 150

RESOURCES 236



DOWNLIGHTS

152



GUIDES

- CEILING FAN SIZE & APPLICATION GUIDE 14
- BATHROOM HEATER & EXHAUST FAN GUIDE 145
- LIGHTING SENSOR APPLICATION GUIDE 186



SURFACE MOUNTED LIGHTING

- OYSTER LIGHTS 170
- BATTENS 178



LEDUCATION

236



NEW


EXTERIOR LIGHTING

- WALL LIGHTS 188
- DECORATIVE LIGHTS 198
- STEP LIGHTS 204
- SPOT LIGHTS 212
- SECURITY LIGHTS 218
- FLOODLIGHTS & BUNKER 228




STANDARDS

- IC RATING 237
- IK RATING 238
- IP RATING 239
- IPX RATING 239




EMERGENCY LIGHTING

234



PRODUCT INDEX

240



LIGHTING ACCESSORIES

- DIMMERS 235
- LAMPS 235



WARRANTY

246

UNDERSTANDING OUR CATALOGUE

1 VIPER DC 3 Best-in-class airflow




- 3** **6 YEAR** Warranty
- Wi-Fi
 - Indoor Cover Outdoor Use
 - Summer/Winter Reverse Function
 - Tropical Rated
 - CCT
 - Variable Dimming

4 FEATURES


- Brushless quiet and efficient 36W DC motor
- WiFi connectivity and operate via Smart Life application
- Low ceiling and slimline designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- All ABS body, canopy and blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 18W LED with variable dimming (light model only)
- Variable 5 stage colour temperature between 2700K to 6000K (light model only)

5 DIMENSIONS

FAN ONLY

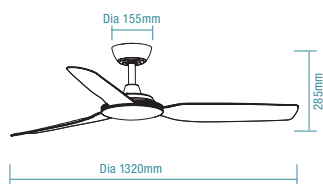

FAN LED LIGHT

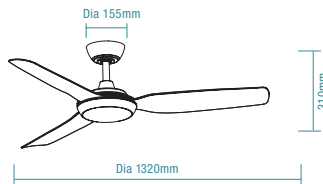

18 // martecaustralia.com.au

For more product information please visit our website.

6 SPECIFICATIONS

	Fan Only	
Ordering Code	MVDC133W	MVDC133M
Colour	Matt White	Matt Black
Power Wattage	36W	
Blade Diameter	1320mm (52")	
Air Movement m ³ /hr		
Speed 6 (Highest)	17,640m ³ /hr	
Speed 5	14,200m ³ /hr	
Speed 4	13,600m ³ /hr	
Speed 3	12,800m ³ /hr	
Speed 2	11,400m ³ /hr	
Speed 1 (Lowest)	8,500m ³ /hr	
Blade Pitch	14°	
Hangsure Canopy	15"	
Lighting Wattage / Type	-	
Colour Temperature	-	
Lumens Output	-	
Rated Lifetime	-	
Dimmable	-	
Wall Control / Remote Control	8 speed remote control and timer	

7



MVDC133W
Matt White


MVDC133M
Matt Black



MVDC1333W
Matt White

MVDC1333M
Matt Black

8

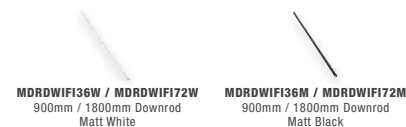

MDRDWIFI36W / MDRDWIFI72W
900mm / 1800mm Downrod
Matt White

MDRDWIFI36M / MDRDWIFI72M
900mm / 1800mm Downrod
Matt Black

For more product information please visit our website.

1 PRODUCT NAME

3 WARRANTY & STANDARDS

5 PRODUCT DIMENSIONS

7 COLOUR & VARIANTS

2 PRODUCT IMAGE

4 PRODUCT FEATURES

6 ORDERING CODES & SPECIFICATIONS

8 ACCESSORIES

Fan LED Light	
MVDC1333W	MVDC1333M
Matt White	Matt Black
36W	
1320mm (52")	
17,640m³/hr	
14,200m³/hr	
13,600m³/hr	
12,800m³/hr	
11,400m³/hr	
8,500m³/hr	
14"	
15"	
18W LED	
2700K / 3000K / 4000K / 5000K / 6000K	
Up to 2120lm	
35,000 hours @ Ta25°C	
Variable dimming	
8 speed remote control and timer	

CONTENTS PAGE

CONTENTS	
COOLING 12	HEATING & EXHAUSTS 112
NEW SMART DC CEILING FANS 20	BATHROOM HEATERS 114
DC CEILING FANS 72	EXHAUST FANS 138
AC CEILING FANS 86	HEATING ACCESSORIES 146
CEILING FANS ACCESSORIES 102	
SCAN TO VIEW THIS CATALOGUE ONLINE OR DOWNLOAD A COPY!	
LIGHTING 150	RESOURCES 236
DOWNLIGHTS 152	GUIDES - CEILING FAN SIZE & APPLICATION GUIDE 14 - BATHROOM HEATER & EXHAUST FAN GUIDE 145 - LIGHTING SENSOR APPLICATION GUIDE 156
SURFACE MOUNTED LIGHTING - OYSTER LIGHTS 170 - BATTERS 176	EDUCATION 236
NEW EXTERIOR LIGHTING - WALL LIGHTS 188 - DECORATIVE LIGHTS 189 - STEP LIGHTS 204 - SPOT LIGHTS 212 - SECURITY LIGHTS 213 - FLOODLIGHTS & BEANER 226	STANDARDS - IC RATING 237 - IK RATING 238 - IP RATING 239 - LPK RATING 239
EMERGENCY LIGHTING 234	PRODUCT INDEX 240
LIGHTING ACCESSORIES - DIMMERS 235 - LAMPS 236	WARRANTY 246

SUPPLIED WITH



WiFi Remote Control and Timer

SUPPLIED WITH



WiFi Remote Control, Light and Timer

martecaustralia.com.au // 19

The contents page is designed to help you navigate through the catalogue for each of our categories. Each category (ie Cooling etc.) are broken down into subcategories, which will take you directly to that section and show you all the options that Martec® has to offer.

PRODUCT INDEX

PRODUCT INDEX					
COOLING					
Model No.	Page No.	Model No.	Page No.	Model No.	Page No.
DC020W12	12	MDR06369	83	MDR06955	42, 107
DC013420	84,85	MDR06369	83	MDR06956	41, 107
DC013424	84,85	MDR06369	83	MDR06957	22, 23, 24, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013426	84,85	MDR06369	83	MDR06958	71, 107
DC013428	84,85	MDR06369	83	MDR06959	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013430	84,85	MDR06369	83	MDR06960	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013432	84,85	MDR06369	83	MDR06961	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013434	84,85	MDR06369	83	MDR06962	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013436	84,85	MDR06369	83	MDR06963	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013438	84,85	MDR06369	83	MDR06964	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013440	84,85	MDR06369	83	MDR06965	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013442	84,85	MDR06369	83	MDR06966	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013444	84,85	MDR06369	83	MDR06967	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013446	84,85	MDR06369	83	MDR06968	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013448	84,85	MDR06369	83	MDR06969	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013450	84,85	MDR06369	83	MDR06970	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013452	84,85	MDR06369	83	MDR06971	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013454	84,85	MDR06369	83	MDR06972	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013456	84,85	MDR06369	83	MDR06973	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013458	84,85	MDR06369	83	MDR06974	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013460	84,85	MDR06369	83	MDR06975	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013462	84,85	MDR06369	83	MDR06976	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013464	84,85	MDR06369	83	MDR06977	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013466	84,85	MDR06369	83	MDR06978	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013468	84,85	MDR06369	83	MDR06979	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013470	84,85	MDR06369	83	MDR06980	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013472	84,85	MDR06369	83	MDR06981	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013474	84,85	MDR06369	83	MDR06982	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013476	84,85	MDR06369	83	MDR06983	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013478	84,85	MDR06369	83	MDR06984	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013480	84,85	MDR06369	83	MDR06985	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013482	84,85	MDR06369	83	MDR06986	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013484	84,85	MDR06369	83	MDR06987	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013486	84,85	MDR06369	83	MDR06988	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013488	84,85	MDR06369	83	MDR06989	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013490	84,85	MDR06369	83	MDR06990	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013492	84,85	MDR06369	83	MDR06991	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013494	84,85	MDR06369	83	MDR06992	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013496	84,85	MDR06369	83	MDR06993	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013498	84,85	MDR06369	83	MDR06994	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013500	84,85	MDR06369	83	MDR06995	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013502	84,85	MDR06369	83	MDR06996	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013504	84,85	MDR06369	83	MDR06997	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013506	84,85	MDR06369	83	MDR06998	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013508	84,85	MDR06369	83	MDR06999	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013510	84,85	MDR06369	83	MDR07000	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013512	84,85	MDR06369	83	MDR07001	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013514	84,85	MDR06369	83	MDR07002	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013516	84,85	MDR06369	83	MDR07003	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013518	84,85	MDR06369	83	MDR07004	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013520	84,85	MDR06369	83	MDR07005	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013522	84,85	MDR06369	83	MDR07006	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013524	84,85	MDR06369	83	MDR07007	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013526	84,85	MDR06369	83	MDR07008	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013528	84,85	MDR06369	83	MDR07009	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013530	84,85	MDR06369	83	MDR07010	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013532	84,85	MDR06369	83	MDR07011	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013534	84,85	MDR06369	83	MDR07012	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013536	84,85	MDR06369	83	MDR07013	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013538	84,85	MDR06369	83	MDR07014	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013540	84,85	MDR06369	83	MDR07015	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013542	84,85	MDR06369	83	MDR07016	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013544	84,85	MDR06369	83	MDR07017	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013546	84,85	MDR06369	83	MDR07018	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013548	84,85	MDR06369	83	MDR07019	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013550	84,85	MDR06369	83	MDR07020	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013552	84,85	MDR06369	83	MDR07021	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013554	84,85	MDR06369	83	MDR07022	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013556	84,85	MDR06369	83	MDR07023	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013558	84,85	MDR06369	83	MDR07024	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013560	84,85	MDR06369	83	MDR07025	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013562	84,85	MDR06369	83	MDR07026	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013564	84,85	MDR06369	83	MDR07027	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013566	84,85	MDR06369	83	MDR07028	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013568	84,85	MDR06369	83	MDR07029	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013570	84,85	MDR06369	83	MDR07030	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013572	84,85	MDR06369	83	MDR07031	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013574	84,85	MDR06369	83	MDR07032	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013576	84,85	MDR06369	83	MDR07033	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013578	84,85	MDR06369	83	MDR07034	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013580	84,85	MDR06369	83	MDR07035	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013582	84,85	MDR06369	83	MDR07036	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013584	84,85	MDR06369	83	MDR07037	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013586	84,85	MDR06369	83	MDR07038	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013588	84,85	MDR06369	83	MDR07039	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013590	84,85	MDR06369	83	MDR07040	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013592	84,85	MDR06369	83	MDR07041	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013594	84,85	MDR06369	83	MDR07042	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013596	84,85	MDR06369	83	MDR07043	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013598	84,85	MDR06369	83	MDR07044	25, 27, 31, 32, 41, 42, 49, 51, 81, 82, 87, 99, 107
DC013600	84,85	MDR06369	83	MDR07045	25,

Cooling

Martec® Cooling offers a comprehensive selection of ceiling fans and accessories tailored to meet diverse cooling needs and enhance any space.

Our Smart DC ceiling fans feature a variety of colours and sizes, alongside advanced features such as 6-stage changeable colour temperature and variable dimming for models with LED lights. Equipped with WiFi remote controls boasting 8 speed settings, including unique comfort sleep and breeze modes, these fans ensure optimal comfort throughout the night.

Martec® ceiling fans, whether AC or DC, are renowned for their energy efficiency and whisper-quiet operation, available in different colours and sizes with adjustable colour temperature and 3-step dimming options for LED light-equipped models. With an array of accessories including lights, downrods, and remote controls featuring timers, Martec® Cooling provides solutions to suit every lifestyle, delivering both functionality and style to any space.

NEW
SMART DC
CEILING FANS **20**

DC CEILING FANS **72**

AC CEILING FANS **86**

CEILING FANS
ACCESSORIES **102**


CEILING FAN SIZE GUIDE




Study / Small Bedroom



Office / Medium Bedroom /
Small Living Room




Large Bedroom / Large Living Room /
Home Theatre




Rumpus Room / Large Living Room

ROOM SIZE / TYPE						
		Study / Small Bedroom	Office / Medium Bedroom / Small Living Room	Large Bedroom / Large Living Room / Home Theatre	Rumpus Room / Large Living Room	
		Up to 12m ² (3.5m x 3.5m)	Up to 18m ² (4m x 4.5m)	Up to 30m ² (5m x 6m)	Up to 40m ² (6.5m x 6m)	
Ceiling Fan Size		1067mm (42")	1220mm (48")	1320mm (52")	1420mm (56")	
NEW	Smart DC Ceiling Fan	Viper DC	✓	✓	✓	
	Elite DC	✓	✓			
	Avoca DC		✓	✓		
	Metro DC		✓	✓		
	Scorpion DC	✓	✓	✓		
	Riviera DC		✓	✓		
	Hampton DC		✓	✓		
	Genoa DC	✓	✓			
	Carrara DC	✓	✓	✓		
	Fresno DC		✓	✓		
	Daytona DC		✓	✓		
	Mallorca DC	✓	✓	✓		
	Norfolk DC	✓	✓			
	Norfolk Aero DC	Recommended for large combined living and dining areas. Alfresco and BBQ areas.				
Kingston DC	✓	✓				
DC Ceiling Fan	Newport	✓	✓	✓	✓	
	Wave	✓	✓	✓	✓	
	Albatross	Recommended for large combined living and dining areas. Alfresco and BBQ areas.				
	Albatross Mini	Recommended for large combined living and dining areas. Alfresco and BBQ areas.				
AC Ceiling Fan	Discovery II	✓	✓	✓	✓	
	Link	✓	✓			
	Lifestyle	✓	✓	✓		
	Razor	✓	✓			
	Precision	✓	✓	✓	✓	
	Governor	✓	✓	✓	✓	


APPLICATION GUIDE




Flat Level Surface Ceiling



Slope Ceiling up to 15°



Corrugated Ceiling

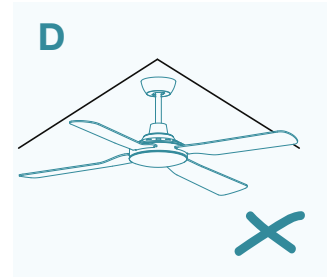

Apex Ceiling

Except for Carrara DC, Fresno DC, Metro DC & Metro ceiling fans. They must be installed on flat level surface.

ROOM SIZE / TYPE					
Ceiling Fan (DC / AC)	Indoor Use	Covered Outdoor*	Tropical Rated	Coastal Rated	
NEW Smart DC Ceiling Fan	Viper DC	✓	✓	All ABS	
	Elite DC	✓	✓		
	Avoca DC	✓	✓		
	Metro DC	✓	✓		
	Scorpion DC	✓	✓		
	Riviera DC	✓	✓**		
	Hampton DC	✓	✓		
	Genoa DC	✓	✓		
	Carrara DC	✓	✓		
	Fresno DC	✓	✓		
	Daytona DC	✓	✓	IP55	IP55
	Mallorca DC	✓	✓		
	Norfolk DC	✓	✓		
	Norfolk Aero DC	✓	✓		
	Kingston DC	✓	✓		
	DC Ceiling Fan	Newport	✓	✓	
Wave		✓	✓		
Albatross		✓	✓		
Albatross Mini		✓	✓		
AC Ceiling Fan	Discovery II	✓	✓	All ABS	
	Link	✓			
	Lifestyle	✓			
	Razor	✓			
	Precision	✓	✓	Stainless Steel***	Stainless Steel***
Governor	✓	✓			

*Covered outdoor means alfresco and BBQ area in a residential dwelling.

**Matt white and Matt black models only.

***Stainless steel model only.

REMOTE CONTROLS EXPLAINED

NEW

WIFI REMOTE CONTROL

(supplied with **ALL smart** DC ceiling fans see p.12-p.67)

Light on/off
Fan LED Light models only

Light Dimming (Lower)
Fan LED Light models only

Light Dimming (Higher)
Fan LED Light models only

Fan off only

Breeze Mode
Randomly rotates between speeds 1 & 6. Creating a natural breeze effect

Colour Temperature
Change between 2700K to 6000K
Fan LED Light models only

Timer
Turns the fan off in 1, 4 or 8 hours

Fan Speeds
6 - Highest
1 - Lowest

Summer/Winter Reverse Mode

Sleep Mode
Operates lower than speed 1


Fan only model

Operate via Smart Life App Compatible with Google Home & Alexa.

GET IT ON Google Play
Download on the App Store

REMOTE CONTROL

(supplied with **ALL non-smart** DC ceiling fans see p.52-p.65)

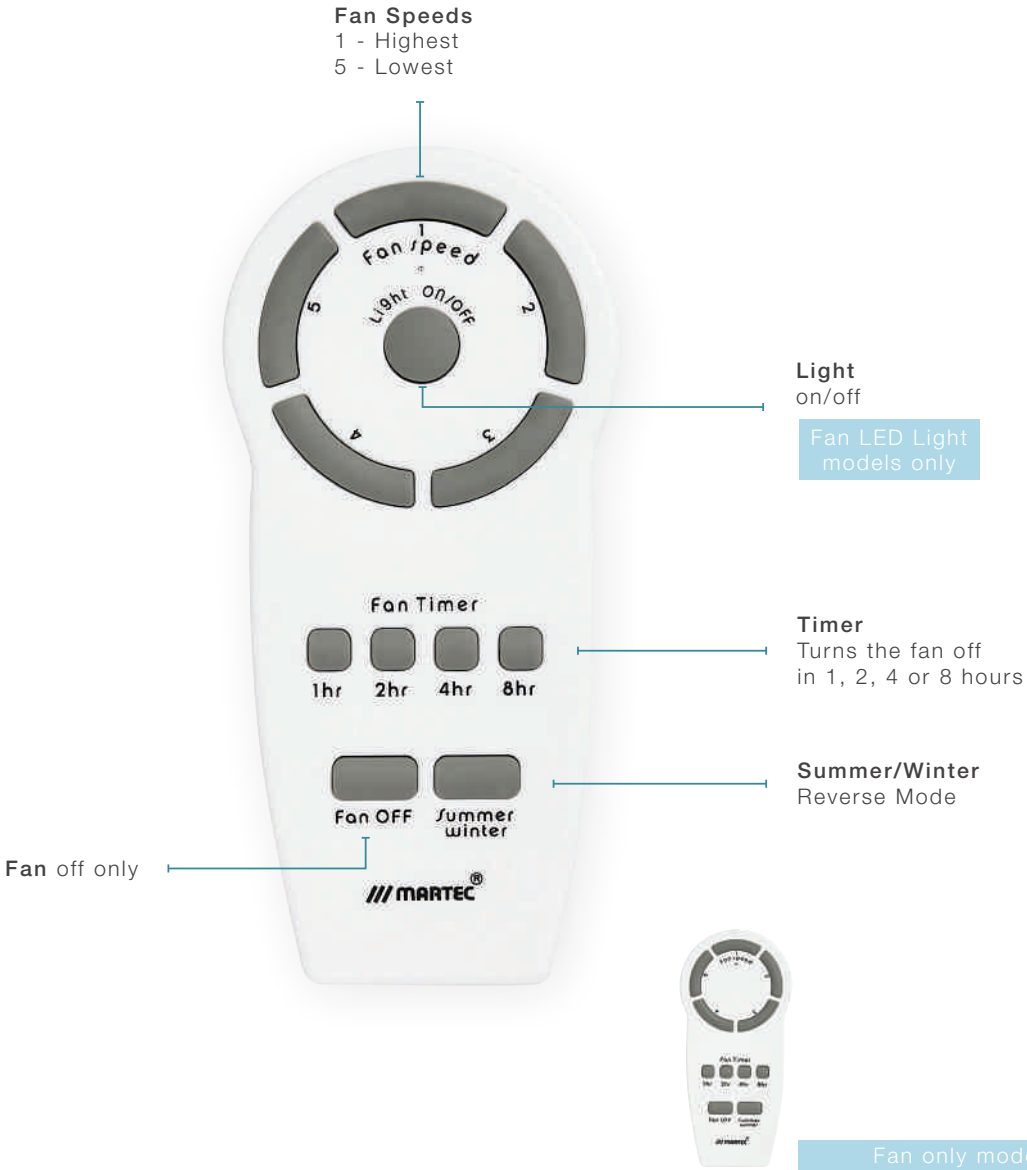



KEY FEATURES


(applies to **ALL smart** DC ceiling fans see p.12-p.67)

- WiFi Smart
- 6 stage CCT (2700K - 6000K)
- Variable dimming
- 8 speed settings (6 fan speed + sleep + breeze mode)
- Stronger mounting bracket
- Bigger rod (26.5mm vs 18mm standard)
- Magnetic screw cover
- Full setting memory
- RAL9016 Australian Ceiling White

Stronger mounting bracket

Bigger rod
(26.5mm)



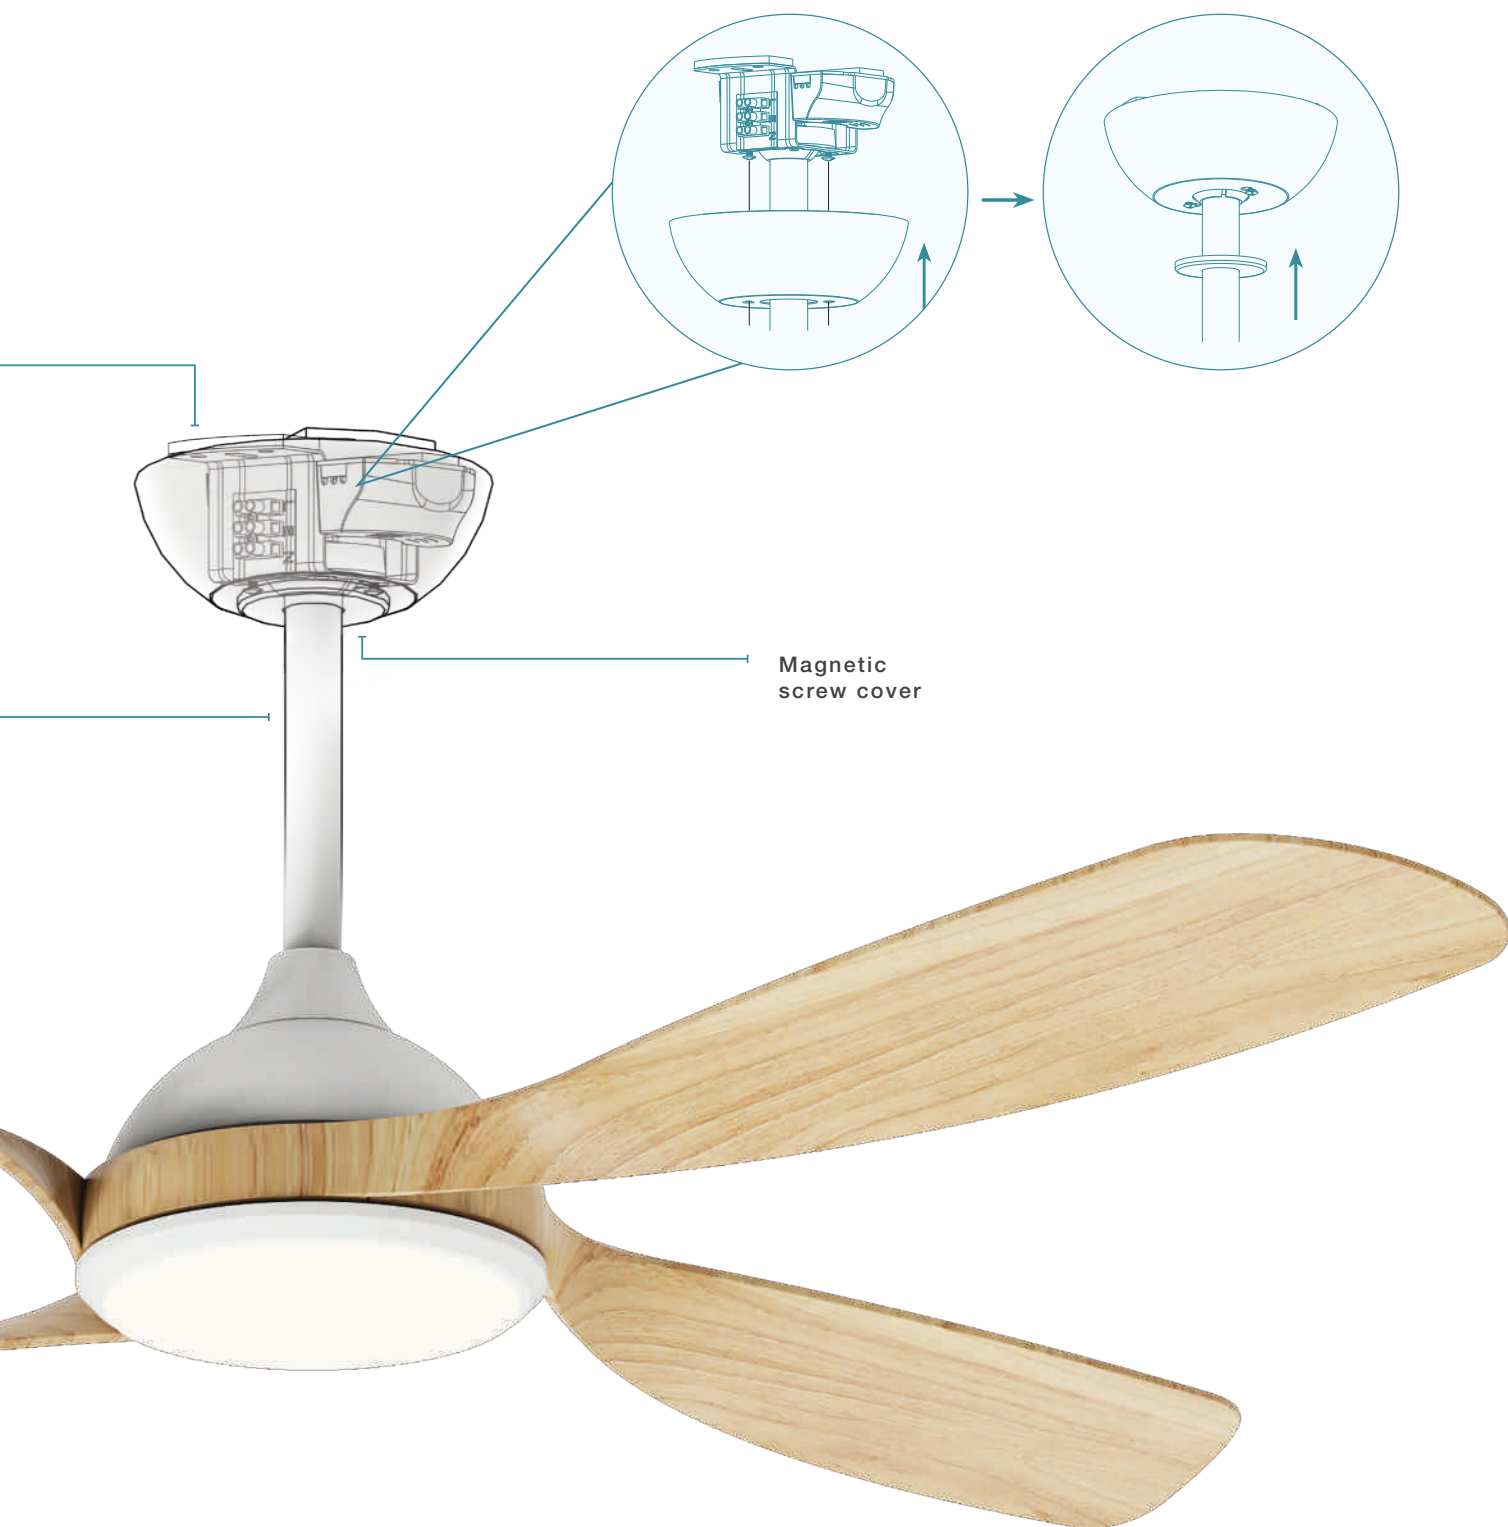

Magnetic
screw cover

“ Hey... turn
the fan on ”



NEW

SMART DC CEILING FANS

ADVANTAGES OF SMART DC MOTOR CEILING FANS

High Efficiency

DC motors on average consume less energy than conventional ceiling fan motors.

Speed Control

DC motor controllers provide up to 8 speed settings and an easy to use reverse function for summer and winter operation.

Light Weight

DC motors weigh less than conventional fan motors, resulting in a lighter product that is easier to install for electricians.

Quiet Operation

DC motors are very quiet when in operation, ideal for bedrooms.

Remote Control:

Smart DC Ceiling fans can be operated via a Smart DC remote control (supplied with unique comfort sleep and breeze mode + 6 other settings).

Viper DC 3.....	22
Viper DC 4.....	26
Elite DC.....	28
Avoca DC.....	32
Metro DC.....	36
Scorpion DC.....	40
Riviera DC.....	42
Hampton DC.....	46
Genoa DC.....	50
Carrara DC.....	52
Fresno DC.....	54
Daytona DC.....	56
Mallorca DC.....	58
Mallorca Mini DC.....	62
Norfolk DC.....	64
Norfolk Aero DC.....	68
Kingston DC.....	70





VIPER DC

Best-in-class airflow
1320mm (52")
Smart DC ceiling fan

VIPER DC 3

Best-in-class airflow

1220mm
(48") models
are coming in
AUGUST
2024.



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



Tropical
Rated



CCT




Variable
Dimming

FEATURES


- Brushless quiet and efficient 36W DC motor
- WiFi connectivity and operate via Smart Life application
- Low ceiling and slimline designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- All ABS body, canopy and blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 18W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)

DIMENSIONS

FAN ONLY

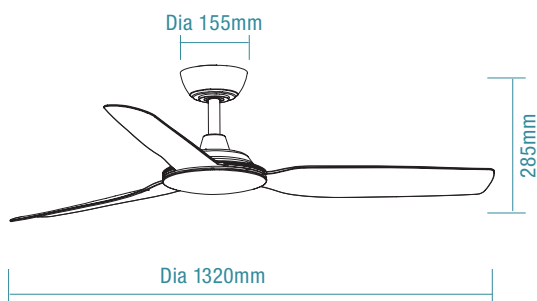

FAN LED LIGHT

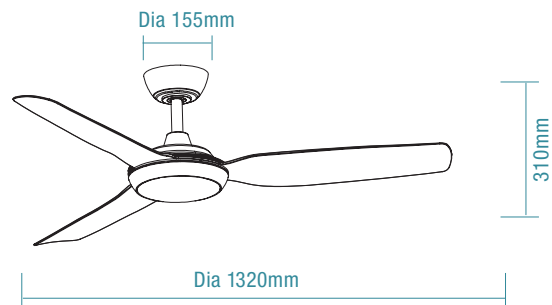

SPECIFICATIONS

	Fan Only		Fan LED Light	
Ordering Code	MVDC133W	MVDC133M	MVDC1333W	MVDC1333M
Colour	Matt White	Matt Black	Matt White	Matt Black
Power Wattage	36W		36W	
Voltage	220-240Va.c. 50Hz		220-240Va.c. 50Hz	
Blade Diameter	1320mm (52")		1320mm (52")	
Air Movement m³/hr				
Speed 6 (Highest)	17,640m ³ /hr		17,640m ³ /hr	
Speed 5	14,200m ³ /hr		14,200m ³ /hr	
Speed 4	13,600m ³ /hr		13,600m ³ /hr	
Speed 3	12,800m ³ /hr		12,800m ³ /hr	
Speed 2	11,400m ³ /hr		11,400m ³ /hr	
Speed 1 (Lowest)	8,500m ³ /hr		8,500m ³ /hr	
Blade Pitch	14°		14°	
Hangsure Canopy	Maximum 15°		Maximum 15°	
Lighting Wattage / Type	-		18W LED	
Colour Temperature	-		2700K - 6000K	
Lumens Output	-		Up to 2120lm	
Rated Lifetime	-		35,000 hours @ Ta25°C	
Dimmable	-		Variable dimming	
Wall Control / Remote Control	8 speed remote control and timer		8 speed remote control and timer	

COLOUR AND VARIANTS

FAN ONLY



MVDC133W
Matt White



MVDC133M
Matt Black

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MVDC1333W
Matt White



MVDC1333M
Matt Black

SUPPLIED WITH



WiFi Remote Control,
Light and Timer

ACCESSORIES



MDRDWIFI36W / MDRDWIFI72W
900mm / 1800mm Downrod
Matt White



MDRDWIFI36M / MDRDWIFI72M
900mm / 1800mm Downrod
Matt Black

VIPER DC 4

Best-in-class airflow



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



Tropical
Rated



CCT



Variable
Dimming

FEATURES

- Brushless quiet and efficient 36W DC motor
- WiFi connectivity and operate via Smart Life application
- Low ceiling and slimline designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- All ABS body, canopy and blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 18W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)

SPECIFICATIONS

	Fan Only		Fan LED Light	
Ordering Code	MVDC134W	MVDC134M	MVDC1343W	MVDC1343M
Colour	Matt White	Matt Black	Matt White	Matt Black
Power Wattage	36W		36W	
Voltage	220-240Va.c. 50Hz		220-240Va.c. 50Hz	
Blade Diameter	1320mm (52")		1320mm (52")	
Air Movement m³/hr				
Speed 6 (Highest)	17,640m ³ /hr		17,640m ³ /hr	
Speed 5	14,200m ³ /hr		14,200m ³ /hr	
Speed 4	13,600m ³ /hr		13,600m ³ /hr	
Speed 3	12,800m ³ /hr		12,800m ³ /hr	
Speed 2	11,400m ³ /hr		11,400m ³ /hr	
Speed 1 (Lowest)	8,500m ³ /hr		8,500m ³ /hr	
Blade Pitch	14°		14°	
Hangsure Canopy	Maximum 15"		Maximum 15"	
Lighting Wattage / Type	-		18W LED	
Colour Temperature	-		2700K - 6000K	
Lumens Output	-		Up to 2120lm	
Rated Lifetime	-		35,000 hours @ Ta25°C	
Dimmable	-		Variable dimming	
Wall Control / Remote Control	8 speed remote control and timer		8 speed remote control and timer	

COLOUR AND VARIANTS

FAN ONLY



MVDC134W
Matt White



MVDC134M
Matt Black

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MVDC1343W
Matt White



MVDC1343M
Matt Black

SUPPLIED WITH



WiFi Remote Control
and Timer

ACCESSORIES




MDRDWIFI36W / MDRDWIFI72W
900mm / 1800mm Downrod
Matt White




MDRDWIFI36M / MDRDWIFI72M
900mm / 1800mm Downrod
Matt Black

DIMENSIONS

FAN ONLY

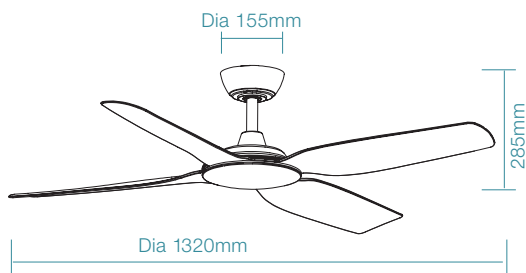

FAN LED LIGHT

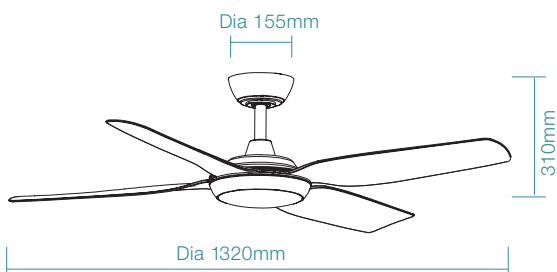



PHOTOGRAPHY
ARCHITECTURE



ELITE DC

Timeless design
1220mm (48")
Smart DC ceiling fan

ELITE DC

Timeless design

1320mm
(52") models
are coming in
AUGUST
2024.



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



CCT




Variable
Dimming

FEATURES


- Brushless quiet and efficient 36W DC motor
- WiFi connectivity and operate via Smart Life application
- Low ceiling and slimline designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- Steel body, canopy and ABS blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 18W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)

DIMENSIONS

FAN ONLY

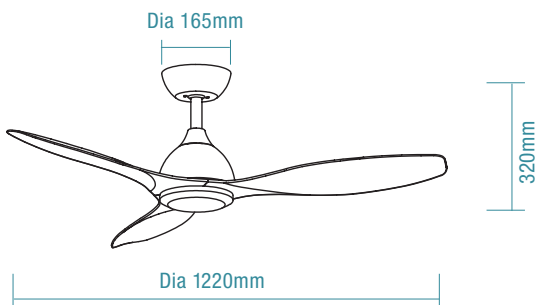

FAN LED LIGHT

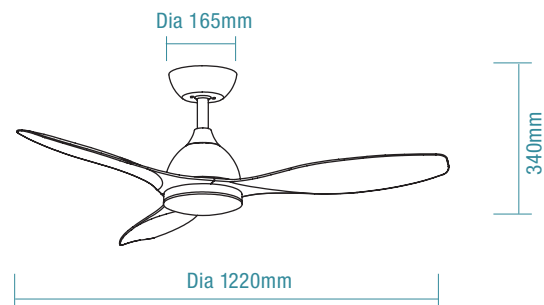

SPECIFICATIONS

	Fan Only			Fan LED Light		
Ordering Code	MEDC123W	MEDC123M	MEDC123MW	MEDC1233W	MEDC1233M	MEDC1233MW
Colour	Matt White	Matt Black	Matt Black / Walnut	Matt White	Matt Black	Matt Black / Walnut
Power Wattage	36W			36W		
Voltage	220-240Va.c. 50Hz			220-240Va.c. 50Hz		
Blade Diameter	1220mm (48")			1220mm (48")		
Air Movement m³/hr						
Speed 6 (Highest)	14,000m ³ /hr			14,000m ³ /hr		
Speed 5	11,200m ³ /hr			11,200m ³ /hr		
Speed 4	9,120m ³ /hr			9,120m ³ /hr		
Speed 3	7,750m ³ /hr			7,750m ³ /hr		
Speed 2	6,290m ³ /hr			6,290m ³ /hr		
Speed 1 (Lowest)	4,680m ³ /hr			4,680m ³ /hr		
Blade Pitch	10°			10°		
Hangsure Canopy	Maximum 10°			Maximum 10°		
Lighting Wattage / Type	-			18W LED		
Colour Temperature	-			2700K - 6000K		
Lumens Output	-			Up to 1950lm		
Rated Lifetime	-			30,000 hours @ Ta25°C		
Dimmable	-			Variable dimming		
Wall Control / Remote Control	8 speed remote control and timer			8 speed remote control and timer		

COLOUR AND VARIANTS

FAN ONLY



MEDC123W
Matt White



MEDC123M
Matt Black



MEDC123MW
Matt Black / Walnut

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MEDC1233W
Matt White



MEDC1233M
Matt Black



MEDC1233MW
Matt Black / Walnut

SUPPLIED WITH



WiFi Remote Control,
Light and Timer

ACCESSORIES



MDRDWIFI36W / MDRDWIFI72W
900mm / 1800mm Downrod
Matt White



MDRDWIFI36M / MDRDWIFI72M
900mm / 1800mm Downrod
Matt Black





AVOCA DC

Smart and Wi-Fi connectivity
1320mm (52") / 1220mm (48")
Smart DC ceiling fan

AVOCA DC

Smart and Wi-Fi connectivity



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



CCT




Variable
Dimming

FEATURES


- Brushless quiet and efficient 45W DC motor
- WiFi connectivity and operate via Smart Life application
- Low ceiling and slimline designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- Steel body, canopy and ABS blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 20W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)

DIMENSIONS

FAN ONLY

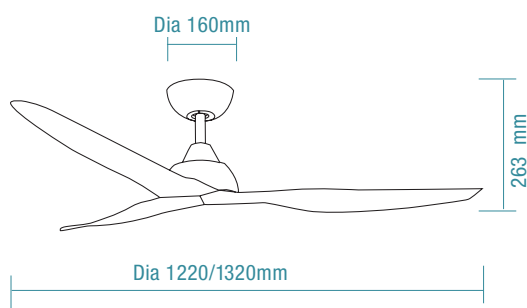

FAN LED LIGHT

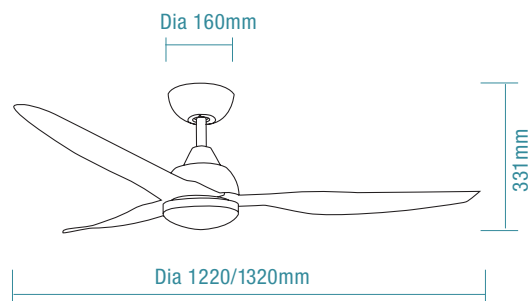

SPECIFICATIONS

	Fan Only						Fan LED Light					
Ordering Code	MADC123WWR	MADC123MMR	MADC123WOR	MADC133WWR	MADC133MMR	MADC133WOR	MADC1233WWR	MADC1233MMR	MADC1233WOR	MADC1333WWR	MADC1333MMR	MADC1333WOR
Colour	Matt White	Matt Black	Matt White / Oak	Matt White	Matt Black	Matt White / Oak	Matt White	Matt Black	Matt White / Oak	Matt White	Matt Black	Matt White / Oak
Power Wattage	45W						45W					
Voltage	220-240Va.c. 50Hz						220-240Va.c. 50Hz					
Blade Diameter	1220mm (48")			1320mm (52")			1220mm (48")			1320mm (52")		
Air Movement m ³ /hr												
Speed 6 (Highest)	10,530m ³ /hr						10,530m ³ /hr					
Speed 5	9,500m ³ /hr						9,500m ³ /hr					
Speed 4	8,100m ³ /hr						8,100m ³ /hr					
Speed 3	7,050m ³ /hr						7,050m ³ /hr					
Speed 2	4,800m ³ /hr						4,800m ³ /hr					
Speed 1 (Lowest)	2,800m ³ /hr						2,800m ³ /hr					
Blade Pitch	10°						10°					
Hangsare Canopy	Maximum 15°						Maximum 15°					
Lighting Wattage / Type	-						20W LED					
Colour Temperature	-						2700K - 6000K					
Lumens Output	-						Up to 2500lm					
Rated Lifetime	-						50,000 hours @ Ta25°C					
Dimmable	-						Variable dimming					
Wall Control / Remote Control	8 speed remote control and timer						8 speed remote control and timer					

COLOUR AND VARIANTS

FAN ONLY



MADC123WWR / MADC133WWR
Matt White



MADC123MMR / MADC133MMR
Matt Black



MADC123WOR / MADC133WOR
Matt White / Oak

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MADC1233WWR / MADC1333WWR
Matt White



MADC1233MMR / MADC1333MMR
Matt Black



MADC1233WOR / MADC1333WOR
Matt White / Oak

SUPPLIED WITH



WiFi Remote Control,
Light and Timer

ACCESSORIES



MDRDWIFI36W / MDRDWIFI72W
900mm / 1800mm Downrod
Matt White



MDRDWIFI36M / MDRDWIFI72M
900mm / 1800mm Downrod
Matt Black







METRO DC

Smart low ceiling solution
1320mm (52")
Smart DC ceiling fan

METRO DC

Smart low ceiling solution



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



CCT




Variable
Dimming

FEATURES


- Brushless quiet and efficient 33W DC motor
- WiFi connectivity and operate via Smart Life application
- Low ceiling and slimline designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- Steel body, canopy and ABS blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 16W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)

DIMENSIONS

FAN ONLY

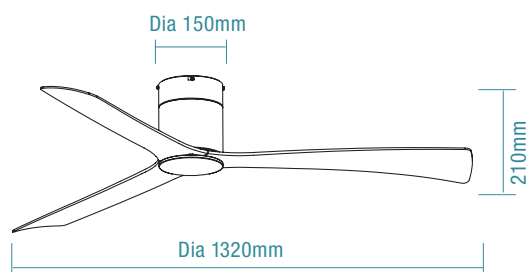

FAN LED LIGHT

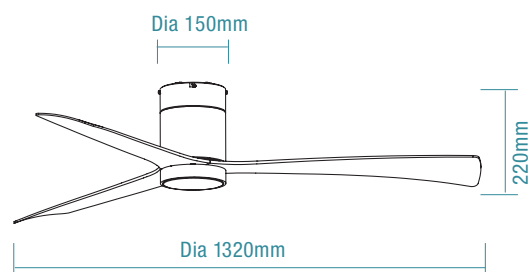

SPECIFICATIONS

	Fan Only			Fan LED Light		
Ordering Code	MDCM133M	MDCM133W	MDCM133WO	MDCM1333M	MDCM1333W	MDCM1333WO
Colour	Matt Black	Matt White	White Oak	Matt Black	Matt White	White Oak
Power Wattage	33W			33W		
Voltage	220-240Va.c. 50Hz			220-240Va.c. 50Hz		
Blade Diameter	1320mm (52")			1320mm (52")		
Air Movement m³/hr						
Speed 6 (Highest)	14,200m ³ /hr			14,200m ³ /hr		
Speed 5	11270m ³ /hr			11270m ³ /hr		
Speed 4	9412m ³ /hr			9412m ³ /hr		
Speed 3	7253m ³ /hr			7253m ³ /hr		
Speed 2	4526m ³ /hr			4526m ³ /hr		
Speed 1 (Lowest)	2500m ³ /hr			2500m ³ /hr		
Blade Pitch	12°			12°		
Hangsure Canopy	n/a (flat surface level installation only)			n/a (flat surface level installation only)		
Lighting Wattage / Type	-			16W LED		
Colour Temperature	-			2700K - 6000K		
Lumens Output	-			up to 1885lm		
Rated Lifetime	-			35,000 hours @ Ta25°C		
Dimmable	-			Variable dimming		
Wall Control / Remote Control	8 speed remote control and timer			8 speed remote control and timer		

COLOUR AND VARIANTS

FAN ONLY



MDCM133M
Matt Black



MDCM133W
Matt White



MDCM133WO
White Oak

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MDCM1333M
Matt Black



MDCM1333W
Matt White



MDCM1333WO
White Oak

SUPPLIED WITH



WiFi Remote Control,
Light and Timer

SCORPION DC

Robust designed



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



CCT



Variable
Dimming

FEATURES

- Brushless quiet and efficient 34W DC motor
- WiFi connectivity and operate via Smart Life application
- Low ceiling and slimline designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- Steel body, canopy and ABS blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 20W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)

SPECIFICATIONS

Ordering Code	Fan Only					Fan LED Light				
	MSDC103W	MSDC103M	MSDC133W	MSDC133M	MSDC133GC	MSDC1033W	MSDC1033M	MSDC1333W	MSDC1333M	MSDC1333GC
Colour	Matt White	Matt Black	Matt White	Matt Black	Graphite / Carbon	Matt White	Matt Black	Matt White	Matt Black	Graphite / Carbon
Power Wattage	34W					34W				
Voltage	220-240Va.c. 50Hz					220-240Va.c. 50Hz				
Blade Diameter	1066mm (42")		1320mm (52")			1066mm (42")		1320mm (52")		
Air Movement m³/hr										
Speed 6 (Highest)	10,300m ³ /hr					10,300m ³ /hr				
Speed 5	9,020m ³ /hr					9,020m ³ /hr				
Speed 4	8,540m ³ /hr					8,540m ³ /hr				
Speed 3	7,700m ³ /hr					7,700m ³ /hr				
Speed 2	6,680m ³ /hr					6,680m ³ /hr				
Speed 1 (Lowest)	5,640m ³ /hr					5,640m ³ /hr				
Blade Pitch	13°					13°				
Hangsure Canopy	Maximum 15°					Maximum 15°				
Lighting Wattage / Type	-					20W LED				
Colour Temperature	-					2700K - 6000K				
Lumens Output	-					Up to 2400lm				
Rated Lifetime	-					35,000 hours @ Ta25°C				
Dimmable	-					Variable dimming				
Wall Control / Remote Control	8 speed remote control and timer					8 speed remote control and timer				

COLOUR AND VARIANTS

FAN ONLY



MSDC103W / MSDC133W
Matt White



MSDC103M / MSDC133M
Matt Black



MSDC133GC
Graphite / Carbon

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MSDC1033W / MSDC1333W
Matt White



MSDC1033M / MSDC1333M
Matt Black



MSDC1333GC
Graphite / Carbon

SUPPLIED WITH



WiFi Remote Control
and Timer

ACCESSORIES



MDRDWIFI36W / MDRDWIFI72W
900mm / 1800mm Downrod
Matt White




MDRDWIFI36M / MDRDWIFI72M
900mm / 1800mm Downrod
Matt Black




MDRDWIFI36G
900mm Downrod
Graphite

DIMENSIONS

FAN ONLY

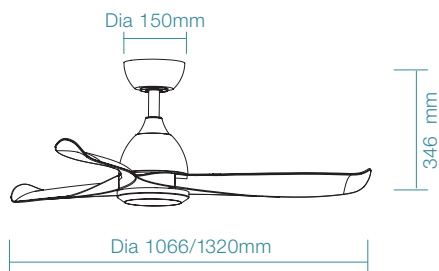

FAN LED LIGHT

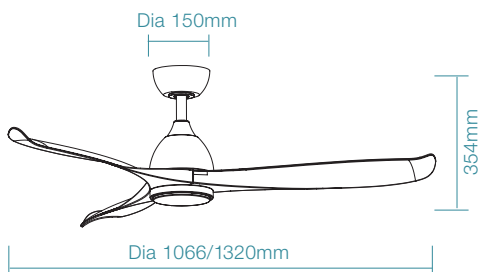

Smart DC
Ceiling Fans





RIVIERA DC

Slim by design
1320mm (52")
Smart DC ceiling fan

RIVIERA DC

Slim by design



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



CCT




Variable
Dimming

FEATURES


- Brushless quiet and efficient 33W DC motor
- WiFi connectivity and operate via Smart Life application
- Slimline designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- Steel body, canopy and ABS blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 18W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)

DIMENSIONS

FAN ONLY

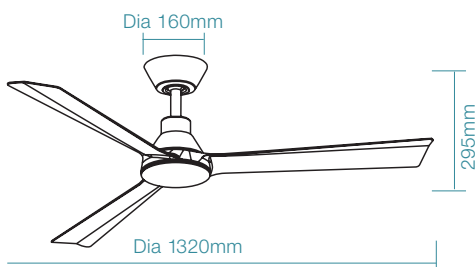

FAN LED LIGHT

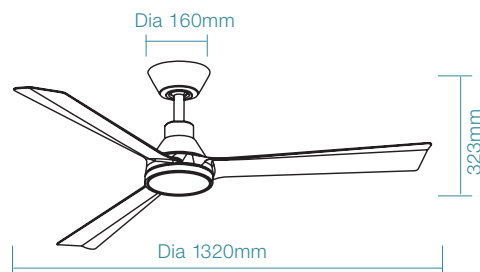

SPECIFICATIONS

	Fan Only			Fan LED Light		
Ordering Code	MRDC133W	MRDC133M	MRDC133ACH*	MRDC1333W	MRDC1333M	MRDC1333ACH*
Colour	Matt White	Matt Black	Antique Bronze / Charcoal	Matt White	Matt Black	Antique Bronze / Charcoal
Power Wattage	33W			33W		
Voltage	220-240Va.c. 50Hz			220-240Va.c. 50Hz		
Blade Diameter	1320mm (52")			1320mm (52")		
Air Movement m³/hr						
Speed 6 (Highest)	12,000m ³ /hr			12,000m ³ /hr		
Speed 5	10,000m ³ /hr			10,000m ³ /hr		
Speed 4	8,000m ³ /hr			8,000m ³ /hr		
Speed 3	6,000m ³ /hr			6,000m ³ /hr		
Speed 2	4,000m ³ /hr			4,000m ³ /hr		
Speed 1 (Lowest)	2,000m ³ /hr			2,000m ³ /hr		
Blade Pitch	13°			13°		
Hangsure Canopy	Maximum 10°			Maximum 10°		
Lighting Wattage / Type	-			18W LED		
Colour Temperature	-			2700K - 6000K		
Lumens Output	-			Up to 1885lm		
Rated Lifetime	-			35,000 hours @ Ta25°C		
Dimmable	-			Variable dimming		
Wall Control / Remote Control	8 speed remote control and timer			8 speed remote control and timer		

*Indoor applications only.

COLOUR AND VARIANTS

FAN ONLY



MRDC133W
Matt White



MRDC133M
Matt Black



MRDC133ACH*
Antique Bronze / Charcoal

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MRDC1333W
Matt White



MRDC1333M
Matt Black



MRDC1333ACH*
Antique Bronze / Charcoal

SUPPLIED WITH



WiFi Remote Control,
Light and Timer

ACCESSORIES



MDRDWIFI36W / MDRDWIFI72W
900mm / 1800mm Downrod
Matt White



MDRDWIFI36M / MDRDWIFI72M
900mm / 1800mm Downrod
Matt Black



MDRDWIFI36AB
900mm Downrod
Antique Bronze





HAMPTON DC

A statement in style
1320mm (52")
Smart DC ceiling fan

HAMPTON DC

A Statement in style



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



CCT




Variable
Dimming

FEATURES


- Brushless quiet and efficient 40W DC motor
- WiFi connectivity and operate via Smart Life application
- Slimline designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- Steel body, canopy and ABS blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 18W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)
- Supplied with 2 downrods

DIMENSIONS

FAN ONLY

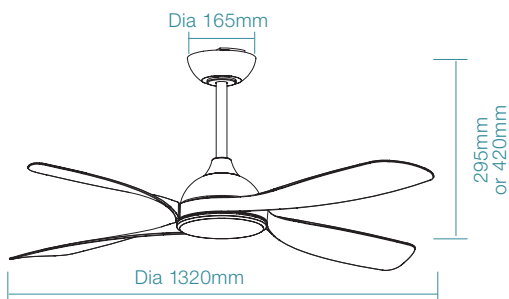

FAN LED LIGHT

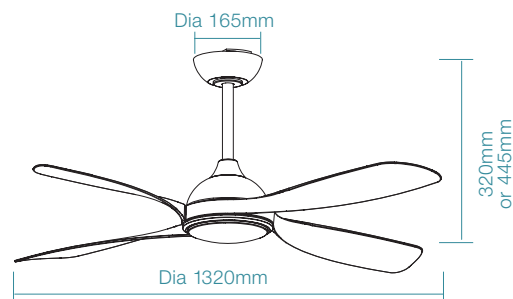

SPECIFICATIONS

	Fan Only			Fan LED Light		
Ordering Code	MHDC134W	MHDC134M	MHDC134WO	MHDC1343W	MHDC1343M	MHDC1343WO
Colour	Matt White	Matt Black	Matt White / Oak	Matt White	Matt Black	Matt White / Oak
Power Wattage	40W			40W		
Voltage	220-240Va.c. 50Hz			220-240Va.c. 50Hz		
Blade Diameter	1320mm (52")			1320mm (52")		
Air Movement m³/hr						
Speed 6 (Highest)	15,600m ³ /hr			15,600m ³ /hr		
Speed 5	12,700m ³ /hr			12,700m ³ /hr		
Speed 4	9,260m ³ /hr			9,260m ³ /hr		
Speed 3	7,900m ³ /hr			7,900m ³ /hr		
Speed 2	6,440m ³ /hr			6,440m ³ /hr		
Speed 1 (Lowest)	4,860m ³ /hr			4,860m ³ /hr		
Blade Pitch	14°			14°		
Hangsure Canopy	Maximum 10°			Maximum 10°		
Lighting Wattage / Type	-			18W LED		
Colour Temperature	-			2700K - 6000K		
Lumens Output	-			Up to 1955lm		
Rated Lifetime	-			30,000 hours @ Ta25°C		
Dimmable	-			Variable dimming		
Wall Control / Remote Control	8 speed remote control and timer			8 speed remote control and timer		

COLOUR AND VARIANTS

FAN ONLY



MHDC134W
Matt White



MHDC134M
Matt Black



MHDC134WO
Matt White / Oak

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MHDC1343W
Matt White



MHDC1343M
Matt Black



MHDC1343WO
Matt White / Oak

SUPPLIED WITH



WiFi Remote Control,
Light and Timer

ACCESSORIES



MDRDWIFI36W / MDRDWIFI72W
900mm / 1800mm Downrod
Matt White



MDRDWIFI36M / MDRDWIFI72M
900mm / 1800mm Downrod
Matt Black

GENOA DC

Minimal Sophistication



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



CCT



Variable
Dimming

FEATURES

- Brushless quiet and efficient 33W DC motor
- WiFi connectivity and operate via Smart Life application
- Low ceiling and slimline designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- Steel body, canopy and ABS blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 16W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)

SPECIFICATIONS

	Fan Only		Fan LED Light	
Ordering Code	MGDC133W	MGDC133M	MGDC1333W	MGDC1333M
Colour	Matt White	Matt Black	Matt White	Matt Black
Power Wattage	33W		33W	
Voltage	220-240Va.c. 50Hz		220-240Va.c. 50Hz	
Blade Diameter	1270mm (50")		1270mm (50")	
Air Movement m³/hr				
Speed 6 (Highest)	14,000m ³ /hr		14,000m ³ /hr	
Speed 5	11,425m ³ /hr		11,425m ³ /hr	
Speed 4	9,690m ³ /hr		9,690m ³ /hr	
Speed 3	7,500m ³ /hr		7,500m ³ /hr	
Speed 2	4,660m ³ /hr		4,660m ³ /hr	
Speed 1 (Lowest)	2,500m ³ /hr		2,500m ³ /hr	
Blade Pitch	17°		17°	
Hangsure Canopy	Maximum 10°		Maximum 10°	
Lighting Wattage / Type	-		16W LED	
Colour Temperature	-		2700K - 6000K	
Lumens Output	-		Up to 1885lm	
Rated Lifetime	-		35,000 hours @ Ta25°C	
Dimmable	-		Variable dimming	
Wall Control / Remote Control	8 speed remote control and timer		8 speed remote control and timer	



COLOUR AND VARIANTS

FAN ONLY



MGDC133W
Matt White



MGDC133M
Matt Black

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MGDC1333W
Matt White



MGDC1333M
Matt Black

SUPPLIED WITH



WiFi Remote Control
and Timer

ACCESSORIES




MDRDWIFI36W / MDRDWIFI72W
900mm / 1800mm Downrod
Matt White




MDRDWIFI36M / MDRDWIFI72M
900mm / 1800mm Downrod
Matt Black

DIMENSIONS

FAN ONLY

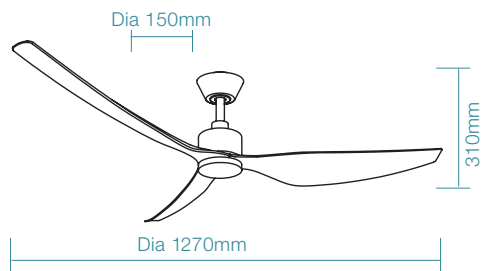

FAN LED LIGHT

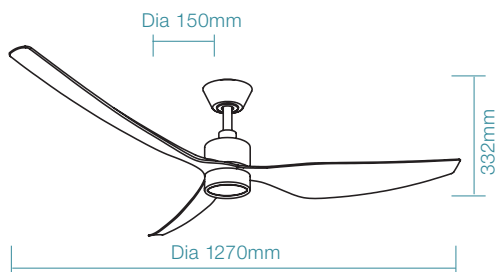

Smart DC
Ceiling Fans

CARRARA DC

Small room performer



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



CCT



Variable
Dimming

FEATURES

- Brushless quiet and efficient 33W DC motor
- WiFi connectivity and operate via Smart Life application
- Low ceiling and slimline designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- Steel body, canopy and ABS blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 16W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)

SPECIFICATIONS

	Fan Only		Fan LED Light	
Ordering Code	MCDC124W	MCDC124M	MCDC1243W	MCDC1243M
Colour	Matt White	Matt Black	Matt White	Matt Black
Power Wattage	33W		33W	
Voltage	220-240Va.c. 50Hz		220-240Va.c. 50Hz	
Blade Diameter	1220mm (48")		1220mm (48")	
Air Movement m³/hr				
Speed 6 (Highest)	13,800m ³ /hr		13,800m ³ /hr	
Speed 5	11,270m ³ /hr		11,270m ³ /hr	
Speed 4	9,410m ³ /hr		9,410m ³ /hr	
Speed 3	7,250m ³ /hr		7,250m ³ /hr	
Speed 2	4,520m ³ /hr		4,520m ³ /hr	
Speed 1 (Lowest)	2,500m ³ /hr		2,500m ³ /hr	
Blade Pitch	15°		15°	
Hangsure Canopy	0° (Flat level surface installation only)		0° (Flat level surface installation only)	
Lighting Wattage / Type	-		16W LED	
Colour Temperature	-		2700K - 6000K	
Lumens Output	-		1885lm	
Rated Lifetime	-		35,000 hours @ Ta25°C	
Dimmable	-		Variable dimming	
Wall Control / Remote Control	8 speed remote control and timer		8 speed remote control and timer	

COLOUR AND VARIANTS

FAN ONLY



MCDC124W
Matt White



MCDC124M
Matt Black

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MCDC1243W
Matt White



MCDC1243M
Matt Black


SUPPLIED WITH




WiFi Remote Control
and Timer

DIMENSIONS

FAN ONLY

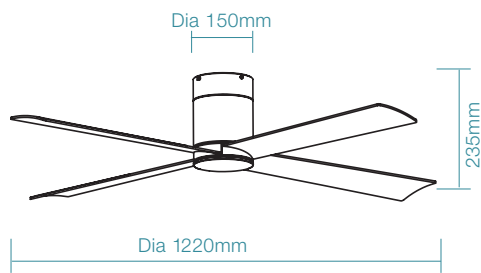

FAN LED LIGHT

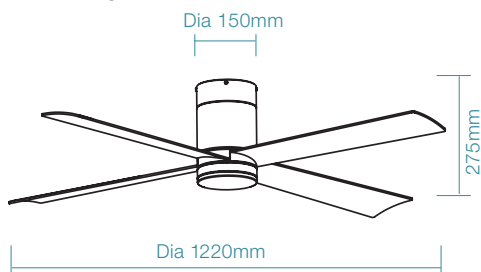

Smart DC
Ceiling Fans

FRESNO DC

Stylish practicality



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



CCT



Variable
Dimming

FEATURES

- Brushless quiet and efficient 33W DC motor
- WiFi connectivity and operate via Smart Life application
- Low ceiling and slimline designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- Steel body, canopy and ABS blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 16W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)

SPECIFICATIONS

	Fan Only		Fan LED Light	
Ordering Code	MFDC133W	MFDC133M	MFDC1333W	MFDC1333M
Colour	Matt White	Matt Black	Matt White	Matt Black
Power Wattage	33W		33W	
Voltage	220-240Va.c. 50Hz		220-240Va.c. 50Hz	
Blade Diameter	1320mm (52")		1320mm (52")	
Air Movement m³/hr				
Speed 6 (Highest)	14,700m ³ /hr		14,700m ³ /hr	
Speed 5	12,170m ³ /hr		12,170m ³ /hr	
Speed 4	10,170m ³ /hr		10,170m ³ /hr	
Speed 3	7,830m ³ /hr		7,830m ³ /hr	
Speed 2	4,890m ³ /hr		4,890m ³ /hr	
Speed 1 (Lowest)	2,500m ³ /hr		2,500m ³ /hr	
Blade Pitch	15°		15°	
Hangsure Canopy	0° (Flat level surface installation only)		0° (Flat level surface installation only)	
Lighting Wattage / Type	-		16W LED	
Colour Temperature	-		2700K - 6000K	
Lumens Output	-		Up to 1415lm	
Rated Lifetime	-		35,000 hours @ Ta25°C	
Dimmable	-		Variable dimming	
Wall Control / Remote Control	8 speed remote control and timer		8 speed remote control and timer	



COLOUR AND VARIANTS

FAN ONLY



MFDC133W
Matt White



MFDC133M
Matt Black

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MFDC1333W
Matt White



MFDC1333M
Matt Black


SUPPLIED WITH




WiFi Remote Control
and Timer

DIMENSIONS

FAN ONLY

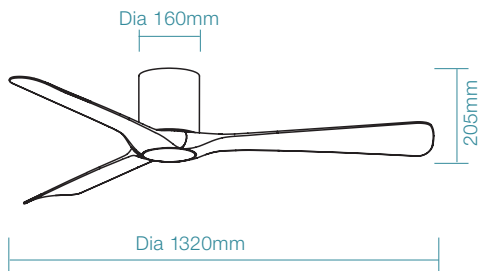

FAN LED LIGHT

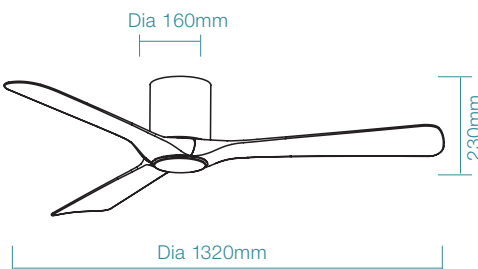

DAYTONA DC

IP55 rated



Warranty



Wi-Fi



Ingress Protection



Indoor & Covered Outdoor Use



Summer/Winter Reverse Function



Tropical Rated



Coastal Rated



CCT



Variable Dimming

FEATURES

- Brushless quiet and efficient 33W DC motor
- WiFi connectivity and operate via Smart Life application
- IP55 rated ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- All ABS body, canopy and blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 24W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)
- Supplied with 2 downrods

SPECIFICATIONS

	Fan Only	Fan LED Light
Ordering Code	MDDC133M	MDDC1333M
Colour	Matt Black	Matt Black
Power Wattage	33W	33W
Voltage	220-240Va.c. 50Hz	220-240Va.c. 50Hz
Blade Diameter	1320mm (52")	1320mm (52")
Air Movement m³/hr		
Speed 6 (Highest)	11,300m ³ /hr	11,300m ³ /hr
Speed 5	8,940m ³ /hr	8,940m ³ /hr
Speed 4	8,340m ³ /hr	8,340m ³ /hr
Speed 3	6,060m ³ /hr	6,060m ³ /hr
Speed 2	5,340m ³ /hr	5,340m ³ /hr
Speed 1 (Lowest)	3,780m ³ /hr	3,780m ³ /hr
Blade Pitch	18°	18°
Hangsure Canopy	0° (Flat level surface installation only)	0° (Flat level surface installation only)
Lighting Wattage / Type	-	24W LED
Colour Temperature	-	2700K - 6000K
Lumens Output	-	Up to 2360lm
Rated Lifetime	-	35,000 hours @ Ta25°C
Dimmable	-	Variable dimming
Wall Control / Remote Control	8 speed remote control and timer	8 speed remote control and timer

COLOUR AND VARIANTS

FAN ONLY



MCCD133M
Matt Black

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MCCD1333M
Matt Black


SUPPLIED WITH




WiFi Remote Control
and Timer


DIMENSIONS

FAN ONLY

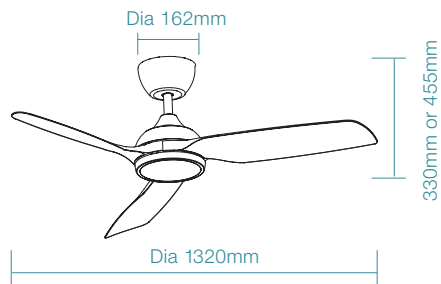

FAN LED LIGHT

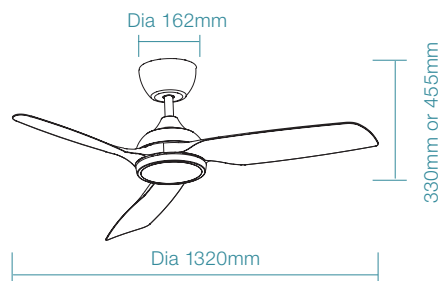

 For more product information please visit our website.



Smart DC
Ceiling Fans





MALLORCA DC

Architecturally Designed
1320mm (52")
Smart DC ceiling fan

MALLORCA DC

Architecturally designed



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



CCT




Variable
Dimming

FEATURES


- Brushless quiet and efficient 32W DC motor
- WiFi connectivity and operate via Smart Life application
- Low ceiling and slimline designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- Steel body, canopy and solid timber blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 20W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)

DIMENSIONS

FAN ONLY

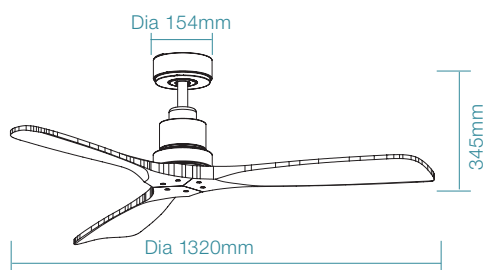

FAN LED LIGHT

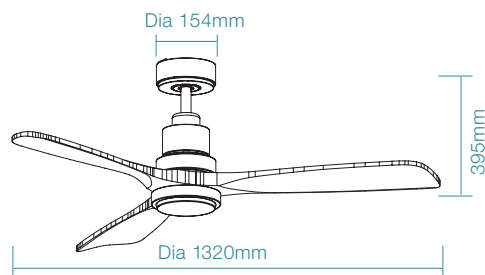

SPECIFICATIONS

	Fan Only		Fan LED Light	
Ordering Code	MMDC133WN	MMDC133MW	MMDC1333WN	MMDC1333MW
Colour	Matt White / Natural	Matt Black / Walnut	Matt White / Natural	Matt Black / Walnut
Power Wattage	32W		32W	
Voltage	220-240Va.c. 50Hz		220-240Va.c. 50Hz	
Blade Diameter	1320mm (52")		1320mm (52")	
Air Movement m ³ /hr				
Speed 6 (Highest)	8,540m ³ /hr		8,540m ³ /hr	
Speed 5	7,995m ³ /hr		7,995m ³ /hr	
Speed 4	7,100m ³ /hr		7,100m ³ /hr	
Speed 3	6,250m ³ /hr		6,250m ³ /hr	
Speed 2	5,265m ³ /hr		5,265m ³ /hr	
Speed 1 (Lowest)	4,120m ³ /hr		4,120m ³ /hr	
Blade Pitch	8°		8°	
Hangsure Canopy	Maximum 15°		Maximum 15°	
Lighting Wattage / Type	-		20W LED	
Colour Temperature	-		2700K - 6000K	
Lumens Output	-		Up to 2120lm	
Rated Lifetime	-		35,000 hours @ Ta25°C	
Dimmable	-		Variable dimming	
Wall Control / Remote Control	8 speed remote control and timer		8 speed remote control and timer	

COLOUR AND VARIANTS

FAN ONLY



MMDC133WN
Matt White / Natural



MMDC133MW
Matt Black / Walnut

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MMDC1333WN
Matt White / Natural



MMDC1333MW
Matt Black / Walnut

SUPPLIED WITH



WiFi Remote Control,
Light and Timer

ACCESSORIES



MDRDWIFI36W / MDRDWIFI72W
900mm / 1800mm Downrod
Matt White



MDRDWIFI36M / MDRDWIFI72M
900mm / 1800mm Downrod
Matt Black

MALLORCA MINI DC

Architecturally designed



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



CCT



Variable
Dimming

FEATURES

- Brushless quiet and efficient 32W DC motor
- WiFi connectivity and operate via Smart Life application
- Low ceiling and slimline designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- Steel body, canopy and solid timber blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 20W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)

SPECIFICATIONS

	Fan Only		Fan LED Light	
Ordering Code	MMDC103WN	MMDC103MW	MMDC1033WN	MMDC1033MW
Colour	Matt White / Natural	Matt Black / Walnut	Matt White / Natural	Matt Black / Walnut
Power Wattage	32W		32W	
Voltage	220-240Va.c. 50Hz		220-240Va.c. 50Hz	
Blade Diameter	1066mm (42")		1066mm (42")	
Air Movement m ³ /hr				
Speed 6 (Highest)	8,540m ³ /hr		8,540m ³ /hr	
Speed 5	7,995m ³ /hr		7,995m ³ /hr	
Speed 4	7,100m ³ /hr		7,100m ³ /hr	
Speed 3	6,250m ³ /hr		6,250m ³ /hr	
Speed 2	5,265m ³ /hr		5,265m ³ /hr	
Speed 1 (Lowest)	4,120m ³ /hr		4,120m ³ /hr	
Blade Pitch	8°		8°	
Hangsure Canopy	Maximum 15°		Maximum 15°	
Lighting Wattage / Type	-		20W LED	
Colour Temperature	-		2700K - 6000K	
Lumens Output	-		Up to 2120lm	
Rated Lifetime	-		35,000 hours @ Ta25°C	
Dimmable	-		Variable dimming	
Wall Control / Remote Control	8 speed remote control and timer		8 speed remote control and timer	



COLOUR AND VARIANTS

FAN ONLY



MMDC103WN
Matt White / Natural



MMDC103MW
Matt Black / Walnut

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MMDC1033WN
Matt White / Natural



MMDC1033MW
Matt Black / Walnut

SUPPLIED WITH



WiFi Remote Control
and Timer

ACCESSORIES




MDRDWIFI36W / MDRDWIFI72W
900mm / 1800mm Downrod
Matt White




MDRDWIFI36M / MDRDWIFI72M
900mm / 1800mm Downrod
Matt Black


DIMENSIONS

FAN ONLY

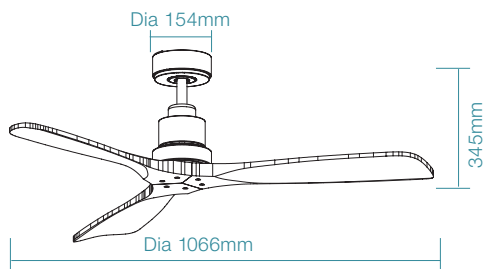

FAN LED LIGHT

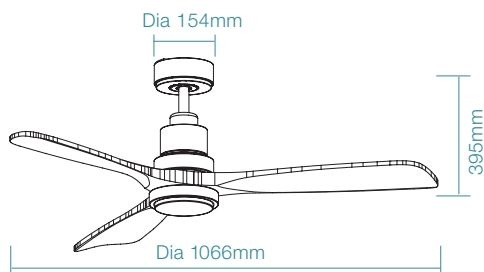

 For more product information please visit our website.







NORFOLK DC

Functional elegance
1220mm (48") / 1420mm (56")
Smart DC ceiling fan

NORFOLK DC

Functional elegance



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



CCT




Variable
Dimming

FEATURES


- Brushless quiet and efficient 18W or 32W DC motor
- WiFi connectivity and operate via Smart Life application
- Low profile designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- Steel body, canopy and solid timber blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 20W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)

DIMENSIONS

FAN ONLY

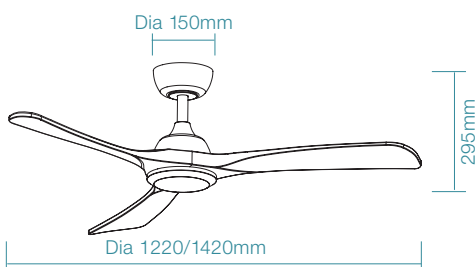

FAN LED LIGHT

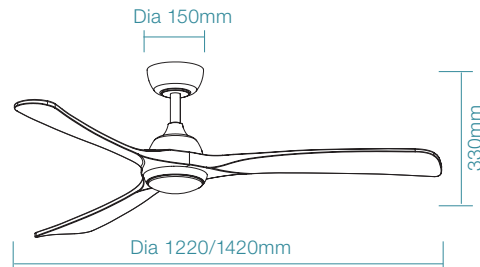

SPECIFICATIONS

Ordering Code	Fan Only						Fan LED Light					
	MNDC123WN	MNDC123WW	MNDC123MW	MNDC143WN	MNDC143WW	MNDC143MW	MNDC1233WN	MNDC1233WW	MNDC1233MW	MNDC1433WN	MNDC1433WW	MNDC1433MW
Colour	Matt White / Natural	Matt White / White Wash	Matt Black / Walnut	Matt White / Natural	Matt White / White Wash	Matt Black / Walnut	Matt White / Natural	Matt White / White Wash	Matt Black / Walnut	Matt White / Natural	Matt White / White Wash	Matt Black / Walnut
Power Wattage	18W			32W			18W			32W		
Voltage	220-240Va.c. 50Hz			220-240Va.c. 50Hz			220-240Va.c. 50Hz			220-240Va.c. 50Hz		
Blade Diameter	1220mm (48")			1420mm (56")			1220mm (48")			1420mm (56")		
Air Movement m ³ /hr												
Speed 6 (Highest)	8,860m ³ /hr			9,950m ³ /hr			8,860m ³ /hr			9,950m ³ /hr		
Speed 5	5,610m ³ /hr			7,850m ³ /hr			5,610m ³ /hr			7,850m ³ /hr		
Speed 4	4,520m ³ /hr			6,780m ³ /hr			4,520m ³ /hr			6,780m ³ /hr		
Speed 3	5,367m ³ /hr			5,530m ³ /hr			5,367m ³ /hr			5,530m ³ /hr		
Speed 2	4,168m ³ /hr			4,080m ³ /hr			4,168m ³ /hr			4,080m ³ /hr		
Speed 1 (Lowest)	3,780m ³ /hr			3,260m ³ /hr			3,780m ³ /hr			3,260m ³ /hr		
Blade Pitch	9°						9°					
Hangsure Canopy	Maximum 15°						Maximum 15°					
Lighting Wattage / Type	-						20W LED					
Colour Temperature	-						2700K - 6000K					
Lumens Output	-						Up to 2420lm					
Rated Lifetime	-						35,000 hours @ Ta25°C					
Dimmable	-						Variable dimming					
Wall Control / Remote Control	8 speed remote control and timer						8 speed remote control and timer					

COLOUR AND VARIANTS

FAN ONLY



MNDC123WN / MNDC143WN
Matt White / Natural



MNDC123WW / MNDC143WW
Matt White / White Wash



MNDC123MW / MNDC143MW
Matt Black / Walnut

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MNDC1233WN / MNDC1433WN
Matt White / Natural



MNDC1233WW / MNDC1433WW
Matt White / White Wash



MNDC1233MW / MNDC1433MW
Matt Black / Walnut

SUPPLIED WITH



WiFi Remote Control,
Light and Timer

ACCESSORIES



MDRDWIFI36W / MDRDWIFI72W
900mm / 1800mm Downrod
Matt White



MDRDWIFI36M / MDRDWIFI72M
900mm / 1800mm Downrod
Matt Black

NORFOLK AERO DC

Form meets function



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function

FEATURES

- Brushless quiet and efficient 30W or 50W DC motor
- WiFi connectivity and operate via Smart Life application
- Low profile designed ideal for indoor and covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- Steel body, canopy and solid timber blades
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control

SPECIFICATIONS

Step 1. Motor

Ordering Code	Motor Only
Matt White	MNDCW
Matt Black	MNDCM

NB: Motor and blades are sold separately. Choose your motor (Step 1) and blade pack (Step 2) from below to order a complete unit.

Step 2. Blades

Ordering Code	Blades					
	MNB180N	MNB180WW	MNB180W	MNB220N	MNB220WW	MNB220W
Colour	Natural	White Wash	Walnut	Natural	White Wash	Walnut
Power Wattage	30W			50W		
Voltage	220-240Va.c. 50Hz			220-240Va.c. 50Hz		
Blade Diameter	1765mm (70")			2175mm (86")		
Air Movement m³/hr						
Speed 6 (Highest)	10,200m ³ /hr			12,750m ³ /hr		
Speed 5	9,052m ³ /hr			11,201m ³ /hr		
Speed 4	8,521m ³ /hr			9,287m ³ /hr		
Speed 3	6,878m ³ /hr			8,214m ³ /hr		
Speed 2	5,230m ³ /hr			6,973m ³ /hr		
Speed 1 (Lowest)	3,150m ³ /hr			4,913m ³ /hr		
Blade Pitch	9°			9°		
Hangsure Canopy	Maximum 15°			Maximum 15°		
Wall Control / Remote Control	8 speed remote control and timer			8 speed remote control and timer		



COLOUR AND VARIANTS

FAN ONLY



MNDCW & MNB180N / MNB220N
Matt White / Natural



MNDCW & MNB180WW / MNB220WW
Matt White / White Wash



MNDCM & MNB180W / MNB220W
Matt Black / Walnut

SUPPLIED WITH



WiFi Remote Control
and Timer

ACCESSORIES




MDRDWIFI36W / MDRDWIFI72W
900mm / 1800mm Downrod
Matt White




MDRDWIFI36M / MDRDWIFI72M
900mm / 1800mm Downrod
Matt Black


DIMENSIONS

FAN ONLY

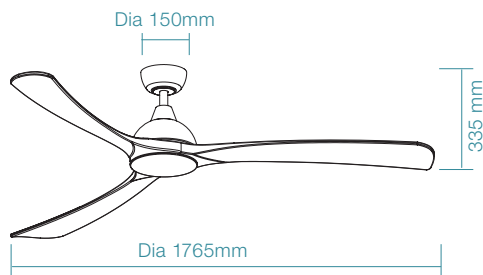

FAN LED LIGHT

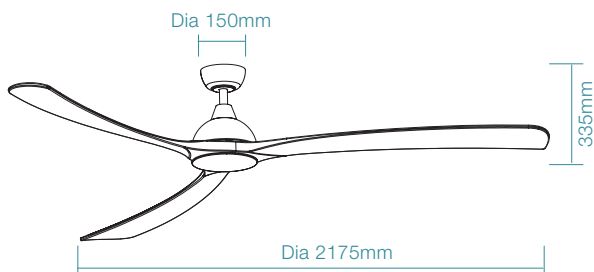

 For more product information please visit our website.



KINGSTON DC

Outdoor entertainer



Warranty



Wi-Fi



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



CCT



Variable
Dimming

FEATURES

- Brushless quiet and efficient 32W DC motor
- WiFi connectivity and operate via Smart Life application
- Robust palm leaf designed ideal for covered outdoor applications
- Unique comfort sleep and breeze mode + 6 other speed settings
- Steel body, canopy and ABS blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 8 speed remote control
- 20W LED with variable dimming (light model only)
- Variable 6 stage colour temperature between 2700K to 6000K (light model only)

SPECIFICATIONS

	Fan Only		Fan LED Light	
Ordering Code	MKDC124W	MKDC1240B	MKDC1243W	MKDC12430B
Colour	Matt White / White Wash	Old Bronze / Walnut	Matt White / White Wash	Old Bronze / Walnut
Power Wattage	32W		32W	
Voltage	220-240Va.c. 50Hz		220-240Va.c. 50Hz	
Blade Diameter	1265mm (50")		1265mm (50")	
Air Movement m ³ /hr				
Speed 6 (Highest)	9,200m ³ /hr		9,200m ³ /hr	
Speed 5	8,082m ³ /hr		8,082m ³ /hr	
Speed 4	6,701m ³ /hr		6,701m ³ /hr	
Speed 3	5,927m ³ /hr		5,927m ³ /hr	
Speed 2	5,032m ³ /hr		5,032m ³ /hr	
Speed 1 (Lowest)	3,545m ³ /hr		3,545m ³ /hr	
Blade Pitch	12°		12°	
Hangsure Canopy	Maximum 15°		Maximum 15°	
Lighting Wattage / Type	-		20W LED	
Colour Temperature	-		2700K - 6000K	
Lumens Output	-		Up to 2420lm	
Rated Lifetime	-		35,000 hours @ Ta25°C	
Dimmable	-		Variable dimming	
Wall Control / Remote Control	8 speed remote control and timer		8 speed remote control and timer	



COLOUR AND VARIANTS

FAN ONLY



MKDC124W
Matt White / White Wash



MKDC1240B
Old Bronze / Walnut

SUPPLIED WITH



WiFi Remote Control
and Timer

FAN LED LIGHT



MKDC1243W
Matt White / White Wash



MKDC12430B
Old Bronze / Walnut

SUPPLIED WITH



WiFi Remote Control
and Timer

ACCESSORIES




MDRDWIFI36W / MDRDWIFI72W
900mm / 1800mm Downrod
Matt White




MDRDWIFI360B
900mm Downrod
Old Bronze

DIMENSIONS

FAN ONLY

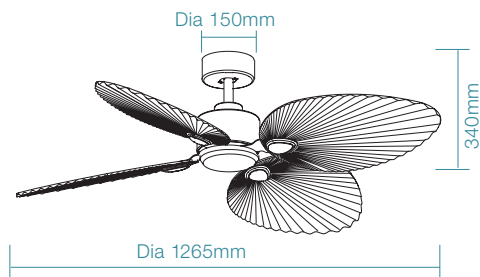

FAN LED LIGHT

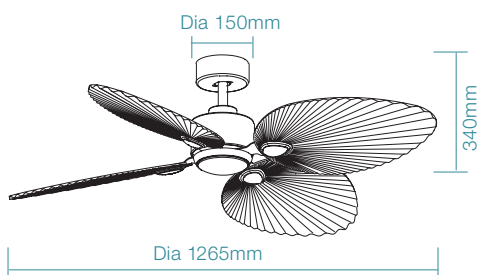





DC CEILING FANS

ADVANTAGES OF DC MOTOR CEILING FANS

High Efficiency

DC motors on average consume less energy than conventional ceiling fan motors.

Speed Control

DC motor controllers provide up to 5 speed settings and an easy to use reverse function for summer and winter operation.

Light Weight

DC motors weigh less than conventional fan motors, resulting in a lighter product that is easier to install for electricians.


Quiet Operation

DC motors are very quiet when in operation, ideal for bedrooms.

Remote Control:

DC Ceiling fans can be operated via a DC remote control (supplied).

Newport	74
Wave	78
Albatross	80
Albatross Mini	84





NEWPORT

Contemporary style
1420mm (56") DC ceiling fan

NEWPORT

Contemporary style



Warranty



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



Tricolour




3 Step Switch
Dimming

FEATURES


- Brushless quiet and efficient 35W DC motor
- Contemporary style ideal for indoor and covered outdoor applications
- Metal body, canopy and ABS blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 5 speed remote control
- 18W tricolour LED with 3 step switch dimming (light model only)
- Switchable colour temperature between 3000K, 4000K and 5000K (light model only)

DIMENSIONS

FAN ONLY

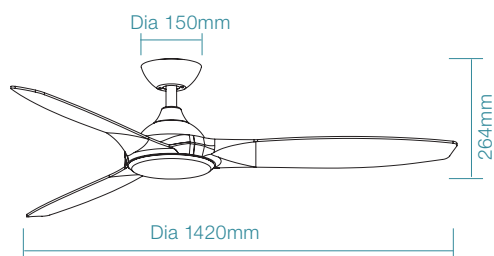

FAN LED LIGHT

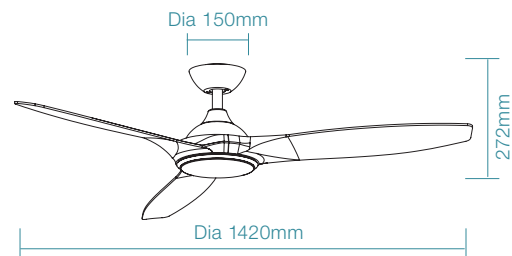

SPECIFICATIONS

	Fan Only				Fan LED Light			
Ordering Code	MNF143WWR	MNF143MMR	MNF143OWR	MNF143WOR	MNF1433WWR	MNF1433MMR	MNF1433OWR	MNF1433WOR
Colour	White Satin	Matt Black	Old Bronze / Oak	White / Oak	White Satin	Matt Black	Old Bronze / Oak	White / Oak
Power Wattage	35W				35W			
Voltage	220-240Va.c. 50Hz				220-240Va.c. 50Hz			
Blade Diameter	1420mm (56")				1420mm (56")			
Air Movement m³/hr								
Speed 1 (Highest)	13,000m ³ /hr				13,000m ³ /hr			
Speed 2	9,400m ³ /hr				9,400m ³ /hr			
Speed 3	8,400m ³ /hr				8,400m ³ /hr			
Speed 4	7,200m ³ /hr				7,200m ³ /hr			
Speed 5 (Lowest)	5,700m ³ /hr				5,700m ³ /hr			
Blade Pitch	15°				15°			
Hangsre Canopy	Maximum 15°				Maximum 15°			
Lighting Wattage / Type	-				18W LED			
Colour Temperature	-				3000K / 4000K / 5000K			
Lumens Output	-				1700lm / 1750lm / 1780lm			
Rated Lifetime	-				35,000 hours @ Ta25°C			
Dimmable	-				3 step dimming			
Wall Control / Remote Control	5 speed remote control and timer				5 speed remote control and timer			

COLOUR AND VARIANTS

FAN ONLY

SUPPLIED WITH



MNF143WWR
White Satin



MNF143MMR
Matt Black



MNF143OWR
Old Bronze / Oak



MNF143WOR
White / Oak



5 Speed Remote Control
and Timer

FAN LED LIGHT

SUPPLIED WITH



MNF1433WWR
White Satin



MNF1433MMR
Matt Black



MNF1433OWR
Old Bronze / Oak



MNF1433WOR
White / Oak



5 Speed Remote Control,
Light and Timer

ACCESSORIES



MDRD36WST / MDRD72WST
900mm / 1800mm Downrod
White Satin



MDRD36MT / MDRD72MT
900mm / 1800mm Downrod
Matt Black



MDRD36OT / MDRD72OT
900mm / 1800mm Downrod
Old Bronze

WAVE

Sleek and modern



6 YEAR



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



3000K 4000K
5000K

Tricolour



3 Step Switch
Dimming

FEATURES

- Brushless quiet and efficient 35W DC motor
- Robust designed ideal for indoor and covered outdoor applications
- Metal body, canopy and ABS blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 5 speed remote control
- 18W tricolour LED with 3 step switch dimming (light model only)
- Switchable colour temperature between 3000K, 4000K and 5000K (light model only)

SPECIFICATIONS

	Fan Only				Fan LED Light			
Ordering Code	MWF133WSR	MWF133MMR	MWF163WSR	MWF163MMR	MWF1333WSR	MWF1333MMR	MWF1633WSR	MWF1633MMR
Colour	White Satin	Matt Black	White Satin	Matt Black	White Satin	Matt Black	White Satin	Matt Black
Power Wattage	35W		35W		35W		35W	
Voltage	220-240Va.c. 50Hz		220-240Va.c. 50Hz		220-240Va.c. 50Hz		220-240Va.c. 50Hz	
Blade Diameter	1320mm (52")		1520mm (60")		1320mm (52")		1520mm (60")	
Air Movement m³/hr								
Speed 1 (Highest)	12,500m ³ /hr		13,500m ³ /hr		12,500m ³ /hr		13,500m ³ /hr	
Speed 2	10,375m ³ /hr		11,200m ³ /hr		10,375m ³ /hr		11,200m ³ /hr	
Speed 3	8,890m ³ /hr		9,600m ³ /hr		8,890m ³ /hr		9,600m ³ /hr	
Speed 4	7,325m ³ /hr		7,910m ³ /hr		7,325m ³ /hr		7,910m ³ /hr	
Speed 5 (Lowest)	5,440m ³ /hr		5,875m ³ /hr		5,440m ³ /hr		5,875m ³ /hr	
Blade Pitch	13°				13°			
Hangsure Canopy	Maximum 15°				Maximum 15°			
Lighting Wattage / Type	-				18W LED			
Colour Temperature	-				3000K / 4000K / 5000K			
Lumens Output	-				1850lm / 2100lm / 2000lm			
Rated Lifetime	-				35,000 hours @ Ta25°C			
Dimmable	-				3 step dimming			
Wall Control / Remote Control	5 speed remote control and timer				5 speed remote control and timer			



COLOUR AND VARIANTS

FAN ONLY



MWF133WSR / MWF163WSR
White Satin



MWF133MMR / MWF163MMR
Matt Black

SUPPLIED WITH



5 Speed Remote Control
and Timer

FAN LED LIGHT



MWF1333WSR / MWF1633WSR
White Satin



MWF1333MMR / MWF1633MMR
Matt Black

SUPPLIED WITH



5 Speed Remote Control,
Light and Timer

ACCESSORIES




MDRD36WS / MDRD72WS
900mm / 1800mm Downrod
White Satin




MDRD36M / MDRD72M
900mm / 1800mm Downrod
Matt Black

DIMENSIONS

FAN ONLY

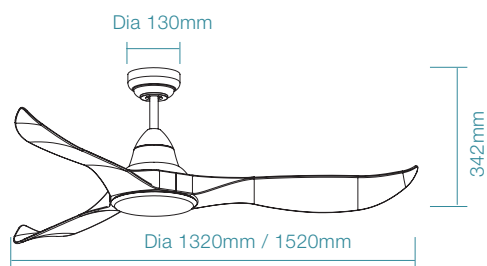

FAN LED LIGHT

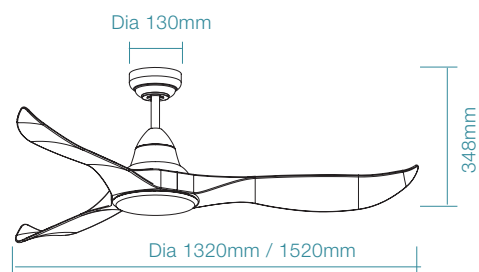





ALBATROSS

Large fan leader
1800mm (72") / 2100mm (84")
DC ceiling fan

ALBATROSS

Large fan leader



Warranty



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



Tricolour




3 Step Switch
Dimming

FEATURES


- Brushless quiet and efficient 35W DC motor
- Robust designed ideal for indoor and covered outdoor applications
- Metal body and canopy with aluminium blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode from remote control
- Supplied with 5 speed remote control
- 24W tricolour LED with 3 step switch dimming (light model only)
- Switchable colour temperature between 3000K, 4000K and 5000K (light model only)

DIMENSIONS

FAN ONLY

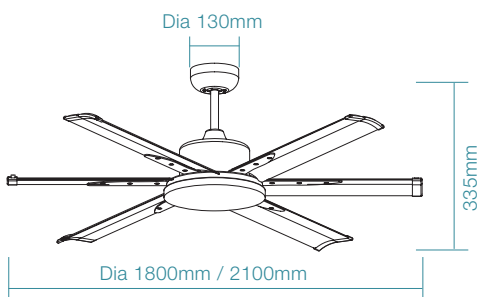

FAN LED LIGHT

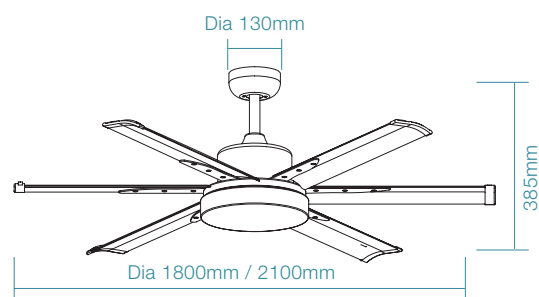

SPECIFICATIONS

Step 1. Motor

NB: Motor and blades are sold separately.
Choose your motor (Step 1) and blade pack (Step 2) from below to order a complete unit.

Specifications	Motor Only			Motor Led Light		
Ordering Code	MAFWWR	MAFMMR	MAFMBR	MAFML3WR	MAFML3MR	MAFML3BR
Colour	White	Matt Black	Brushed Nickel	White	Matt Black	Brushed Nickel
Voltage	220-240Va.c. 50Hz			220-240Va.c. 50Hz		
Lighting Wattage / Type				24W LED		
Colour Temperature	-			3000K / 4000K / 5000K		
Lumen Output	-			2180lm / 2560lm / 2470lm		
Rated Lifetime	-			35,000 hrs @ Ta25°C		
Dimmable	-			3 step dimming		
Wall Control / Remote Control	5 speed remote control and timer			5 speed remote control and timer		

Step 2. Blades

Specifications	Blade Pack					
Ordering Code	MAF180W	MAF180M	MAF180B	MAF210W	MAF210M	MAF210B
Colour	White	Matt Black	Brushed Nickel	White	Matt Black	Brushed Nickel
Blade Diameter	1800mm (72")			2100mm (84")		
Air Movement m ³ /hr						
Speed 1 (Highest)	15,600m ³ /hr			16,800m ³ /hr		
Speed 2	12,950m ³ /hr			13,950m ³ /hr		
Speed 3	11,090m ³ /hr			11,950m ³ /hr		
Speed 4	9,140m ³ /hr			9,850m ³ /hr		
Speed 5 (Lowest)	6,790m ³ /hr			7,310m ³ /hr		
Blade Pitch	17°			17°		
Hangsure Canopy	Maximum 15°			Maximum 15°		

COLOUR AND VARIANTS

FAN ONLY



MAFWWR / MAF180W
MAF210W
White



MAFMMR / MAF180M
MAF210M
Matt Black



MAFMBR / MAF180B
MAF210B
Brushed Nickel

SUPPLIED WITH



5 Speed Remote Control and Timer

FAN LED LIGHT



MAFML3WR / MAF180W
MAF210W
White



MAFML3MR / MAF180M
MAF210M
Matt Black



MAFML3BR / MAF180B
MAF210B
Brushed Nickel

SUPPLIED WITH



5 Speed Remote Control, Light and Timer

ACCESSORIES



MDRD36W / MDRD72W
900mm / 1800mm Downrod
White



MDRD36M / MDRD72M
900mm / 1800mm Downrod
Matt Black



MDRD36N / MDRD72N
900mm / 1800mm Downrod
Brushed Nickel

ALBATROSS MINI

Hi flow for smaller spaces



Warranty



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function

FEATURES

- Brushless quiet and efficient 35W DC motor
- Robust designed ideal for indoor and covered outdoor applications
- Metal body and canopy with aluminium blades
- Fully reversible for summer and winter mode from remote control
- Supplied with 5 speed remote control

SPECIFICATIONS

	Fan Only		
Ordering Code	MAF168WR	MAF168MR	MAF168BR
Colour	White	Matt Black	Brushed Nickel
Power Wattage	35W		
Voltage	220-240Va.c. 50Hz		
Blade Diameter	1650mm (65")		
Air Movement m ³ /hr			
Speed 1 (Highest)	14,400m ³ /hr		
Speed 2	11,950m ³ /hr		
Speed 3	10,240m ³ /hr		
Speed 4	8,440m ³ /hr		
Speed 5 (Lowest)	6,270m ³ /hr		
Blade Pitch	17°		
Hangsure Canopy	Maximum 15°		
Wall Control / Remote Control	5 speed remote control and timer		



COLOUR AND VARIANTS

FAN ONLY



MAF168WR
White



MAF168MR
Matt Black



MAF168BR
Brushed Nickel

SUPPLIED WITH



5 Speed Remote Control
and Timer

ACCESSORIES



MDRD36W / MDRD72W
900mm / 1800mm Downrod
White




MDRD36M / MDRD72M
900mm / 1800mm Downrod
Matt Black



MDRD36N
900mm Downrod
Brushed Nickel

DIMENSIONS

FAN ONLY

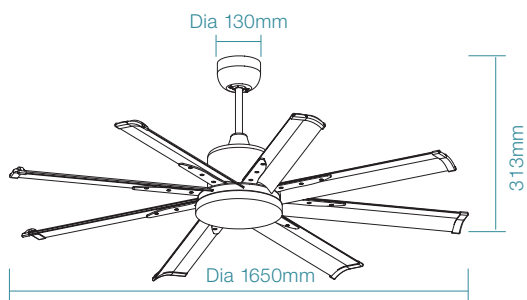

DC
Ceiling Fans





AC CEILING FANS

ADVANTAGES OF AC MOTOR CEILING FANS

Remote Control

AC motor ceiling fans provide more options for controllers. Choices from remote controls to a simple switch.

Low Cost

AC ceiling fans use less electricity than most household appliances, especially air conditioner as a standard AC powered ceiling fan will use less than 60W on the highest speed with the majority of models using much less.

More Choices

AC motor ceiling fans have been on the market for a while now. There are plenty of different options and styles for you to choose from that will be within your budget.

Discovery II	88
Link	92
Lifestyle.....	94
Razor.....	96
Precision	98
Governor	100





DISCOVERY II

ABS versatility
1220mm (48") / 1320mm (52")
1420mm (56") AC ceiling fan

DISCOVERY II

ABS versatility



Warranty



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



Tricolour




3 Step Switch
Dimming

FEATURES


- Powerful and efficient 65W AC motor
- Low profile designed ideal for indoor and covered outdoor applications
- All ABS body, canopy and blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode
- 15W tricolour LED with 3 step switch dimming (light model only)
- Switchable colour temperature between 3000K, 4000K and 5000K (light model only)

DIMENSIONS

FAN ONLY

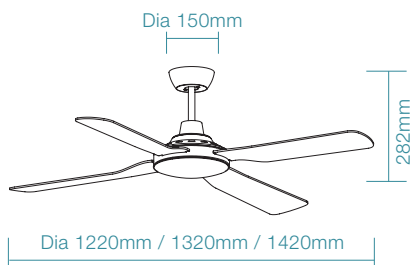

FAN LED LIGHT

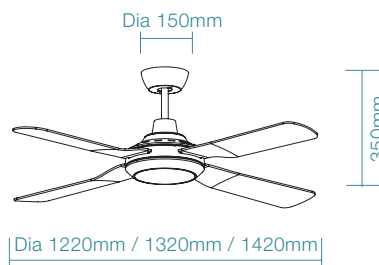

SPECIFICATIONS

Ordering Code	Fan Only						Fan LED Light					
	MDF124W	MDF124M	MDF134W	MDF134M	MDF144W	MDF144M	MDF1243W	MDF1243M	MDF1343W	MDF1343M	MDF1443W	MDF1443M
Colour	White Satin	Matt Black	White Satin	Matt Black	White Satin	Matt Black	White Satin	Matt Black	White Satin	Matt Black	White Satin	Matt Black
Power Wattage	65W						65W					
Voltage	220-240Va.c. 50Hz						220-240Va.c. 50Hz					
Blade Diameter	1220mm (48")		1320mm (52")		1420mm (56")		1220mm (48")		1320mm (52")		1420mm (56")	
Air Movement m ³ /hr												
Speed 1 (Highest)	11,835m ³ /hr		13,450m ³ /hr		15,260m ³ /hr		11,835m ³ /hr		13,450m ³ /hr		15,260m ³ /hr	
Speed 2			-				9,580m ³ /hr		10,200m ³ /hr		10,650m ³ /hr	
Speed 3 (Lowest)			-				6,450m ³ /hr		7,100m ³ /hr		7,700m ³ /hr	
Blade Pitch	13°		13°		10°		13°		13°		10°	
Hangsure Canopy	Maximum 15°						Maximum 15°					
Lighting Wattage / Type	-						15W LED					
Colour Temperature	-						3000K / 4000K / 5000K					
Lumens Output	-						1580lm / 1745lm / 1690lm					
Rated Lifetime	-						35,000 hours @ Ta25°C					
Dimmable	-						3 step dimming					

COLOUR AND VARIANTS

FAN ONLY



**MDF124W / MDF134W
MDF144W**
White Satin



**MDF124M / MDF134M
MDF144M**
Matt Black

FAN LED LIGHT



**MDF1243W / MDF1343W
MDF1443W**
White Satin



**MDF1243M / MDF1343M
MDF1443M**
Matt Black

ACCESSORIES



MDRA36WS / MDRA72WS
900mm / 1800mm Downrod
White Satin



MDRA36M / MDRA72M
900mm / 1800mm Downrod
Matt Black



MPREMS
Premier Remote
Control Kit



MPLCDS
Premier Remote
Control Kit

LINK

Best Value



Warranty



Indoor Use Only



Summer/Winter Reverse Function



Tricolour



3 Step Switch Dimming



E27

FEATURES

- Powerful and efficient 55W AC motor
- Low profile designed ideal for indoor applications
- Aluminium body, canopy and plywood blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode
- 15W tricolour LED with 3 step switch dimming (light model only)
- Switchable colour temperature between 3000K, 4000K and 5000K (light model only)
- E27 light model available (globes not included)

SPECIFICATIONS

	Fan Only		Fan LED Light			Fan E27* Light		
Ordering Code	FSL124W	FSL124M	FSL1243W	FSL1243M	FSL1243WR**	FSL1244W	FSL1244M	FSL1244WR**
Colour	White	Matt Black	White	Matt Black	White + Remote	White	Matt Black	White + Remote
Power Wattage	55W		55W			55W		
Voltage	220-240Va.c. 50Hz		220-240Va.c. 50Hz			220-240Va.c. 50Hz		
Blade Diameter	1220mm (48")		1220mm (48")			1220mm (48")		
Air Movement m ³ /hr								
Speed 1 (Highest)	7,600m ³ /hr		7,600m ³ /hr			7,600m ³ /hr		
Speed 2	5,020m ³ /hr		5,020m ³ /hr			5,020m ³ /hr		
Speed 3 (Lowest)	3,670m ³ /hr		3,670m ³ /hr			3,670m ³ /hr		
Blade Pitch	11°		11°			11°		
Hangsure Canopy	Maximum 15°		Maximum 15°			Maximum 15°		
Lighting Wattage / Type	-		15W LED			-		
Colour Temperature	-		3000K / 4000K / 5000K			-		
Lumens Output	-		1450lm / 1650lm / 1600lm			-		
Rated Lifetime	-		35,000 hours @ Ta25°C			-		
Dimmable	-		3 step dimming			-		

*Supplied with 2x E27 lamp holders. Globe not included.

**Supplied with remote control



COLOUR AND VARIANTS

FAN ONLY



FSL124W
White



FSL124M
Matt Black

FAN LED LIGHT



FSL1243W
White



FSL1243M
Matt Black

FAN E27* LIGHT



FSL1244W
White



FSL1244M
Matt Black

ACCESSORIES



MDRA36W / MDRA72W
900mm / 1800mm Downrod
White



MDRA36M / MDRA72M
900mm / 1800mm Downrod
Matt Black




MPREMS
Premier Remote
Control Kit




MPLCDS
Premium Remote
Control Kit

DIMENSIONS


FAN ONLY

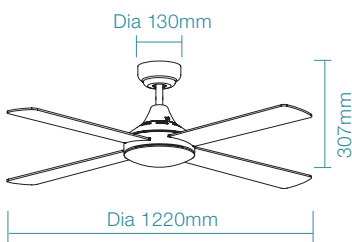

FAN LED LIGHT

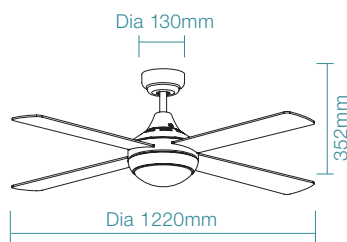

FAN E27* LIGHT

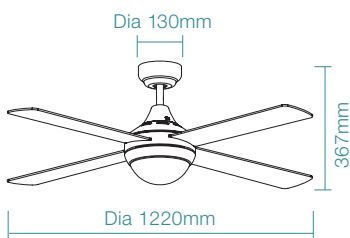

LIFESTYLE

Elegant and functional



Warranty



Indoor Use Only



Summer/Winter Reverse Function



Tricolour



3 Step Switch Dimming



E27

FEATURES

- Powerful and efficient 60W AC motor
- Low profile designed ideal for indoor applications
- Aluminium body, canopy and plywood blades (plus glass lens cover, light model only)
- Fully reversible for summer and winter mode
- 24W tricolour LED with 3 step switch dimming (light model only)
- Switchable colour temperature between 3000K, 4000K and 5000K (light model only)
- E27 light model available (globes not included)

SPECIFICATIONS

	Fan Only			Fan LED Light			Fan E27* Light		
Ordering Code	DLS134W	DLS134M	DLS134B	DLS1343W	DLS1343M	DLS1343B	DLS1344W	DLS1344M	DLS1344B
Colour	White	Matt Black	Brushed Aluminium	White	Matt Black	Brushed Aluminium	White	Matt Black	Brushed Aluminium
Power Wattage	60W			60W			60W		
Voltage	220-240Va.c. 50Hz			220-240Va.c. 50Hz			220-240Va.c. 50Hz		
Blade Diameter	1320mm (52")			1320mm (52")			1320mm (52")		
Air Movement m³/hr									
Speed 1 (Highest)	9,600m ³ /hr			9,600m ³ /hr			9,600m ³ /hr		
Speed 2	7,600m ³ /hr			7,600m ³ /hr			7,600m ³ /hr		
Speed 3 (Lowest)	5,600m ³ /hr			5,600m ³ /hr			5,600m ³ /hr		
Blade Pitch	12.5°			12.5°			12.5°		
Hangsure Canopy	Maximum 15°			Maximum 15°			Maximum 15°		
Lighting Wattage / Type	-			24W LED			-		
Colour Temperature	-			3000K / 4000K / 5000K			-		
Lumens Output	-			2180lm / 2560lm / 2470lm			-		
Rated Lifetime	-			35,000 hours @ Ta25°C			-		
Dimmable	-			3 step dimming			-		

*Supplied with 2x E27 lamp holders. Globe not included.



COLOUR AND VARIANTS

FAN ONLY



DLS134W
White



DLS134M
Matt Black



DLS134B
Brushed Aluminium

FAN LED LIGHT



DLS1343W
White



DLS1343M
Matt Black



DLS1343B
Brushed Aluminium

FAN E27* LIGHT



DLS1344W
White



DLS1344M
Matt Black



DLS1344B
Brushed Aluminium

ACCESSORIES



MDRA36W / MDRA72W
900mm / 1800mm Downrod
White



MDRA36M / MDRA72M
900mm / 1800mm Downrod
Matt Black



MDRA36B / MDRA72B
900mm / 1800mm Downrod
Brushed Aluminium




MPREMS
Premier Remote
Control Kit




MPLCDS
Premium Remote
Control Kit

DIMENSIONS



FAN ONLY

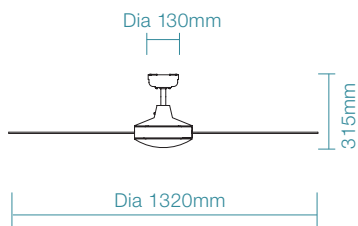

FAN LED LIGHT

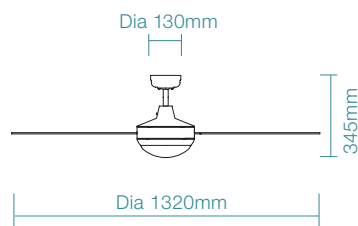

FAN E27* LIGHT

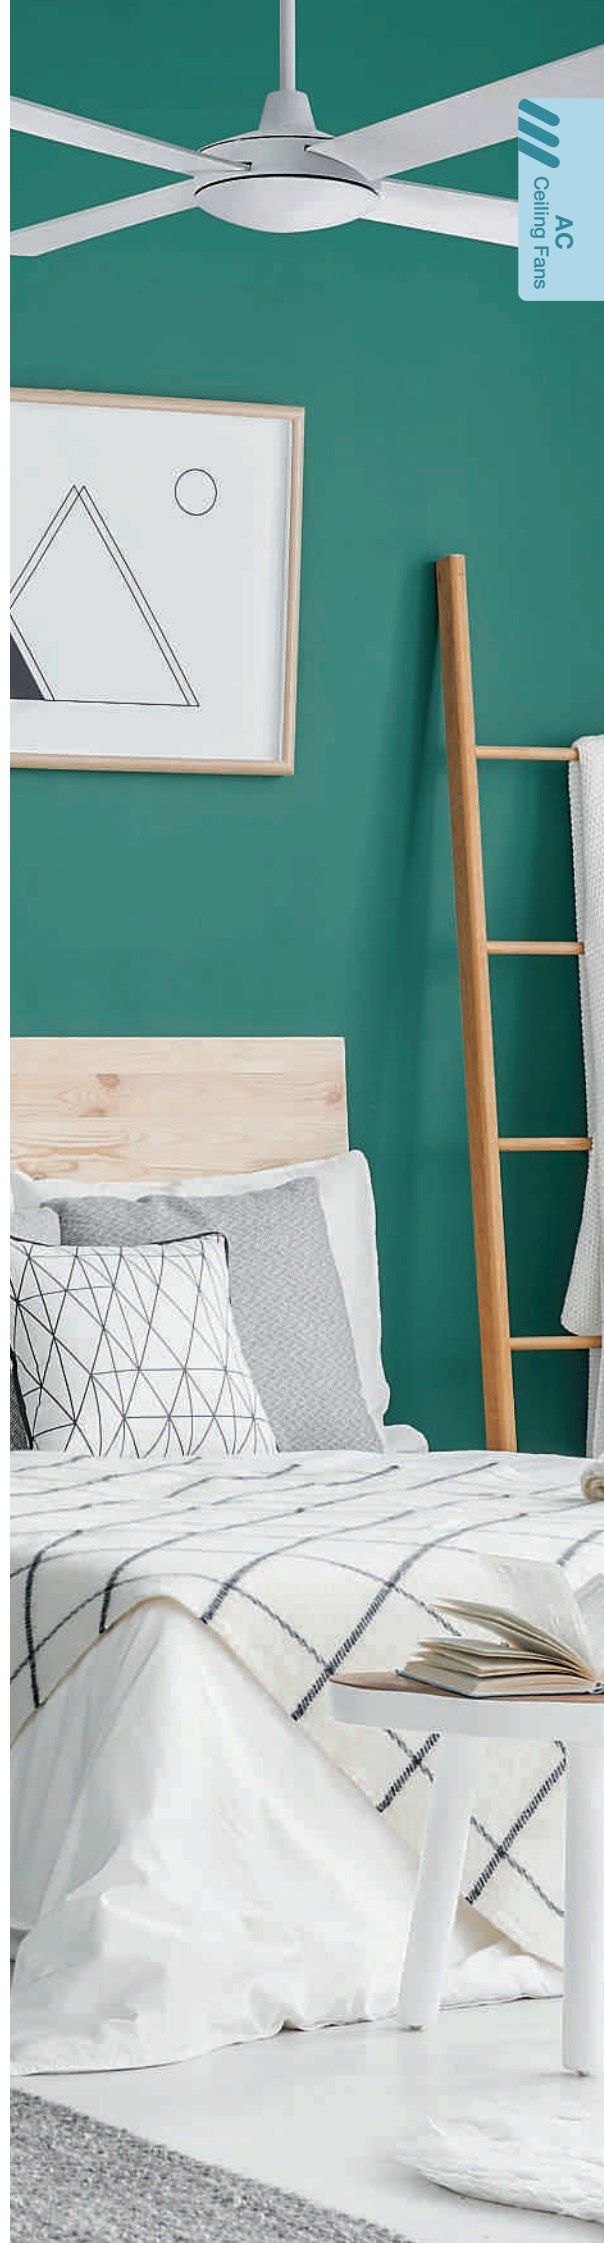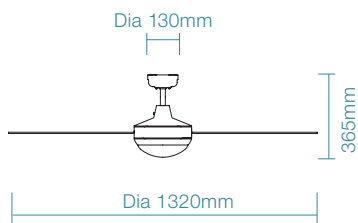

RAZOR

Robust and modern



Warranty



Indoor
Use Only



Summer/Winter
Reverse Function



Tricolour



3 Step Switch
Dimming

FEATURES

- Powerful and efficient 69W AC motor
- Slimline designed ideal for indoor applications
- Metal body, canopy and plywood blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode
- 15W tricolour LED with 3 step switch dimming (light model only)
- Switchable colour temperature between 3000K, 4000K and 5000K (light model only)

SPECIFICATIONS

	Fan Only		Fan LED Light
Ordering Code	MRF134W	MRF134M	MRF1343W
Colour	White	Matt Black	White
Power Wattage	69W		69W
Voltage	220-240Va.c. 50Hz		220-240Va.c. 50Hz
Blade Diameter	1320mm (52")		1320mm (52")
Air Movement m³/hr			
Speed 1 (Highest)	9,500m ³ /hr		9,500m ³ /hr
Speed 2	7,240m ³ /hr		7,240m ³ /hr
Speed 3 (Lowest)	5,055m ³ /hr		5,055m ³ /hr
Blade Pitch	12.5°		12.5°
Hangsare Canopy	Maximum 15°		Maximum 15°
Lighting Wattage / Type	-		28W LED
Colour Temperature	-		3000K / 4000K / 5000K
Lumens Output	-		3300lm / 3550lm / 3400lm
Rated Lifetime	-		35,000 hours @ Ta25°C
Dimmable	-		3 step dimming



COLOUR AND VARIANTS

FAN ONLY



MRF134W
White



MRF134M
Matt Black

FAN LED LIGHT



MRF1343W
White

ACCESSORIES



MDRA36W / MDRA72W
900mm / 1800mm Downrod
White



MDRA36M / MDRA72M
900mm / 1800mm Downrod
Matt Black




MPREMS
Premier Remote
Control Kit




MPLCDS
Premium Remote
Control Kit

DIMENSIONS

FAN ONLY

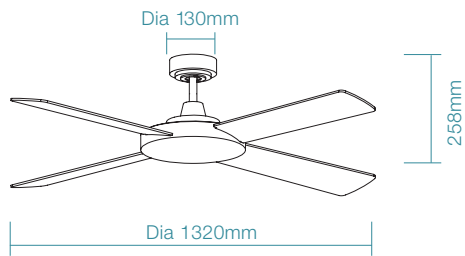

FAN LED LIGHT

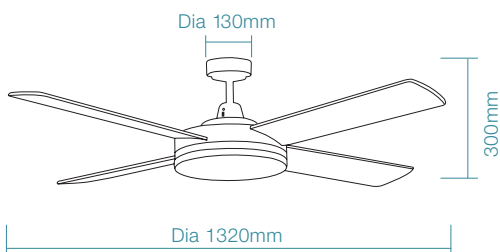

PRECISION

Coastal and tropical rated



Warranty



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



Tropical
Rated



Coastal
Rated

FEATURES

- Powerful and efficient 75W AC motor
- Ideal for indoor and covered outdoor and tropical applications
- All metal body, canopy and blades
- Fully reversible for summer and winter mode
- E14 light kit available (sold separately and globes not included)

SPECIFICATIONS

	Fan Only								
Ordering Code	MPF120WH	MPF3042SS	MPF3162SS	MPF130WH	MPF3043SS	MPF3163SS	MPF140WH	MPF3044SS	MPF3164SS
Colour	White	Brushed Nickel / 304	Stainless Steel / 316	White	Brushed Nickel / 304	Stainless Steel / 316	White	Brushed Nickel / 304	Stainless Steel / 316
Power Wattage	75W			75W			75W		
Voltage	220-240Va.c. 50Hz			220-240Va.c. 50Hz			220-240Va.c. 50Hz		
Blade Diameter	1220mm (48") 9,500m ³ /hr			1320mm (52")			1420mm (56")		
Air Movement m³/hr									
Speed 1 (Highest)	16,380m ³ /hr			18,960m ³ /hr			21,000m ³ /hr		
Speed 2	11,980m ³ /hr			13,050m ³ /hr			14,300m ³ /hr		
Speed 3 (Lowest)	8,450m ³ /hr			9,520m ³ /hr			9,380m ³ /hr		
Blade Pitch	23°			23°			23°		
Hangsure Canopy	Maximum 15°			Maximum 15°			Maximum 15°		
	Fan + Light Kit								
Ordering Code	MPF120WH + PLKWH*	MPF3042SS + PLKBN*	MPF3162SS + PLKSS*	MPF130WH + PLKWH*	MPF3043SS + PLKBN*	MPF3163SS + PLKSS*	MPF140WH + PLKWH*	MPF3044SS + PLKBN*	MPF3164SS + PLKSS*
Colour	White	Brushed Nickel / 304	Stainless Steel / 316	White	Brushed Nickel / 304	Stainless Steel / 316	White	Brushed Nickel / 304	Stainless Steel / 316
Power Wattage	75W			75W			75W		
Voltage	220-240Va.c. 50Hz			220-240Va.c. 50Hz			220-240Va.c. 50Hz		
Lighting Wattage / Type	2x E14** lamp holder								

*Light kit sold separately at additional cost.

**Globe not included



COLOUR AND VARIANTS

FAN ONLY



**MPF120WH / MPF130WH
MPF140WH**
White

**MPF3042SS / MPF3043SS
MPF3044SS**
Brushed Nickel / 304

**MPF3162SS / MPF3163SS
MPF3164SS**
Stainless Steel / 316

ACCESSORIES

LIGHT KIT*



PLKWH
White



PLKBN
Brushed Nickel / 304



PLKSS
Stainless Steel / 316



DREPO36W / DREPO72W
900mm / 1800mm Downrod
White



DREPO36BN / DREPO72BN
900mm / 1800mm Downrod
Brushed Nickel



DRP36SS / DRP72SS
900mm / 1800mm Downrod
Stainless Steel




MPREMS
Premier Remote
Control Kit




MPLCDS
Premium Remote
Control Kit

DIMENSIONS

FAN ONLY

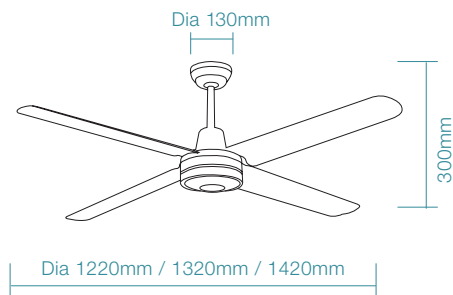

FAN LED LIGHT

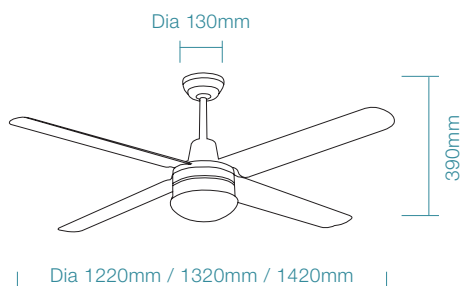

For more product information please visit our website.



GOVERNOR

Industrial look



6
YEAR



Indoor & Covered
Outdoor Use



Summer/Winter
Reverse Function



3000K 4000K
5000K

Tricolour



3 Step Switch
Dimming

FEATURES

- Powerful and efficient 70W AC motor
- Industrial look ideal for indoor and covered outdoor applications
- Metal body, canopy and ABS blades (plus PMMA lens cover, light model only)
- Fully reversible for summer and winter mode
- 15W tricolour LED with 3 step switch dimming (light model only)
- Switchable colour temperature between 3000K, 4000K and 5000K (light model only)

SPECIFICATIONS

	Fan Only	Fan LED Light
Ordering Code	MGF1530T	MGF15330T
Colour	Old Bronze / Teak	Old Bronze / Teak
Power Wattage	70W	70W
Volatge	220-240Va.c. 50Hz	220-240Va.c. 50Hz
Blade Diameter	1520mm (60")	1520mm (60")
Air Movement m³/hr		
Speed 1 (Highest)	11,400m ³ /hr	11,400m ³ /hr
Speed 2	10,220m ³ /hr	10,220m ³ /hr
Speed 3 (Lowest)	7,150m ³ /hr	7,150m ³ /hr
Blade Pitch	13°	13°
Hangsure Canopy	Maximum 15°	Maximum 15°
Lighting Wattage / Type	-	15W LED
Colour Temperature	-	3000K / 4000K / 5000K
Lumens Output	-	1510lm / 1760lm / 1720lm
Rated Lifetime	-	35,000 hours @ Ta25°C
Dimmable	-	3 step dimming



COLOUR AND VARIANTS

FAN ONLY



MGF1530T
Old Bronze / Teak

FAN LED LIGHT



MGF15330T
Old Bronze / Teak

ACCESSORIES



MDRA360 / MDRA720
900mm / 1800mm Downrod
Old Bronze




MPREMS
Premier Remote
Control Kit




MPLCDS
Premium Remote
Control Kit

DIMENSIONS

FAN ONLY

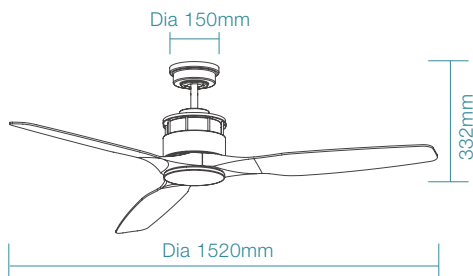

FAN LED LIGHT

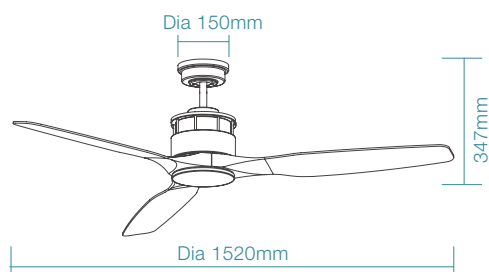





CEILING FANS ACCESSORIES

ADVANTAGES OF ACCESSORIES

Remote Control

Remote controls allow you to change the fan speed with a touch of a button.

Light

Ceiling fan lights give you brightness while providing a relaxing cool breeze.

Downrod

Downrods provide convenience and better efficiency where the installation area has a high ceiling.

Remote Control / Wall Controller	104
Downrods	106
Light Kits / Diffuser / Glass	108
Receiver / Transmitter	109
Blade Set / Base Plate	109

REMOTE CONTROL KITS / WALL CONTROLLER



PREMIER REMOTE CONTROL KIT

MPREMS

FEATURES

- 1 year in-home warranty
- Suitable for all AC ceiling fans
- 3 speed: high, medium and low
- Light on/off function
- 2, 4 and 8 hour timer
- 4 dip switches make 16 possible control channels
- Radio frequency with range up to 10m
- Supplied with 2x AAA batteries



PREMIUM LCD REMOTE CONTROL KIT

MPLCDS

FEATURES

- 1 year in-home warranty
- Suitable for all AC ceiling fans
- 3 speed: high, medium and low
- Light on/off function
- 1-8 hour timer
- 4 dip switches make 16 possible control channels
- Radio frequency with range up to 10m
- Supplied with 2x AAA batteries and wall mounting bracket



INFRA-RED REMOTE CONTROL KIT

FSIREM

FEATURES

- 1 year in-home warranty
- Suitable for all AC ceiling fans
- 3 speed: high, medium and low
- Light on/off and delay function
- Supplied with 2x AAA batteries




DOWNRODS

COLOUR



RECOMMENDED DOWNROD LENGTH

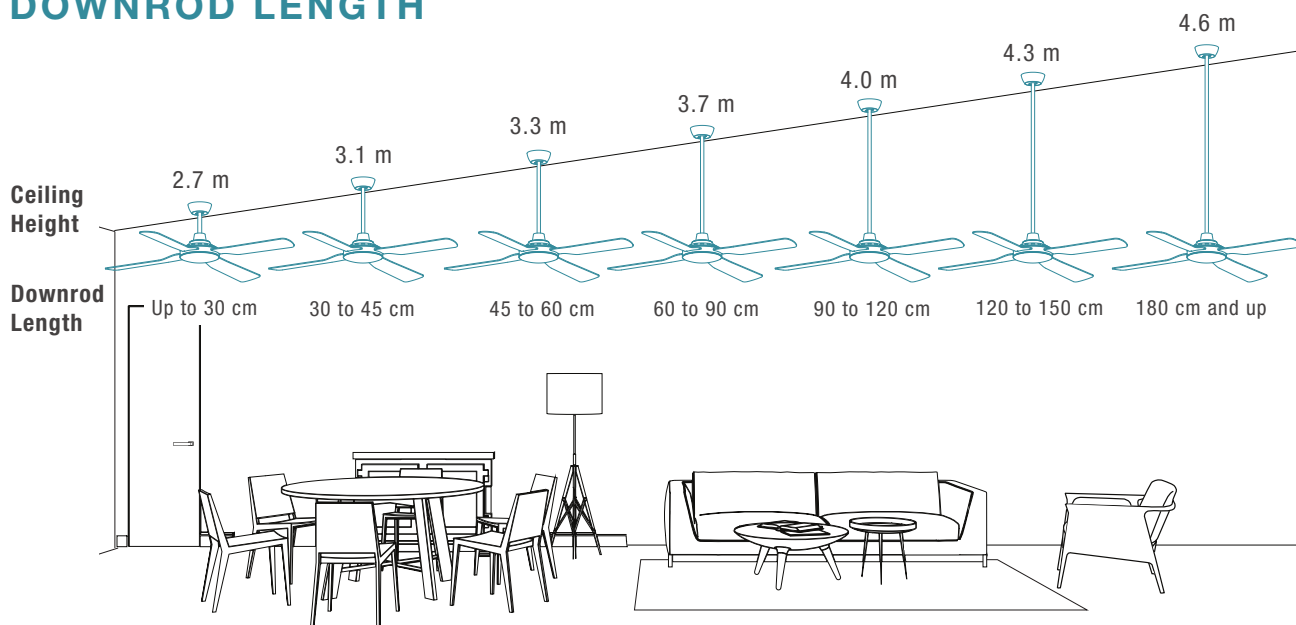

The ideal distance from the floor to fan blades is 210 cm to 270 cm.



DOWNRODS

VARIANTS

DC DOWNRODS

Ordering Code	Description	Product
MDRD36WS	900mm Downrod White Satin	All
MDRD36W	900mm Downrod White	All
MDRD36M	900mm Downrod Matt Black	All
MDRD36N	900mm Downrod Brushed Nickel	All
MDRD36B	900mm Downrod Brushed Aluminium	All
MDRD72WS	1800mm Downrod White Satin	All
MDRD72W	1800mm Downrod White	All
MDRD72M	1800mm Downrod Matt Black	All
MDRD72B	1800mm Downrod Brushed Aluminium	All
MDRDWIFI36W	900mm Downrod WiFi Matt White	NEW All Smart Range
MDRDWIFI36M	900mm Downrod WiFi Matt Black	NEW All Smart Range
MDRDWIFI36AB	900mm Downrod WiFi Antique Bronze	NEW Riviera
MDRDWIFI36OB	900mm Downrod WiFi Old Bronze	NEW Kingston
MDRDWIFI36G	900mm Downrod WiFi Graphite	NEW Scorpion
MDRDWIFI72W	1800mm Downrod WiFi Matt White	NEW All Smart Range
MDRDWIFI72M	1800mm Downrod WiFi Matt Black	NEW All Smart Range
MDRD36WST	900mm Downrod White Satin 25mm Dia	Newport
MDRD36OT	900mm Downrod Old Bronze 25mm Dia	Newport
MDRD36MT	900mm Downrod Matt Black 25mm Dia	Newport
MDRD72WST	1800mm Downrod White Satin 25mm Dia	Newport
MDRD72OT	1800mm Downrod Old Bronze 25mm Dia	Newport
MDRD72MT	1800mm Downrod Matt Black 25mm Dia	Newport

NB: Please select the colour that matches the corresponding ceiling fan colour.

AC DOWNRODS

Ordering Code	Description	Product
MDRA36WS	900mm Downrod White Satin	All
MDRA36W	900mm Downrod White	All
MDRA36O	900mm Downrod Old Bronze	All
MDRA36M	900mm Downrod Matt Black	All
MDRA72WS	1800mm Downrod White Satin	All
MDRA72W	1800mm Downrod White	All
MDRA72O	1800mm Downrod Old Bronze	All
MDRA72M	1800mm Downrod Matt Black	All
DREPO36W	900mm Downrod White	Precision
DREPO36BN	900mm Downrod Brushed Nickel	Precision
DRP36SS	900mm Downrod 316 Stainless Steel	Precision
DREPO72W	1800mm Downrod White	Precision
DREPO72BN	1800mm Downrod Brushed Nickel	Precision
DRP72SS	1800mm Downrod 316 Stainless Steel	Precision

NB: Please select the colour that matches the corresponding ceiling fan colour.

ACCESSORIES

LIGHT KIT

Ordering Code	Description
PLKBN	Light Kit to suit Precision AC Ceiling Fan Brushed Nickel/304
PLKSS	Light Kit to suit Precision AC Ceiling Fan Stainless Steel/316
PLKWH	Light Kit to suit Precision AC Ceiling Fan White
SPMDCMLKIT	LED Light Kit to suit Metro DC WiFi ceiling fan (no diffuser)
SPMEDCLKIT	LED Light Kit to suit Elite DC WiFi Ceiling Fan (no diffuser)
SPMLLAKIT345	LED Light Kit to suit Lifestyle DC and Albatross
SPMNDCLKITM	LED Light Kit to suit Norfolk DC WiFi Ceiling Fan Matt Black (no diffuser)
SPMNDCLKITW	LED Light Kit to suit Norfolk DC WiFi Ceiling Fan Matt White (no diffuser)
SPMRDCLKITA	LED Light Kit to suit Riviera DC WiFi Ceiling Fan Antique Bronze (no diffuser)
SPMRDCLKITM	LED Light Kit to suit Riviera DC WiFi Ceiling Fan Matt Black (no diffuser)
SPMRDCLKITW	LED Light Kit to suit Riviera DC WiFi Ceiling Fan Matt White (no diffuser)
SPMSDCLKITM	LED Light Kit to suit Scorpion DC WiFi Ceiling fan Matt Black (no diffuser)
SPMSDCLKITW	LED Light Kit to suit Scorpion DC WiFi Ceiling fan Matt White (no diffuser)
SPMVDCLKITM	LED Light Kit to suit Viper DC WiFi Ceiling Fan Matt Black (no diffuser)
SPMVDCLKITW	LED Light Kit to suit Viper DC WiFi Ceiling Fan Matt White (no diffuser)

REPLACEMENT DIFFUSER & GLASS

Ordering Code	Description
FSLEDIFF	Replacement PMMA Diffuser to Suit Link AC E27
MAFDIFF	Replacement Polycarb Diffuser to suit Albatross Ceiling Fan
MDFIIDIFF	Replacement Polycarb Diffuser to suit Discovery II Ceiling Fan
MGFDIFF	Replacement Polycarb Diffuser to suit Governor Ceiling Fan
MNDCDIFF	Replacement PMMA Diffuser to suit Norfolk DC WiFi ceiling fan
MNFDIFF	Replacement Diffuser to Suit Newport DC LED
MRDCDIFF	Replacement PMMA Diffuser to suit Riviera DC WiFi ceiling fan
MRFDIFF	Replacement PMMA Diffuser to suit Razor AC ceiling fans
MSDCDIFF	Replacement PMMA Diffuser to suit Scorpion DC WiFi ceiling fan
MVDCDIFF	Replacement PMMA Diffuser to suit Viper DC WiFi ceiling fan
MWFDIFF	Replacement Polycarb Diffuser to suit Wave Ceiling Fan
DLSEGLASS	Replacement Glass to Suit Lifestyle Ceiling Fan E27 / PLT
DLSGLASS	Replacement Glass to Suit Lifestyle Ceiling Fan Halogen / LED

RECEIVER

Ordering Code	Description
DCRECMFLT	Spare Receiver to suit Albatross Mini DC Fan with Light
SPACRECFSL	Spare Receiver to suit Link FSL AC fan with light
SPDCRECMADCLT	Spare Receiver to suit Avoca DC WiFi Ceiling Fan with Light 48" & 52"
SPDCRECMADCNL	Spare Receiver to suit Avoca DC WiFi Ceiling Fan with No Light 48" & 52"
SPDCRECMAFMLT	Spare Receiver to suit Albatross DC Remote Control Fan with Light
SPDCRECMAFMNL	Spare Receiver to suit Albatross DC Remote Control Fan with No Light
SPDCRECMAFNL	Spare Receiver to suit Albatross MINI DC Fan with No Light
SPDCRECMDCLT	Spare Receiver to suit Metro DC WiFi Ceiling Fan with Light
SPDCRECMDCNL	Spare Receiver to suit Metro DC WiFi Ceiling Fan No Light
SPDCRECMDCLT	Spare Receiver to suit Daytona IP55 DC WiFi Ceiling Fan with Light
SPDCRECMDCNL	Spare Receiver to suit Daytona IP55 DC WiFi Ceiling Fan with No Light
SPDCRECMDFLT	Spare Receiver to suit Metro DC Fan with Light
SPDCRECMDFNL	Spare Receiver to suit Metro DC Fan with No Light
SPDCRECMEDCLT	Spare Receiver to suit Elite DC WiFi Ceiling Fan with Light
SPDCRECMEDCNL	Spare Receiver to suit Elite DC WiFi Ceiling Fan NO Light
SPDCRECMMDCLT	Spare Receiver to suit Mallorca DC WiFi Ceiling Fan with Light
SPDCRECMMDCNL	Spare Receiver to suit Mallorca DC WiFi Ceiling Fan with No Light
SPDCRECMNDC12LT	Spare Receiver to suit Norfolk DC WiFi Ceiling Fan with Light 48"
SPDCRECMNDC12NL	Spare Receiver to suit Norfolk DC WiFi Ceiling Fan with No Light 48"
SPDCRECMNDC14LT	Spare Receiver to suit Norfolk DC WiFi Ceiling Fan with Light 56"
SPDCRECMNDC14NL	Spare Receiver to suit Norfolk DC WiFi Ceiling Fan with No Light 56"
SPDCRECMNDC22NL	Spare Receiver to suit Norfolk Aero DC WiFi Ceiling Fan 70" & 86"
SPDCRECMNFLT	Spare Receiver to suit Newport DC Fan with Light
SPDCRECMNFNL	Spare Receiver to suit Newport DC Fan without Light
SPDCRECMSDCLT	Spare Receiver to suit Scorpion DC WiFi Ceiling Fan with Light
SPDCRECMSDCNL	Spare Receiver to suit Scorpion DC WiFi Ceiling Fan with No Light
SPDCRECMVDCLT	Spare Receiver to suit Viper DC Fan with Light
SPDCRECMVDCNL	Spare Receiver to suit Viper DC Fan with No Light
SPDCRECMWFLT	Spare Receiver to suit Wave DC Fan with Light
SPDCRECMWFNL	Spare Receiver to suit Wave DC Fan with No Light
SPDCRECWIFILT	Spare Receiver to suit Avoca WiFi DC Fans with Light
SPDCRECWIFINL	Spare Receiver to suit Avoca WiFi DC Fans No Light
SPRECMRDCLT	Spare Receiver to suit Riviera DC WiFi Ceiling Fan with Light
SPRECMRDCNL	Spare Receiver to suit Riviera DC WiFi Ceiling Fan No Light

TRANSMITTER

Ordering Code	Description
SPACTRANSFSL	Spare Transmitter to suit Martec Link FSL AC Fan with Light
SPDCTRANSLT	Spare Transmitter to suit DC Fan with Light
SPDCTRANSNL	Spare Transmitter to suit DC Fan No Light
SPDCTRANSWIFILT	Spare Transmitter to suit WiFi DC Fans with Light
SPDCTRANSWIFINL	Spare Transmitter to suit WiFi DC Fans No Light
SPLKDR	Light Kit Driver for Razor

ACCESSORIES

BLADE SET

Ordering Code	Description
SPB13MRDCCH	Blade Set to suit Riviera DC 3 Blades Charcoal
SPB13MRDCM	Blade Set to suit Riviera DC 3 Blades Matt Black
SPB13MRDCW	Blade Set to suit Riviera DC 3 Blades Matt White
SPB133MVDCM	Blade Set to suit Viper DC 3 Blades Matt Black
SPB133MVDCW	Blade Set to suit Viper DC 3 Blades Matt White
SPB134MVDCM	Blade Set to suit Viper DC 4 Blades Matt Black
SPB134MVDCW	Blade Set to suit Viper DC 4 Blades Matt White
SPB133MADCLTW	Blade Set to suit Avoca DC 3 Blades Matt White
SPB133MADCNLO	Blade Set to suit Avoca DC 3 BladesOak
SPB133MADCNLW	Blade Set to suit Avoca DC 3 BladesMatt White
SPB13MDDCM	Blade Set to suit Daytona IP55 DC 3 Blades Matt Black

BASE PLATE

Ordering Code	Description
SPBPMRDCA	Base Plate to suit Riviera DCAntique Bronze
SPBPMRDCM	Base Plate to suit Riviera DC Matt Black
SPBPMRDCW	Base Plate to suit Riviera DC Matt White
SPBPMVDCM	Base Plate to suit Viper DC Matt Black
SPBPMVDCW	Base Plate to suit Viper DC Matt White
SPBPMSDCM	Base Plate to suit Scorpion DC Matt Black
SPBPMSDCW	Base Plate to suit Scorpion DC Matt White
SPBPMDDCM	Base Plate to suit Daytona IP55 DC Matt Black
SPBPMNDC22W	Base Plate to suit Norfolk AERO DC 1800mm and 2200mm
SPBPMNDCM	Base Plate to suit Norfolk DC Matt Black
SPBPMNDCW	Base Plate to suit Norfolk DC Matt White



Heating & Exhaust

Martec® Heating presents an expansive collection of bathroom heaters and accessories tailored to accommodate various bathroom sizes and applications.

Our diverse range includes everything from single heat lamp units to sleekly designed 3-in-1 heaters, offering instant heat solutions configurable with 1, 2, or 4 heat lamps, as well as tricolour LED lights.

With different IPX ratings and colour finishes available, our heaters seamlessly complement any design scheme and environment within your home, ensuring both style and functionality. Whether seeking simple warmth or multi-functional heating options, Martec® Heating provides versatile solutions to enhance your bathroom experience.

Martec® Exhaust delivers a versatile array of exhaust fans designed to accommodate bathrooms of any size and various other area applications.

Our exhaust fans boast diverse features including different sizes, IPX ratings, shapes, and tricolour LED light options, ensuring suitability for a wide range of environments.

Powered by high-performance ball bearing motors and equipped with superior blade designs, our exhaust fans offer maximum air extraction efficiency while operating quietly. Whether you seek optimal ventilation for your bathroom or other spaces, Martec® Exhaust provides reliable solutions that combine performance, durability, and whisper-quiet operation.

BATHROOM
HEATERS **114**

EXHAUST
FANS **138**

HEATING
ACCESSORIES **146**



BATHROOM HEATERS

Martec® bathroom heaters come in a wide variety of shapes and sizes, from a simple single heat lamp unit, to slimline designed 3-in-1 heaters.

Different IPX ratings and colour finishes enable our heaters to complement any design scheme and environment at your home.

Linear.....	116
Linear Mini	118
Vapour.....	120
Phoenix	122
Phoenix Mini.....	124
Aspire.....	126
Forme.....	128
Profile Panel	130
Profile Plus	132
Contour	134
Uno	136
Thermo.....	137

LINEAR PLUS



In-Home
Warranty



Ingress
Protection



Heat Tube



High Performance
Ball Bearing Motor



High
Extraction



Slimline
Fitting



Tricolour

FEATURES

- Sleek and low profile design to suit any bathroom application
- Metal housing with aluminium fascia
- Built in thermal overload protection
- Back draft stopper included
- Half heat function with improved airflow
- Cut-out template included
- Compatible with Martec bathroom remote MBHREM (not included)

SPECIFICATIONS

Ordering Code	MBHLP1000W
Colour	White
Air Extraction m³/hr	600m ³ /hr
Exhaust Fan Wattage	40W
Voltage / Frequency	220-240Va.c. 50Hz
Materials / Housing	Metal housing
Cutout Size	455 x 305mm
Decibel Rating	≤40dB
IP Rating	IPX2
Heating wattage / type	2x 500W R7s heat tube
Lighting wattage / type	4x 6W Tricolour GU10 LED globe
Colour Temperature	3000/4000/5000K
Lumens Output	2510lm
Minimum Ceiling Depth	210mm
Ducting Size	150mm
Accessories Included	1x 3m duct 2x clips for ducting 1x external grille 1x 3 gang switch wall controller






COLOUR AND VARIANTS



MBHL1000W
White

DIMENSIONS

MODEL

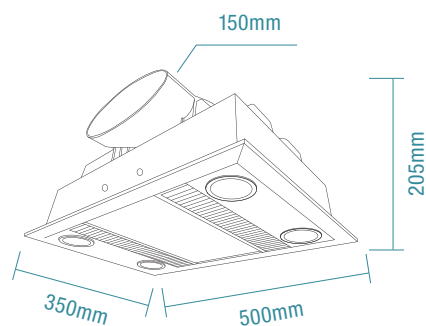

ACCESSORIES



MBHREM
Bathroom Heater
LCD Remote Control Kit



MRL500W
500W Heat Tube



MBGU34506
6W Globe Tricolour

LINEAR MINI PLUS



In-Home
Warranty



Ingress
Protection



Heat Tube



High Performance
Ball Bearing Motor



High
Extraction



Slimline
Fitting



Tricolour

FEATURES

- Sleek and low profile design to suit any bathroom application
- Metal housing with aluminium fascia
- Built in thermal overload protection
- Back draft stopper included
- Half heat function with improved airflow
- Cut-out template included
- Compatible with Martec bathroom remote MBHREM (not included)

SPECIFICATIONS

Ordering Code	MBHMP1000W
Colour	White
Air Extraction m³/hr	480m ³ /hr
Exhaust Fan Wattage	40W
Voltage / Frequency	220-240Va.c. 50Hz
Materials / Housing	Metal housing
Cutout Size	350 x 305mm
Decibel Rating	≤40dB
IP Rating	IPX2
Heating wattage / type	2x 500W R7s heat tube
Lighting wattage / type	3x 6W Tricolour GU10 LED globe
Colour Temperature	3000/4000/5000K
Lumens Output	1890lm
Minimum Ceiling Depth	220mm
Ducting Size	125mm
Accessories Included	1x 3m duct 2x clips for ducting 1x external grille 1x 3 gang switch wall controller






COLOUR AND VARIANTS



MBHM1000W
White

DIMENSIONS

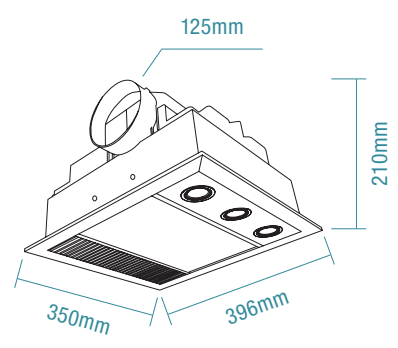

ACCESSORIES



MBHREM
Bathroom Heater
LCD Remote Control Kit




MRL500W
500W Heat Tube



MBGU34506
6W Globe Tricolour

VAPOUR

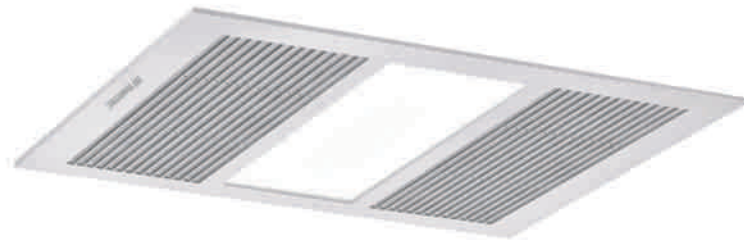

In-Home
Warranty



Ingress
Protection



Heat
Element



High Performance
Ball Bearing Motor



High
Extraction



Slimline
Fitting



Tricolour

FEATURES


- Sleek and low profile design to suit any bathroom application
- Metal housing with polycarbonate (PC) fascia
- Built in thermal overload protection
- Back draft stopper included
- Cut-out template included

SPECIFICATIONS

Ordering Code	MBHV2000W
Colour	White
Air Extraction m³/hr	380m ³ /hr
Exhaust Fan Wattage	55W
Voltage / Frequency	220-240Va.c. 50Hz
Materials / Housing	Metal housing
Cutout Size	520 x 345mm
Decibel Rating	≤40dB
IP Rating	IPX2
Heating wattage / type	2x 1000W PTC heat elements
Lighting wattage / type	12W LED
Colour Temperature	3000K / 4000K / 5000K
Lumens Output	900lm
Minimum Ceiling Depth	200mm
Ducting Size	150mm
Accessories Included	1x 3m duct 2x clips for ducting 1x external grille 1x 5 gang switch wall controller




COLOUR AND VARIANTS

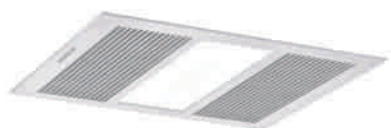

MBHV2000W
White

DIMENSIONS

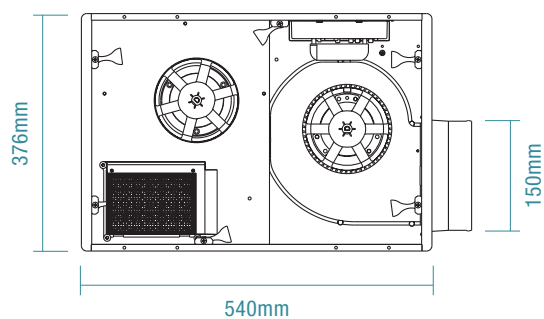

PHOENIX



2
YEAR
In-Home
Warranty



IPX2
Ingress
Protection



Heat Tube



High Performance
Ball Bearing Motor



High
Extraction



Slimline
Fitting



Tricolour

FEATURES

- Sleek and low profile design to suit any small to medium bathroom application
- Polypropylene (PP) housing with metal fascia
- Built in thermal overload protection
- Back draft stopper included
- Cut-out template included
- Compatible with Martec bathroom remote MBHREM (not included)

SPECIFICATIONS

Ordering Code	MBHP1000W	MBHP1000M
Colour	White	Black
Air Extraction m ³ /hr	500m ³ /hr	
Exhaust Fan Wattage	1100W	
Voltage / Frequency	220-240V a.c. 50Hz	
Materials / Housing	Polypropylene housing	
Cutout Size	475 x 325mm	
Decibel Rating	≤45dB	
IP Rating	IPX2	
Heating wattage / type	1x 1000W R7s heat tube	
Lighting wattage / type	20W LED	
Colour Temperature	3000K / 4000K / 5000K	
Lumens Output	1585lm / 1695lm / 1585lm	
Minimum Ceiling Depth	220mm	
Ducting Size	150mm	
Accessories Included	1x 1.5m duct 2x clips for ducting 1x external grille 1x 3 gang switch wall controller	



COLOUR AND VARIANTS




MBHP1000W
White



MBHP1000M
Black

DIMENSIONS

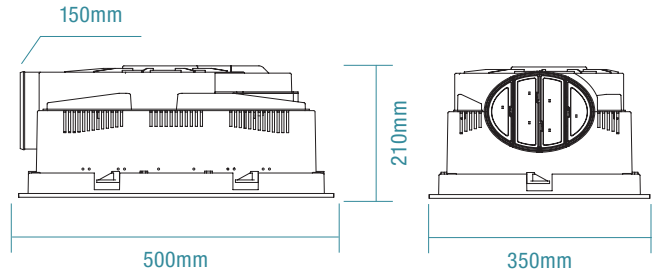

ACCESSORIES



MBHREM
Bathroom Heater LCD
Remote Control Kit



MRLP1000W
1000W Heat Tube

PHOENIX MINI



2
YEAR
In-Home
Warranty



IPX2
Ingress
Protection



420m³/hr
High Volume
Air Extraction



Heat Tube



Ball Bearing
Motor



Slimline
Fitting

FEATURES

- Sleek and low profile designed to suit any small to medium bathroom application
- 3-in-1 bathroom heater features tricolour LED panel with heat tube
- Built in thermal overload protection
- Polypropylene (PP) housing and metal fascia
- Back draft stopper included
- Cut-out template included
- Compatible with Martec bathroom remote MBHREM (not included)

SPECIFICATIONS

Ordering Code	MBHPM1000W	MBHPM1000M
Colour	White	Matt Black
Air Extraction m ³ /hr	420m ³ /hr	
Exhaust Fan Wattage	60W	
Voltage / Frequency	220-240V a.c. 50Hz	
Materials / Housing	Polypropylene housing	
Cutout Size	390 x 325mm	
Decibel Rating	≤40dB	
IP Rating	IPX2	
Heating wattage / type	1x 1000W R7s heat tube 238mm	
Lighting wattage / type	10W LED	
Colour Temperature	3000K / 4000K / 5000K	
Lumens Output	750lm / 800lm / 750lm	
Minimum Ceiling Depth	220mm	
Ducting Size	150mm	
Accessories Included	1x 1.5m duct 2x clips for ducting 1x external grille 1x 3 gang switch wall controller	



COLOUR AND VARIANTS




MBHPM1000W
White



MBHPM1000M
Matt Black

DIMENSIONS

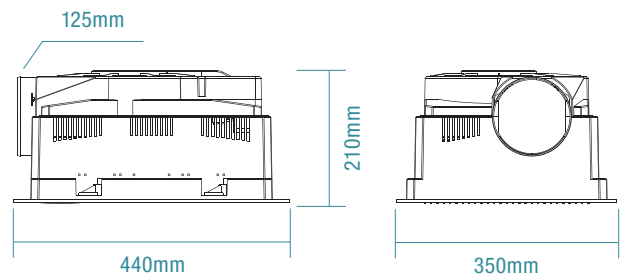

ACCESSORIES




MBHREM
Bathroom Heater LCD
Remote Control Kit



MRLP1000W
1000W Heat Tube

ASPIRE

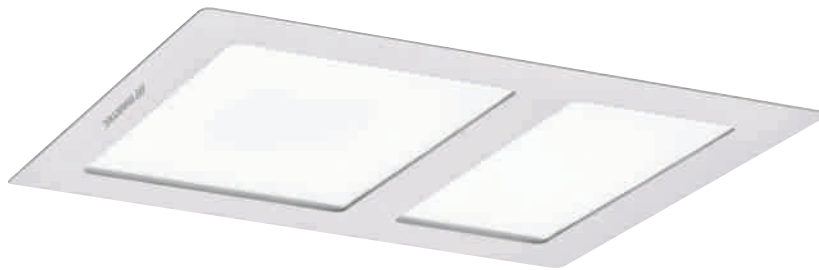

In-Home
Warranty



Ingress
Protection



Heat Tube



High Performance
Ball Bearing Motor



High
Extraction



Slimline
Fitting



Tricolour

FEATURES

- Sleek and low profile design to suit any bathroom application
- Metal housing with aluminium fascia
- Built in thermal overload protection
- Back draft stopper included
- Half heat function
- Cut-out template included
- Compatible with Martec bathroom remote MBHREM (not included)

SPECIFICATIONS

Ordering Code	MBHA800W
Colour	White
Air Extraction m³/hr	380m ³ /hr
Exhaust Fan Wattage	55W
Voltage / Frequency	220-240Va.c. 50Hz
Materials / Housing	Metal housing
Cutout Size	520 x 345mm
Decibel Rating	≤50dB
IP Rating	IPX2
Heating wattage / type	2x 400W heat tubes
Lighting wattage / type	20W LED
Colour Temperature	3000K / 4000K / 5000K
Lumens Output	1380lm / 1565lm / 1530lm
Minimum Ceiling Depth	200mm
Ducting Size	150mm
Accessories Included	1x 3m duct 2x clips for ducting 1x external grille 1x 4 gang switch wall controller




COLOUR AND VARIANTS



MBHA800W
White

DIMENSIONS

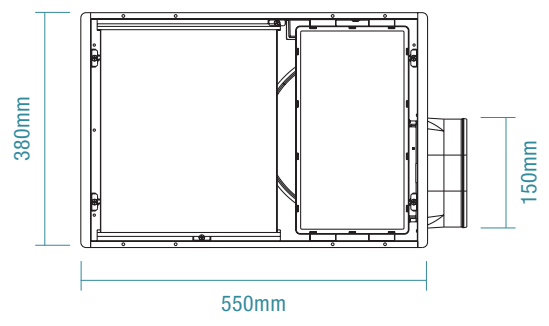

ACCESSORIES



MBHREM
Bathroom Heater LCD
Remote Control Kit



MRL400W
400W Heat Tube

FORME



In-Home
Warranty



Ingress
Protection



Heat Lamp



High Performance
Ball Bearing Motor



High
Extraction



Ultra Low
Profile



Tricolour

FEATURES

- Low profile design to suit any small to medium bathroom application
- Polypropylene (PP) housing with polycarbonate (PC) fascia
- Built in thermal overload protection
- Back draft stopper included
- Half heat function (4 heat unit only)
- Cut-out template included
- Compatible with Martec bathroom remote MBHREM (not included)

SPECIFICATIONS

Ordering Code	MBHF2LW	MBHF4LW
Colour	White	White
Air Extraction m ³ /hr	300m ³ /hr	
Exhaust Fan Wattage	45W	
Voltage / Frequency	220-240Va.c. 50Hz	
Materials / Housing	Polypropylene housing	
Cutout Size	375 x 202mm	320 x 320mm
Decibel Rating	≤40dB	
IP Rating	IPX4	
Heating wattage / type	2 x 275W heat lamps	4 x 275W heat lamps
Lighting wattage / type	10W LED	
Colour Temperature	3000K / 4000K / 5000K	
Lumens Output	600lm / 725lm / 700lm	
Minimum Ceiling Depth	200mm	
Ducting Size	125mm	
Accessories Included	1x 1.5m duct 2x clips for ducting 1x external grille 1x 3 gang switch wall controller 2x heat lamps	1x 1.5m duct 2x clips for ducting 1x external grille 1x 4 gang switch wall controller 4x heat lamps



COLOUR AND VARIANTS




MBHF2LW
White




MBHF4LW
White

DIMENSIONS

FORME 2

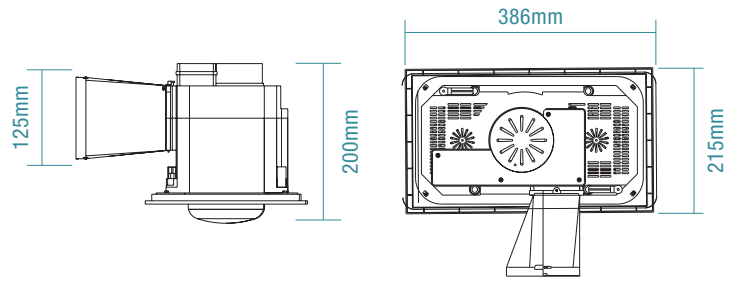

FORME 4

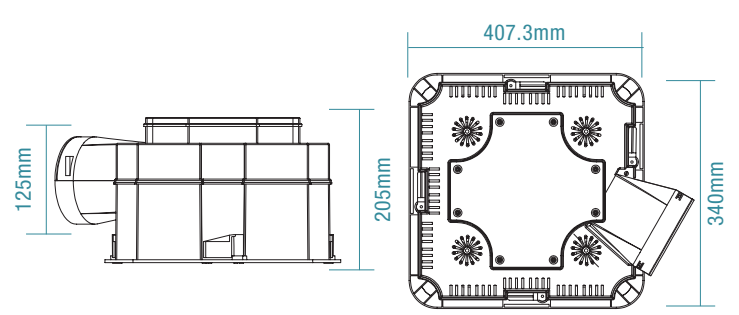

ACCESSORIES



MBHREM
Bathroom Heater LCD
Remote Control Kit



MRL275W
275W E27
Heat Lamp

PROFILE PANEL



2
YEAR
In-Home
Warranty



IPX2
Ingress
Protection



Heat Lamp



High Performance
Ball Bearing Motor



High
Extraction



Ultra Low
Profile



Tricolour

FEATURES

- Low profile design to suit any bathroom application
- Polypropylene (PP) housing with polycarbonate (PC) fascia
- Built in thermal overload protection
- Back draft stopper included
- Half heat function (4 heat unit only)
- Cut-out template included
- Compatible with Martec bathroom remote MBHREM (not included)

SPECIFICATIONS

Ordering Code	MBHN2LW	MBHN4LW
Colour	White	White
Air Extraction m ³ /hr	460m ³ /hr	
Exhaust Fan Wattage	602W	
Voltage / Frequency	220-240Va.c. 50Hz	
Materials / Housing	Polypropylene housing	
Cutout Size	435 x 255mm	435 x 275mm
Decibel Rating	≤50dB	
IP Rating	IPX2	
Heating wattage / type	2 x 275W heat lamps	4 x 275W heat lamps
Lighting wattage / type	12W LED	
Colour Temperature	3000K / 4000K / 5000K	
Lumens Output	850lm / 900lm / 950lm	
Minimum Ceiling Depth	220mm	
Ducting Size	120mm	
Accessories Included	1x 3m duct 2x clips for ducting 1x external grille 1x 3 gang switch wall controller 2x heat lamps	1x 3m duct 2x clips for ducting 1x external grille 1 x 4 gang switch wall controller 4x heat lamps



COLOUR AND VARIANTS



MBHN2LW
White



MBHN4LW
White

ACCESSORIES




MBHREM
Bathroom Heater LCD
Remote Control Kit




MRL275W
275W E27
Heat Lamp

DIMENSIONS

PROFILE PANEL 2

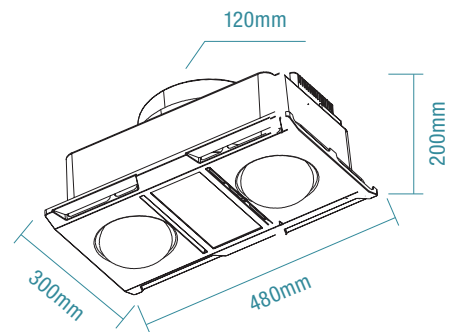

PROFILE PANEL 4

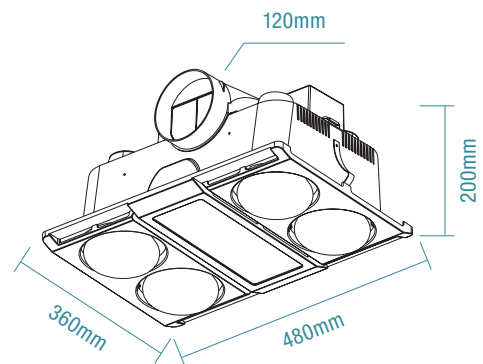

PROFILE PLUS



In-Home
Warranty



Ingress
Protection



Heat Lamp



High Performance
Ball Bearing Motor



High
Extraction



Ultra Low
Profile

FEATURES

- Low profile design to suit any bathroom application
- Polypropylene (PP) housing with polycarbonate (PC) fascia
- Built in thermal overload protection
- Back draft stopper included
- Half heat function (4 heat unit only)
- Cut-out template included
- Compatible with Martec bathroom remote MBHREM (not included)

SPECIFICATIONS

Ordering Code	MBHP2LW	MBHP4LW
Colour	White	White
Air Extraction m³/hr	460m ³ /hr	
Exhaust Fan Wattage	602W	
Voltage / Frequency	220-240V.a.c. 50Hz	
Materials / Housing	Polypropylene housing	
Cutout Size	435 x 255mm	435 x 275mm
Decibel Rating	≤50dB	
IP Rating	IPX2	
Heating wattage / type	2 x 275W heat lamps	4 x 275W heat lamps
Lighting wattage / type	3X 6W GU10	4X 6W GU10
Colour Temperature	3000K	
Lumens Output	1080lm	
Minimum Ceiling Depth	220mm	
Ducting Size	120mm	
Accessories Included	1x 3m duct 2x clips for ducting 1x external grille 1 x 3 gang switch wall controller 2x heat lamps	1x 3m duct 2x clips for ducting 1x external grille 1 x 4 gang switch wall controller 4x heat lamps

COLOUR AND VARIANTS



MBHP2LW
White



MBHP4LW
White



ACCESSORIES



MBHREM
Bathroom Heater LCD
Remote Control Kit




MRL275W
275W E27
Heat Lamp




MBGU306
6W GU10
Globe 3K

DIMENSIONS

PROFILE PLUS 2

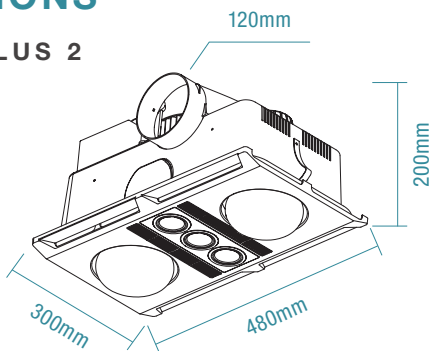

PROFILE PLUS 4

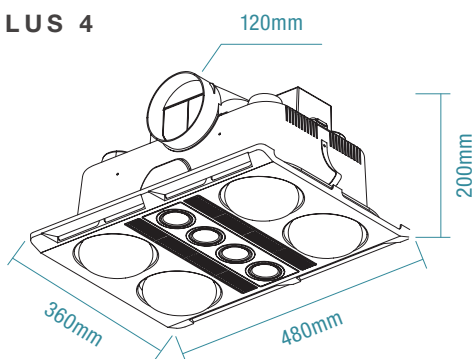

CONTOUR



In-Home
Warranty



Ingress
Protection



Heat Lamp



High Performance
Ball Bearing Motor



High
Extraction

FEATURES

- Modern design to suit any small to medium bathroom application
- Polypropylene (PP) housing with polycarbonate (PC) fascia
- Built in thermal overload protection
- Back draft stopper included
- Half heat function (4 heat unit only)
- Cut-out template included
- Compatible with Martec bathroom remote MBHREM (not included)

SPECIFICATIONS

Ordering Code	MBHC1LW	MBHC2LW	MBHC4LW
Colour	White	White	White
Air Extraction m ³ /hr	-	240m ³ /hr	250m ³ /hr
Exhaust Fan Wattage	-	25W	25W
Voltage / Frequency	220-240V a.c. 50Hz		
Materials / Housing	Polypropylene housing		
Cutout Size	166 x 166mm	390 x 220mm	300 x 300mm
Decibel Rating	≤40dB		
IP Rating	IPX4		
Heating wattage / type	1 x 275W heat lamp	2 x 275W heat lamps	4 x 275W heat lamps
Lighting wattage / type	-	8W R80 E27 LED	8W R80 E27 LED
Colour Temperature	-	3000K	3000K
Lumens Output	-	800lm	800lm
Minimum Ceiling Depth	220mm	220mm	220mm
Ducting Size	-	100mm	100mm
Accessories Included	1x external grille Single switch wall controller 1x heat lamp	1x 1.5m duct 2x clips for ducting 1x external grille 1 x 3 gang switch wall controller 2x heat lamps	1x 1.5m duct 2x clips for ducting 1x external grille 1x 4 gang switch wall controller 4x heat lamps

COLOUR AND VARIANTS



MBHC1LW
White



MBHC2LW
White



MBHC4LW
White

ACCESSORIES



MBHREM
Bathroom Heater LCD
Remote Control Kit




MRL275W
275W E27
Heat Lamp




MRL3K8W
8W 3000k
LED R80 Lamp

DIMENSIONS


CONTOUR 1

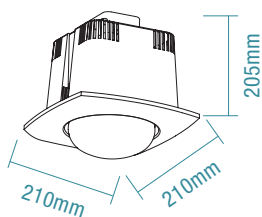

CONTOUR 2

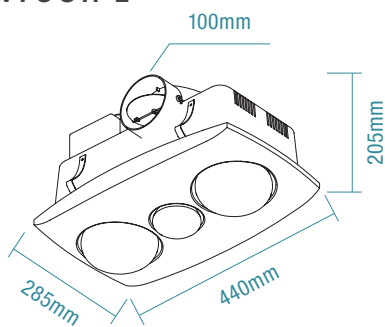

CONTOUR 4

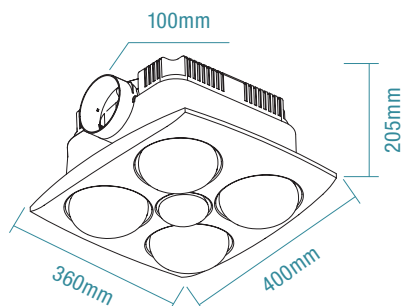

UNO



In-Home
Warranty



Ingress
Protection



Heat Lamp



Slimline
Fitting

FEATURES

- Slimline profile ideal for installation in ensuites and small bathrooms
- Provides powerful instant heating
- Aluminium housing with metal fascia trim
- Non dimmable

SPECIFICATIONS


Ordering Code	MBHU1LW
Colour	White
Air Extraction m³/hr	-
Exhaust Fan Wattage	275W
Voltage / Frequency	220-240Va.c. 50Hz
Materials / Housing	Aluminium housing
Cutout Size	Dia 145mm
Decibel Rating	TBA
IP Rating	IPX4
Heating wattage / type	1x 275W heat lamp
Lighting wattage / type	1x 275W heat lamp
Colour Temperature	2700K
Lumens Output	1200lm
Minimum Ceiling Depth	300mm
Accessories Included	1x heat lamp

COLOUR AND VARIANTS



MBHU1LW
White

DIMENSIONS

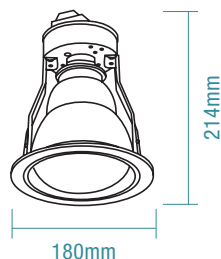

ACCESSORIES



MRL275W
275W E27
Heat Lamp



THERMO



1 YEAR
Replacement
Warranty



IPX0
Ingress
Protection



100%
50%
Heat
Setting



DIY
Installation



Class II

FEATURES

- Sleek and compact wall mount bathroom fan heater
- Ideal for installation in ensuites and small bathrooms
- Touchscreen control with 2 settings (1000W & 2000W)
- LED temperature display with touch on/off control
- Built in overload protection
- Supplied with 1.5M flex & plug

SPECIFICATIONS


Ordering Code	MBHT2000W
Colour	White
Air Extraction m³/hr	-
Exhaust Fan Wattage	35W
Voltage / Frequency	220-240Va.c. 50Hz
Materials / Housing	Heat resistance plastic
Cutout Size	N/A - wall mounted
Decibel Rating	≤38
IP Rating	IPX0
Heating wattage / type	Fan only with 2 settings 1000W / 2000W
Accessories Included	1.5m flex & plug

COLOUR AND VARIANTS



MBHT2000W
White

DIMENSIONS

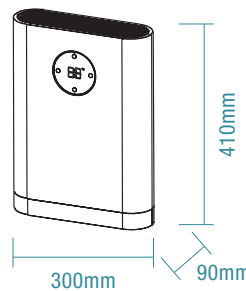



EXHAUST FANS

Martec® exhaust fans are available in a range of different shapes and sizes, as well as IPX ratings and tricolour LED light options. Our exhaust fans are operated by high performance ball bearing motors with superior blade design for maximum air extraction meaning quiet operation. Plus, they are always supplied with flex and plug making installation even easier.

Flow 240 / 295	140
Saturn 240 / 295	142
Core 240 / 290	144

FLOW 240 / 295



FEATURES

- Low profile design ideal for installation in bathroom, laundry and any residential and apartments applications
- Swivel quick mount base for easy installation
- PP plastic housing with ABS fascia (Flow 240), ABS plastic housing with ABS fascia (Flow 295)
- Built in thermal overload protection
- Side ducting access with draft stopper included
- Compatible with Martec bathroom remote MBHREM (not included)
- DIY installation only applicable to exhaust fan models only. Exhaust fan LED models need to be installed by licensed electricians.

SPECIFICATIONS

	*Exhaust Fan Only				**Exhaust Fan LED			
Ordering Code	MXFFR25W	MXFFR30W	MXFFS25W	MXFFS30W	MXFLFR25W	MXFLFR30W	MXFLFS25W	MXFLFS30W
Colour	White	White	White	White	White	White	White	White
Shape / Sizes	Round 240	Round 295	Square 240	Square 295	Round 240	Round 295	Square 240	Square 295
Air Extraction m ³ /hr	390m ³ /hr	600m ³ /hr	390m ³ /hr	600m ³ /hr	390m ³ /hr	600m ³ /hr	390m ³ /hr	600m ³ /hr
Exhaust Fan Wattage	45W	60W	45W	60W	45W	72W	45W	72W
Voltage / Frequency	220-240Va.c. 50Hz				220-240Va.c. 50Hz			
Materials / Housing	PP plastic housing				ABS plastic housing			
Cutout Size	240mm	295mm	240mm	295mm	240mm	295mm	240mm	295mm
Decibel Rating	≤40dB				≤40dB			
IP Rating	IPX2				IPX2			
Lighting wattage / type	-				12W LED			
Colour Temperature	-				3000K / 4000K / 5000K			
Lumens Output	-				950lm / 1000lm / 950lm			
Minimum Ceiling Depth	210mm	240mm	210mm	240mm	210mm	240mm	210mm	240mm
Ducting Size	125mm	150mm	125mm	150mm	125mm	150mm	125mm	150mm
Accessories Included	1.5m flex & plug				-			



COLOUR AND VARIANTS

*EXHAUST FAN ONLY



MXFFR25W
White



MXFFR30W
White



MXFFS25W
White



MXFFS30W
White

**EXHAUST FAN LED



MXFLFR25W
White



MXFLFR30W
White




MXFLFS25W
White



MXFLFS30W
White


DIMENSIONS

ROUND 240 / SQUARE 240 /
ROUND 240 LED / SQUARE 240 LED

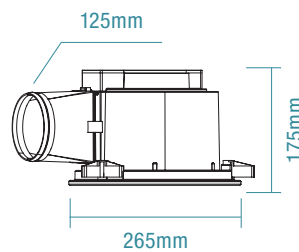

NB: Oval shape ducting pipe

ROUND 295 / SQUARE 295 /
ROUND 295 LED / SQUARE 295 LED

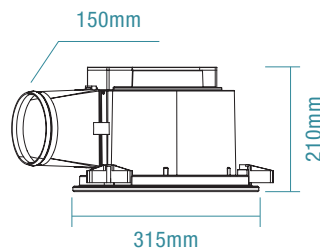

SATURN 240 / 295



FEATURES

- Low profile design ideal for installation in bathroom, laundry and any residential and apartments applications
- Plastic with white fascia plate
- Easy installation clamps to fit and secure fan into ceiling
- High velocity exhaust fan with back draft stopper
- Compatible with Martec bathroom remote MBHREM (not included)
- DIY installation only applicable to exhaust fan models only. Exhaust fan LED models need to be installed by licensed electricians.

SPECIFICATIONS

	*Exhaust Fan Only				**Exhaust Fan LED			
Ordering Code	MXFSR20W	MXFSR25W	MXFSS20W	MXFSS25W	MXFSLR20W	MXFSLR25W	MXFSLR20M	MXFSLR25M
Colour	Matt White	Matt White	White	White	Matt White	Matt White	Matt Black	Matt Black
Shape / Sizes	Round 240	Round 295	Square 240	Square 295	Round 240	Round 295	Round 240	Round 295
Air Extraction m ³ /hr	180m ³ /hr	320m ³ /hr	180m ³ /hr	320m ³ /hr	180m ³ /hr	443m ³ /hr	180m ³ /hr	443m ³ /hr
Exhaust Fan Wattage	25W	28W	25W	28W	25W	45W	25W	45W
Voltage / Frequency	220-240Va.c. 50Hz				220-240Va.c. 50Hz			
Materials / Housing	Plastic				Plastic			
Cutout Size	240mm	295mm	240mm	295mm	240mm	295mm	240mm	295mm
Decibel Rating	≤45dB				≤45dB			
IP Rating	IPX4				IPX4			
Lighting wattage / type	-				17W LED			
Colour Temperature	-				3000K / 4000K / 5000K			
Lumens Output	-				1200lm / 1400lm / 1200lm		900lm / 1050lm / 900lm	
Minimum Ceiling Depth	220mm				220mm			
Ducting Size	100mm	150mm	100mm	150mm	100mm	150mm	100mm	150mm
Accessories Included	900mm flex & plug				900mm flex & plug			



COLOUR AND VARIANTS

*EXHAUST FAN ONLY



MXFSR20W
Matt White



MXFSR25W
Matt White



MXFSS20W
White



MXFSS25W
White

**EXHAUST FAN LED



MXFSLR20W
Matt White



MXFSLR25W
Matt White




MXFSLR20M
Matt Black




MXFSLR25M
Matt Black

DIMENSIONS


ROUND 240

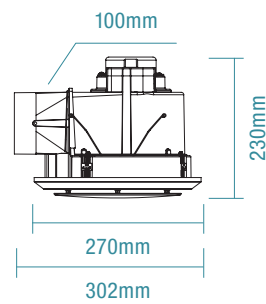


ROUND 295

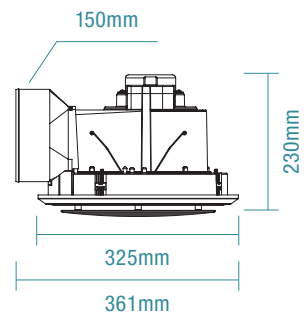


SQUARE 240

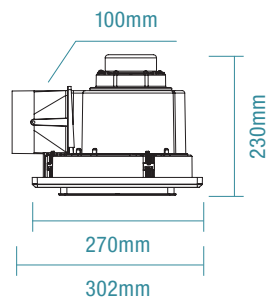


SQUARE 295

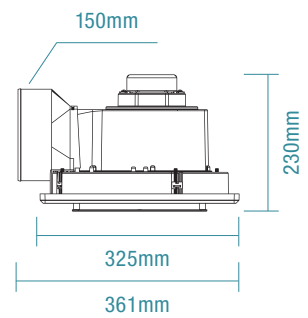

ROUND 240 LED

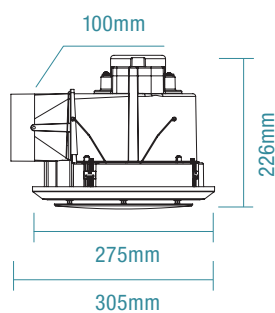

ROUND 295 LED

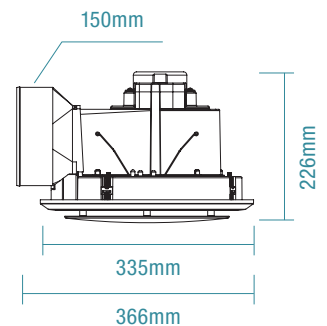

CORE 240 / 290



FEATURES

- Traditional design exhaust fan
- High air extraction
- DIY flex and plug supplied for easy installation

COLOUR AND VARIANTS



MXFC20W
White




MXFC25W
White

SPECIFICATIONS


	Exhaust Fan Only	
Ordering Code	MXFC20W	MXFC25W
Colour	White	White
Shape / Sizes	Round 240	Round 290
Air Extraction m³/hr	310m ³ /hr	540m ³ /hr
Exhaust Fan Wattage	25W	35W
Voltage / Frequency	220-240Va.c. 50Hz	
Materials / Housing	Plastic	
Cutout Size	240mm	290mm
Decibel Rating	≤40dB	≤50dB
IP Rating	IPX2	
Minimum Ceiling Depth	220mm	
Ducting Size	100mm	150mm
Accessories Included	1m flex & plug	

DIMENSIONS

ROUND 240

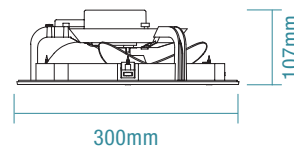

ROUND 290

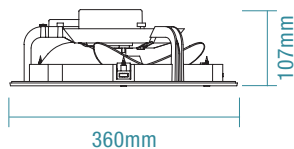

BATHROOM HEATER & EXHAUST FAN CALCULATOR

Note: This calculator is a guide only. It does not constitute specific advice from the Martec® team. You should always check your local building codes and requirements before having a new bathroom heater and exhaust fan installed.



This calculator can be accessed via our website
<https://www.martecaustralia.com.au/exhaust-fan-calculator/>

STEP 1:

Select installation location

Step 1: Select Installation Location

✓ Bathroom
Laundry
Utility Room

Your room size in m3 From (m3/hr) To (m3/hr)

0.00 m3 0.00 m3/hr 0.00 m3/hr

STEP 2:

Enter your room size

Step 1: Select Installation Location

Bathroom

Enter your room width (m) Enter your room length (m) Enter your room height (m)

3 4 2.4

Your room size in m3 From (m3/hr) To (m3/hr)

29 m3 432 m3 576 m3

STEP 3:

Product suggestions based on your room size entered







HEATING ACCESSORIES

.....

Martec® offers a range of accessories that are fully compatible with our heating and exhaust fan products. Check them out on our website: martecaustralia.com.au

.....

Remote Control Kit.....	148
Lamps	149

REMOTE CONTROL KIT



BATHROOM HEATER LCD REMOTE CONTROL KIT

MBHREM

FEATURES

- 1 year in-home warranty
- Easy to use LCD screen
- Frequency range up to 30m with multiple units installed in the same house
- Power capacity up to 1900W
- Compatible with Martec® 2 heat and 4 heat bathroom heaters
- Compatible with Martec® Linear and Aspire bathroom heaters
- Supplied with 9 volt battery
- Full or half heat function on 4 heat unit only



LAMPS



MRL400W



MRL500W



MRLP1000W



MBGU306



MBGU506



MGU34506



MRL3K8W



MRL275W

Ordering Code	Description
MRL400W	400W heat tube (for Aspire use only)
MRL500W	500W heat tube (for Linear Plus and Linear Mini Plus use only)
MRLP1000W	1000W heat tube (for Phoenix & Phoenix Mini use Only)
MBGU306	6W GU10 globe 3000K
MBGU506	6W GU10 globe 5000K
MGU34506	6W GU10 Globe Tricolour (3000K-5000K)
MRL3K8W	8W R80 LED lamp 3000K
MRL275W	275W E27 heat lamp

Lighting

Martec® Lighting provides a comprehensive selection of LED products encompassing downlights, surface mounted fittings, and exterior lighting solutions.

With a focus on versatility and functionality, our downlights and surface mounted fixtures offer switchable colour temperature options and dimming capabilities, compatible with Martec® dimmers for customizable ambience.

Our exterior lighting range boasts varying ingress protection ratings and includes built-in motion sensor options, ensuring security and safety in diverse outdoor settings. Whether for smaller-scale projects or larger installations, Martec® Lighting accommodates budgets and specifications, delivering quality illumination solutions tailored to individual needs.

DOWNLIGHTS **152**

SURFACE MOUNTED LIGHTING **170**

- OYSTER LIGHTS **170**

- BATTENS **178**

NEW
EXTERIOR LIGHTING **188**

- WALL LIGHTS **188**

- DECORATIVE LIGHTS **198**

- STEP LIGHTS **204**

- SPOT LIGHTS **212**

- SECURITY LIGHTS **218**

- FLOODLIGHTS & BUNKER **228**

EMERGENCY LIGHTING **234**

LIGHTING ACCESSORIES **235**

- DIMMERS

- LAMPS





DOWNLIGHTS

Downlights are a well known and flexible lighting option, they are versatile and easy to fit. The primary purpose of a downlight is to provide functional ambient light and to ensure a room is illuminated well.

Martec® offers a range of downlights with switchable wattage and colour temperatures to suit your application needs. Dimming options are available using Martec dimmers to create mood lighting.

Rex.....	154
Class II	156
Arte	158
Ultra	160
Prime.....	161
Titan II	162
Blitz II.....	163
Niko	164
Vito.....	165
Discus	166
Zone.....	167
Kobi	168

REX



FEATURES

- Modern designed with recessed reflector
- ABS plastic housing with recessed reflector and integral driver
- Ideal for residential, apartments and internal applications
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature 3000K, 4000K and 5000K
- Compatible with Martec® lighting dimmer MTD350VAP and MTD350VAR (sold separately)

SPECIFICATIONS

Rex		
Ordering Code	TLRD3459WD	TLRD3459MD
Colour	Matt White	Matt Black
Power Wattage	9W	
Voltage	220-240Va.c. 50Hz	
Materials / Housing	ABS Plastic housing	
Cutout Size	Dia 90mm	
Colour Temperature	3000K / 4000K / 5000K	3000K / 4000K / 5000K
Lumens Output	800lm / 820lm / 850lm	700lm / 750lm / 780lm
IP Rating	IP44 (Front Only)	
Beam Angle	60°	
CRI	Ra>80	
Rated Lifetime	30,000 hours @ Ta25°C	
Dimmable	Yes	
Flex and Plug	1M flex and plug	



COLOUR AND VARIANTS




TLRD3459WD
Matt White



TLRD3459MD
Matt Black

DIMENSIONS

REX

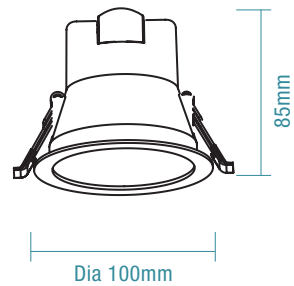

ACCESSORIES



MTD350VAP
Push Button Dimmer



MTD350VAR
Rotary Dimmer

CLASS II



FEATURES

- Low glare and aesthetically designed
- Aluminium housing with recessed reflector and integral driver
- Ideal for residential, apartments and internal applications
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature 3000K, 4000K and 5000K
- Compatible with Martec® lighting dimmer MTD350VAP and MTD350VAR (sold separately)

SPECIFICATIONS

Ordering Code	TLCD34510WD	TLCD34510MD
Colour	Matt White	Matt Black
Power Wattage	10W	
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Aluminium housing	
Cutout Size	Dia 90mm	
Colour Temperature	3000K / 4000K / 5000K	3000K / 4000K / 5000K
Lumens Output	750lm / 800lm / 830lm	700lm / 750lm / 780lm
IP Rating	IP44 (Front Only)	
Beam Angle	50°	
CRI	Ra>80	
Rated Lifetime	40,000 hours @ Ta25°	
Dimmable	Yes	
Flex and Plug	1M flex and plug	



COLOUR AND VARIANTS




TLCD34510WD
Matt White



TLCD34510MD
Matt Black

DIMENSIONS

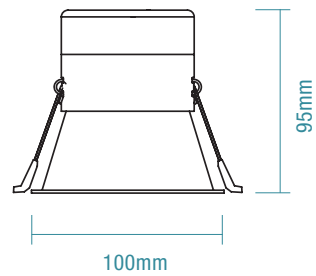

ACCESSORIES



MTD350VAP
Push Button Dimmer



MTD350VAR
Rotary Dimmer

ARTE



FEATURES

- Low glare fixed or adjustable downlight
- Aluminium housing with polycarbonate diffuser and remote driver
- Ideal for residential, apartments and internal applications
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature 3000K, 4000K and 5000K
- Compatible with Martec® lighting dimmer MTD350VAP and MTD350VAR (sold separately)

SPECIFICATIONS

	Arte	Arte Gimbal	Arte Mini
Ordering Code	TLAD34510WD	TLAG34510WD	TLAM34510WD
Colour	Matt White	Matt White	Matt White
Power Wattage	10W	10W	8W
Voltage		220-240Va.c. 50Hz	
Materials / Housing		Aluminium housing	
Cutout Size		Dia 90mm	Dia 70mm
Colour Temperature	3000K / 4000K / 5000K	3000K / 4000K / 5000K	3000K / 4000K / 5000K
Lumens Output	850lm / 900lm / 990lm	850lm / 900lm / 990lm	600lm / 670lm / 700lm
IP Rating		IP44 (Front Only)	
Beam Angle		100°	
CRI		Ra>80	
Rated Lifetime		50,000 hours @ Ta25°	
Dimmable		Yes	
Flex and Plug		1M flex and plug	



COLOUR AND VARIANTS



TLAD34510WD
Matt White



TLAG34510WD
Matt White



TLAM34510WD
Matt White

ACCESSORIES




MTD350VAP
Push Button Dimmer




MTD350VAR
Rotary Dimmer

DIMENSIONS


ARTE

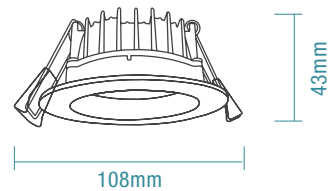

ARTE GIMBAL

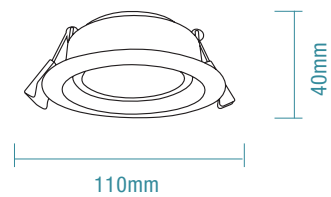

ARTE MINI

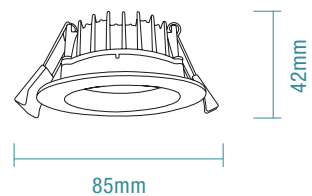

ULTRA



FEATURES

- Low glare fixed downlight ideal for residential, apartments and internal applications
- Aluminium housing with polycarbonate diffuser and remote driver
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature 3000K, 4000K and 5000K
- Compatible with Martec® lighting dimmer MTD350VAP and MTD350VAR (sold separately)

COLOUR AND VARIANTS




TLUD34510WD
Matt White

SPECIFICATIONS

Ordering Guide	TLUD34510WD
Colour	Matt White
Power Wattage	10W
Voltage	220-240Va.c. 50Hz
Materials / Housing	Aluminium housing
Cutout Size	Dia 90mm
Colour Temperature	3000K / 4000K / 5000K
Lumens Output	850lm / 900lm / 990lm
IP Rating	IP44 (Front Only)
Beam Angle	100°
CRI	Ra>80
Rated Lifetime	50,000 hours @ Ta25°
Dimmable	Yes
Flex and Plug	1M flex and plug

DIMENSIONS

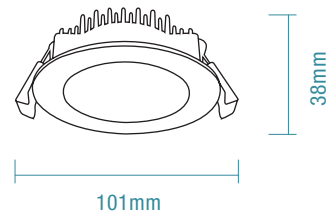

ACCESSORIES



MTD350VAP
Push Button Dimmer



MTD350VAR
Rotary Dimmer

PRIME



FEATURES

- Low glare fixed downlight ideal for residential, apartments and internal applications
- Aluminium housing with polycarbonate diffuser and remote driver
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature 3000K, 4000K and 5000K
- Compatible with Martec® lighting dimmer MTD350VAP and MTD350VAR (sold separately)

COLOUR AND VARIANTS




TLPD34510WD
Matt White

SPECIFICATIONS

Ordering Guide	TLPD34510WD
Colour	Matt White
Power Wattage	10W
Voltage	220-240Va.c. 50Hz
Materials / Housing	Aluminium housing
Cutout Size	Dia 90mm
Colour Temperature	3000K / 4000K / 5000K
Lumens Output	950lm / 1000lm / 1080lm
IP Rating	IP44 (Front Only)
Beam Angle	100°
CRI	Ra>80
Rated Lifetime	50,000 hours @ Ta25°
Dimmable	Yes
Flex and Plug	1M flex and plug

DIMENSIONS

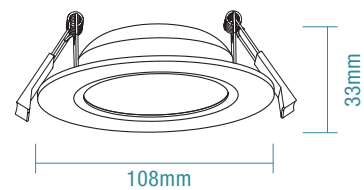

ACCESSORIES




MTD350VAP
Push Button Dimmer



MTD350VAR
Rotary Dimmer

TITAN II



FEATURES

- Low glare fixed downlight with recessed diffuser
- Ideal for residential, apartments and internal applications
- Thermoplastic housing with polycarbonate diffuser and remote driver
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature 3000K, 4000K and 5000K
- Compatible with Martec® lighting dimmer MTD350VAP and MTD350VAR (sold separately)

COLOUR AND VARIANTS



TLTD34510WD
Matt White




TLTD34510MD
Matt Black

SPECIFICATIONS

Ordering Guide	TLTD34510WD	TLTD34510MD
Colour	Matt White	Matt Black
Power Wattage	10W	
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Thermoplastic housing	
Cutout Size	Dia 90mm	
Colour Temperature	3000K / 4000K / 5000K	3000K / 4000K / 5000K
Lumens Output	950lm / 1000lm / 1080lm	900lm / 930lm / 970lm
IP Rating	IP44 (Front Only)	
Beam Angle	100°	
CRI	Ra>80	
Rated Lifetime	50,000 hours @ Ta25°	
Dimmable	Yes	
Flex and Plug	1M flex and plug	

DIMENSIONS

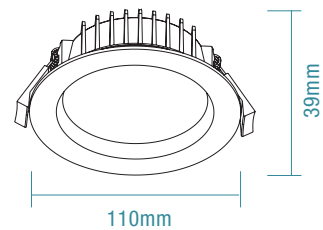

ACCESSORIES



MTD350VAP
Push Button Dimmer



MTD350VAR
Rotary Dimmer

BLITZ II



FEATURES

- Low profile fixed downlight with flush diffuser
- Ideal for residential, apartments and internal applications
- Thermoplastic housing with polycarbonate diffuser and remote driver
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature 3000K, 4000K and 5000K
- Compatible with Martec® lighting dimmer MTD350VAP and MTD350VAR (sold separately)

COLOUR AND VARIANTS



TLBD34510WD
Matt White




TBBD34510MD
Matt Black

SPECIFICATIONS

Ordering Guide	TLBD34510WD	TBBD34510MD
Colour	Matt White	Matt Black
Power Wattage	10W	
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Thermoplastic housing	
Cutout Size	Dia 90mm	
Colour Temperature	3000K / 4000K / 5000K	3000K / 4000K / 5000K
Lumens Output	950lm / 1000lm / 1080lm	900lm / 930lm / 970lm
IP Rating	IP44 (Front Only)	
Beam Angle	100°	
CRI	Ra>80	
Rated Lifetime	50,000 hours @ Ta25°	
Dimmable	Yes	
Flex and Plug	1M flex and plug	

DIMENSIONS

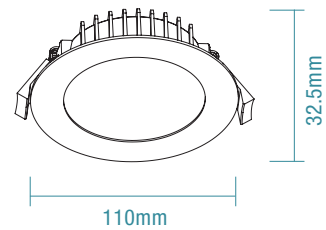

ACCESSORIES



MTD350VAP
Push Button Dimmer



MTD350VAR
Rotary Dimmer

NIKO



FEATURES

- Polyamide housing with polycarbonate recessed diffuser and integral driver
- Ideal for residential, apartments and retro-fit applications
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature 3000K, 4000K and 5000K
- Built-in integral driver
- Compatible with Martec® lighting dimmer MTD350VAP and MTD350VAR (sold separately)

COLOUR AND VARIANTS




TLND3459WD
Matt White

SPECIFICATIONS

Ordering Guide	TLND3459WD
Colour	Matt White
Power Wattage	9W
Voltage	220-240Va.c. 50Hz
Materials / Housing	Polyamide housing
Cutout Size	Dia 90mm
Colour Temperature	3000K / 4000K / 5000K
Lumens Output	780lm / 800lm / 820lm
IP Rating	IP44 (Front Only)
Beam Angle	100°
CRI	Ra>80
Rated Lifetime	35,000 hours @ Ta25°
Dimmable	Yes
Flex and Plug	600mm flex and plug

DIMENSIONS

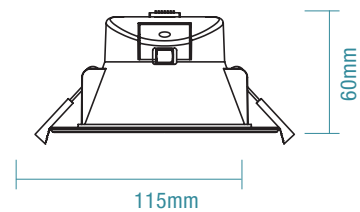

ACCESSORIES



MTD350VAP
Push Button Dimmer



MTD350VAR
Rotary Dimmer



Replacement
Warranty



Ingress
Protection



IC-Rated



IC-Rated



Dimmable



Tricolour



Class II

FEATURES

- Polyamide housing with polycarbonate flush diffuser and integral driver
- Ideal for residential, apartments and retro-fit applications
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature 3000K, 4000K and 5000K
- Built-in integral driver
- Compatible with Martec® lighting dimmer MTD350VAP and MTD350VAR (sold separately)

COLOUR AND VARIANTS




TLVD3459WD
Matt White

SPECIFICATIONS

Ordering Guide	TLVD3459WD
Colour	Matt White
Power Wattage	9W
Voltage	220-240Va.c. 50Hz
Materials / Housing	Polyamide housing
Cutout Size	Dia 90mm
Colour Temperature	3000K / 4000K / 5000K
Lumens Output	780lm / 800lm / 820lm
IP Rating	IP44 (Front Only)
Beam Angle	100°
CRI	Ra>80
Rated Lifetime	35,000 hours @ Ta25°
Dimmable	Yes
Flex and Plug	600mm flex and plug

DIMENSIONS

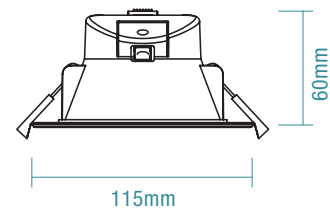

ACCESSORIES



MTD350VAP
Push Button Dimmer



MTD350VAR
Rotary Dimmer

DISCUS



FEATURES

- Low profile dual wattage 20W/30W fixed LED downlight
- Ideal for residential, apartments and commercial applications
- Aluminium housing with polycarbonate diffuser and remote driver
- IC-4 or IC-F covered and abutted with insulation
- Switchable colour temperature 3000K, 4000K and 5000K

COLOUR AND VARIANTS



TLDD34523WD
Matt White




Dual power
switch

SPECIFICATIONS

Ordering Guide	TLDD34523WD	
Colour	Matt White	
Power Wattage	20W	30W
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Aluminium housing	
Cutout Size	Dia 170-210mm	
Colour Temperature	3000K / 4000K / 5000K	3000K / 4000K / 5000K
Lumens Output	2250lm / 2550lm / 2550lm	3000lm / 3400lm / 3350lm
IP Rating	IP44 (Front Only)	
Beam Angle	100°	
CRI	Ra>80	
Rated Lifetime	50,000 hours @ Ta25°	
Dimmable	No	
Flex and Plug	1M flex and plug	

DIMENSIONS

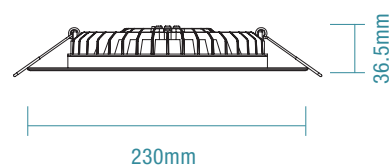

ZONE



- Replacement
Warranty
- Ingress
Protection
- IC-Rated
- IC-Rated
- Non
Dimmable
- Tricolour
- Sensor Angle
360° x 4m
- Class II

FEATURES

- 9W fixed LED downlight in white powder coated finish
- Ideal for residential, apartments and retro-fit applications
- Polyamide housing with polycarbonate diffuser and integral driver
- IC-4 or IC-F covered and abutted with insulation
- Built-in PIR motion sensor
- Switchable colour temperature 3000K, 4000K and 5000K

COLOUR AND VARIANTS




TLZD3459WDS
Matt White

SPECIFICATIONS

Ordering Guide	TLZD3459WDS
Colour	Matt White
Power Wattage	9W
Voltage	220-240Va.c. 50Hz
Materials / Housing	Polyamide housing
Cutout Size	Dia 90mm
Colour Temperature	3000K / 4000K / 5000K
Lumens Output	780lm / 850lm / 820lm
IP Rating	IP44 (Front Only)
Beam Angle	100°
CRI	Ra>80
Rated Lifetime	35,000 hours @ Ta25°
Sensor	PIR
Detection Range	360° up to 4M
Dimmable	No
Flex and Plug	600mm flex and plug

DIMENSIONS

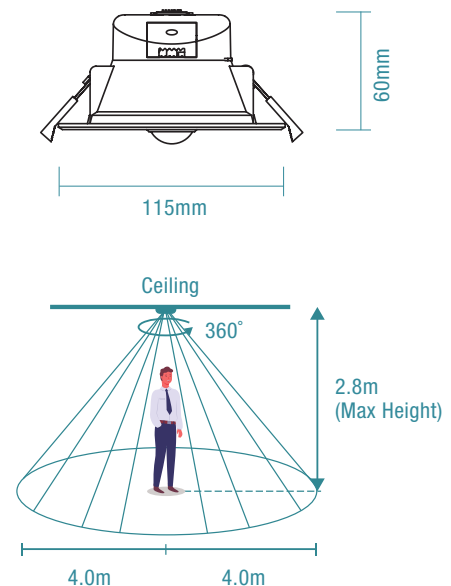



5
YEAR
Replacement
Warranty



IP
54
Ingress
Protection



Dimmable



Tricolour



Class I

FEATURES

- Modern designed with recessed reflector
- Powder coated aluminium housing with tempered glass diffuser
- Ideal for residential, apartments and office applications
- Switchable colour temperature 3000K, 4000K and 5000K
- Supplied with both clear and frosted diffusers
- Quick connector base for easy installation
- Compatible with Martec® dimmers MTD350VAP and MTD350VAR (sold separately)

SPECIFICATIONS

Ordering Code	TLKD34510WD	TLKD34510MD
Colour	White	Black
Power Wattage	10W	
Voltage	220-240V 50Hz	
Materials / Housing	Aluminium housing	
Cutout Size	N/A - Surface mounted	
Colour Temperature	3000K / 4000K / 5000K	3000K / 4000K / 5000K
Lumens Output	780lm / 820lm / 850lm	780lm / 820lm / 850lm
IP Rating	IP54	
Beam Angle	60°	
CRI	Ra>80	
Rated Lifetime	35,000 hrs @ Ta25°	
Dimmable	Yes	





COLOUR AND VARIANTS




TLKD34510WD
White



TLKD34510MD
Black

DIMENSIONS

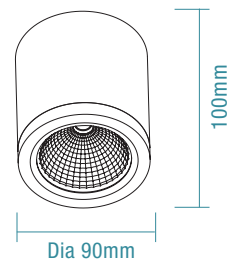

ACCESSORIES



MTD350VAP
Push Button Dimmer



MTD350VAR
Rotary Dimmer






SURFACE MOUNTED LIGHTING - OYSTER LIGHTS

Oyster lights provide an installation solution where functionality and style are required. They can be installed onto any flat surface and provide quality even light distribution.

Martec® offers a range of oyster lights with switchable colour temperature in different sizes, which is ideal for any residential and apartment applications.

Fino	172
Conrad	174
Orbit.....	176

FINO

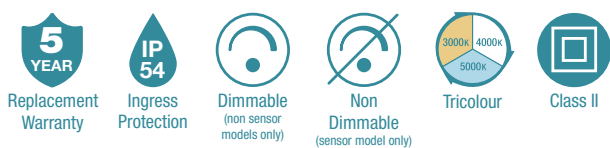

FEATURES

- Ultra slim aesthetically designed LED oyster
- Polycarbonate body with opal diffuser
- Ideal for residential, apartments and internal applications
- Edge lit and dimmable
- Switchable colour temperature 3000K, 4000K and 5000K
- Compatible with Martec® lighting dimmer MTD350VAP and MTD350VAR (sold separately)
- Supplied with microwave motion sensor with detection range at 360° up to 4M (sensor model only)

SPECIFICATIONS

Ordering Code	MLF034516WD	MLF034518WD	MLF034518MD	MLF034518WS	MLF034524WD	MLF034524MD	MLF034532WD	MLF034532MD	MLF034538WD
Colour	White	White	Matt Black	White Sensor	White	Matt Black	White	Matt Black	White
Size	210mm		280mm		350mm		420mm		500mm
Power Wattage	16W		18W		24W		32W		38W
Voltage	220-240Va.c. 50Hz								
Materials / Housing	Polycarbonate								
Colour Temperature	3000K / 4000K / 5000K	3000K / 4000K / 5000K			3000K / 4000K / 5000K		3000K / 4000K / 5000K		3000K / 4000K / 5000K
Lumens Output	1600lm / 2000lm / 1700lm	1300lm / 1400lm / 1400lm			1700lm / 1800lm / 1800lm		2300lm / 2400lm / 2400lm		2300lm / 2400lm / 2400lm
IP Rating	IP54								
Beam Angle	120°								
CRI	Ra>80								
Rated Lifetime	30,000 hours @ Ta25°								
Dimmable	Microwave motion sensor (sensor model only)								



COLOUR AND VARIANTS



MLF034516WD
White



MLF034518WD
White



MLF034518MD
Matt Black



MLF034518WS
White



MLF034524WD
White



MLF034524MD
Matt Black



MLF034532WD
White



MLF034532MD
Matt Black



MLF034538WD
White

ACCESSORIES




MTD350VAP
Push Button Dimmer



MTD350VAR
Rotary Dimmer

DIMENSIONS



Power Wattage	A	B	C
16W	Dia 210mm	25mm	16mm
18W + 18W Sensor	Dia 280mm	25mm	16mm
24W	Dia 350mm	25mm	16mm
32W	Dia 420mm	25mm	16mm
38W	Dia 500mm	25mm	16mm



FEATURES

- Modern slimline designed
- Polycarbonate body and diffuser
- Ideal for residential, apartments and internal applications
- Provides a uniform light-output using SMD LED technology
- Switchable colour temperature 3000K, 4000K and 5000K
- Compatible with Martec® lighting dimmer MTD350VAP and MTD350VAR (sold separately)

SPECIFICATIONS

Ordering Code	MLC034515WD	MLC034515MD	MLC034524WD	MLC034524MD	MLC034535WD	MLC034535MD
Colour	White	Matt Black	White	Matt Black	White	Matt Black
Size	200MM		300MM		400MM	
Power Wattage	15W		24W		35W	
Voltage	220-240Va.c. 50Hz					
Materials / Housing	Polycarbonate					
Colour Temperature	3000K / 4000K / 5000K		3000K / 4000K / 5000K		3000K / 4000K / 5000K	
Lumens Output	1300lm / 1500lm / 1400lm		2100lm / 2300lm / 2200lm		3100lm / 3300lm / 3200lm	
IP Rating	IP54					
Beam Angle	120°					
CRI	Ra>80					
Rated Lifetime	40,000 hours @ Ta25°					
Dimmable	Yes					



COLOUR AND VARIANTS



MLC034515WD
White



MLC034515MD
Matt Black



MLC034524WD
White



MLC034524MD
Matt Black



MLC034535WD
White



MLC034535MD
Matt Black

ACCESSORIES




MTD350VAP
Push Button Dimmer



MTD350VAR
Rotary Dimmer


DIMENSIONS

15 W




48mm

24 W

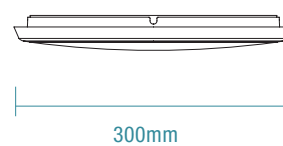

40mm

35 W

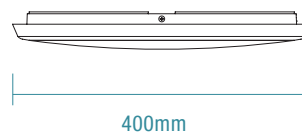

50mm

ORBIT



Replacement
Warranty



Ingress
Protection



Non
Dimmable



Tricolour



Class I

FEATURES

- Simple and sleek designed
- Steel base with acrylic diffuser
- Ideal for residential, apartments and internal applications
- Provides a uniform light-output using SMD LED technology
- Switchable colour temperature 3000K, 4000K and 5000K

SPECIFICATIONS

Ordering Code	ML0034512	ML0034518	ML034524	ML034528
Colour	White	White	White	White
Size	290MM	330MM	380MM	
Power Wattage	12W	18W	24W	28W
Voltage	220-240V a.c. 50Hz			
Materials / Housing	Steel			
Colour Temperature	3000K / 4000K / 5000K			
Lumens Output	900lm / 1000lm / 950lm	1400lm / 1600lm / 1500lm	1700lm / 1900lm / 1800lm	2200lm / 2400lm / 2300lm
IP Rating	IP20			
Beam Angle	120°			
CRI	Ra>80			
Rated Lifetime	35,000 hours @ Ta25°			
Dimmable	No			



COLOUR AND VARIANTS



ML0034512
White



ML0034518
White




ML034524
White




ML034528
White

DIMENSIONS


12 W

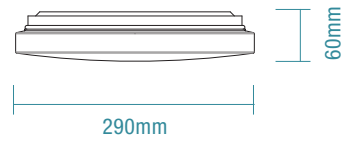

18 W

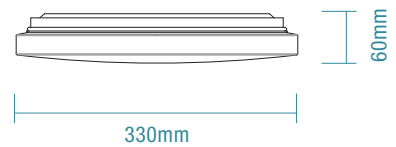

24 W/28 W

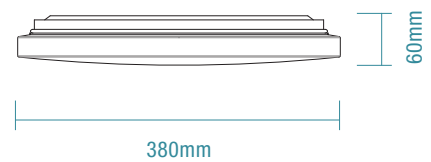






SURFACE MOUNTED LIGHTING - BATTENS

Battens provide an installation solution where functionality is required. They can be installed onto any flat surface and provide quality even light distribution.

Martec® offers a range of LED battens with switchable colour temperature and motion sensor models, which is ideal for any workshops, garages and retro-fit applications.

Pilot.....	180
Blade.....	181
Diffused Batten	182
Weatherproof Batten	184

PILOT



FEATURES

- Wide body and slimline design
- Ideal for storages, workshops and retro-fit applications
- Aluminium housing with polycarbonate diffuser and end caps
- Dual access point for easy wiring and installation (centre and side)
- Switchable colour temperature 3000K, 4000K and 5000K

SPECIFICATIONS

	Nominal Length 600MM	Nominal Length 1200MM
Ordering Guide	MLPB60345W	MLPB12345W
Colour	White	White
Power Wattage	20W	40W
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Aluminium body polycarbonate diffuser and end caps	
Colour Temperature	3000K / 4000K / 5000K	3000K / 4000K / 5000K
Lumens Output	1800lm / 2000lm / 1900lm	3600lm / 4000lm / 3800lm
IP Rating	IP20	
Beam Angle	120°	
CRI	Ra>80	
Rated Lifetime	40,000 hours @ Ta25°	

COLOUR AND VARIANTS






MLPB60345W
White



MLPB12345W
White

DIMENSIONS

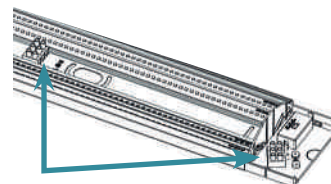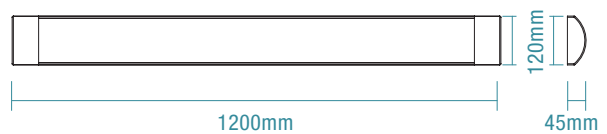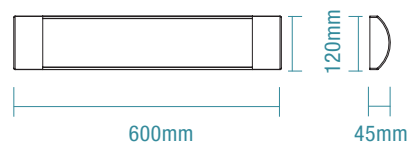

Terminal block connections
and cable entry access point
(middle and side entry)

BLADE



Replacement Warranty



Ingress Protection



Tricolour



Class I

FEATURES

- Low profile and slimline design
- Ideal for storages, workshops and common area applications
- Aluminium housing with polycarbonate diffuser and end caps
- Centre terminal block and cable entry for easy wiring and installation
- Direct mounting to the ceiling with no brackets required
- Switchable colour temperature 3000K, 4000K and 5000K

COLOUR AND VARIANTS



MLBF60345W

White




MLBF12345W

White

SPECIFICATIONS

	Nominal Length 600MM	Nominal Length 1200MM
Ordering Guide	MLBF60345W	MLBF12345W
Colour	White	White
Power Wattage	20W	36W
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Aluminium body polycarbonate diffuser and end caps	
Colour Temperature	3000K / 4000K / 5000K	3000K / 4000K / 5000K
Lumens Output	1500lm / 1700lm / 1600lm	3000lm / 3400lm / 3200lm
IP Rating	IP20	
Beam Angle	120°	
CRI	Ra>80	
Rated Lifetime	40,000 hours @ Ta25°	

DIMENSIONS

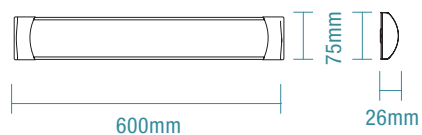

DIFFUSED BATTEN



FEATURES

- IP20 low profile design
- Ideal for storages, workshops and internal applications
- Metal housing with polycarbonate diffuser and end caps
- Centre terminal block and cable entry for easy wiring and installation
- Sliders at both end caps for ease of use
- Switchable colour temperature 3000k, 4000K and 6500K

SPECIFICATIONS

	Nominal Length 600MM	Nominal Length 1200MM
Ordering Code	TLDB34620	TLDB34640
Colour	White	White
Power Wattage	20W	40W
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Metal housing with polycarbonate diffuser and end caps	
Colour Temperature	3000K / 4000K / 6500K	3000K / 4000K / 6500K
Lumens Output	2350lm / 2400lm / 2300lm	4700lm / 4900lm / 4600lm
IP Rating	IP20	
Beam Angle	120°	
CRI	Ra>80	
Rated Lifetime	30,000 hours @ Ta25°	



COLOUR AND VARIANTS




TLDB34620
White



TLDB34640
White

DIMENSIONS

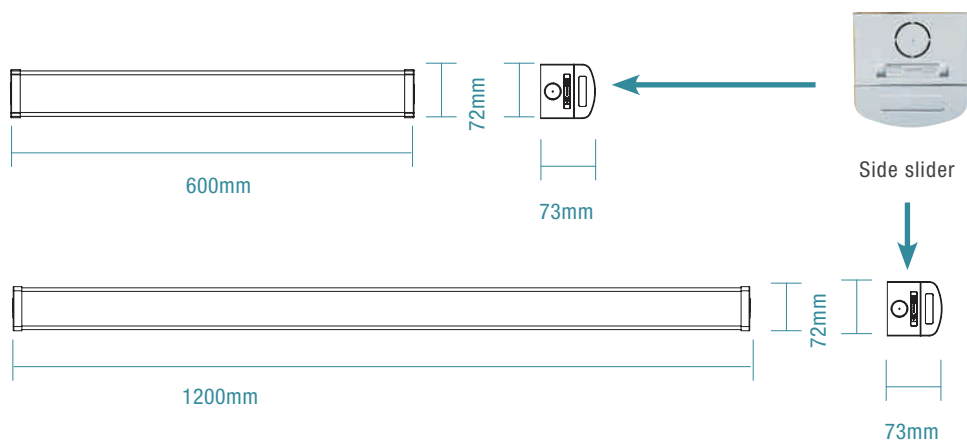

WEATHERPROOF BATTEN



FEATURES

- IP65 weatherproof LED batten with industrial designed
- Ideal for residential and commercial applications like corridors and walk ways
- Durable polycarbonate housing and diffuser with stainless steel clips
- IK06 impact protection
- Switchable colour temperature 3000K, 4000K and 6500K

SPECIFICATIONS

	Nominal Length 600MM	Nominal Length 1200MM
Ordering Code	TLWB34618	TLWB34639
Colour	Grey	Grey
Power Wattage	18W	40W
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Durable polycarbonate housing and diffuser, stainless steel clips	
Colour Temperature	3000K / 4000K / 6500K	3000K / 4000K / 6500K
Lumens Output	2100lm / 2300lm / 2200lm	4500lm / 5200lm / 4800lm
IP Rating	IP65	
Beam Angle	120°	
CRI	Ra>80	
Rated Lifetime	30,000 hours @ Ta25°	



COLOUR AND VARIANTS





TLWB34618
White



TLWB34639
White

DIMENSIONS

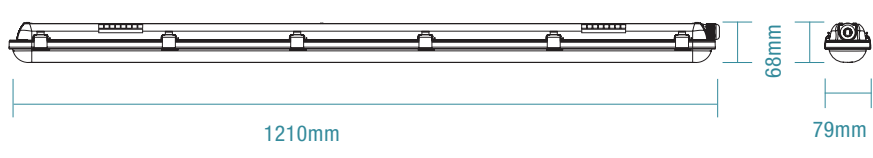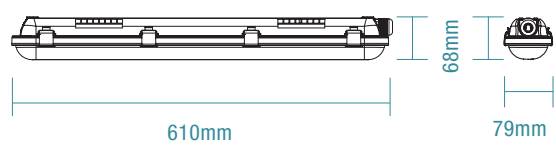

DAYLIGHT APPLICATION

APPLICATION EXAMPLE


Hold time: 5 mins

Daylight Threshold: 50lux

Standby Dimming level: 10%


Standby Period: infinity

1




The light remains off when natural light level exceeds daylight threshold preset, even if motion is detected.

2

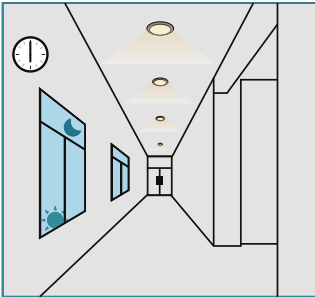


The light automatically turns on at a dim level when natural light lux level drops below preset daylight threshold, even if there is no motion detected.

3




When there is motion detected the light switches on at brightness level.

4

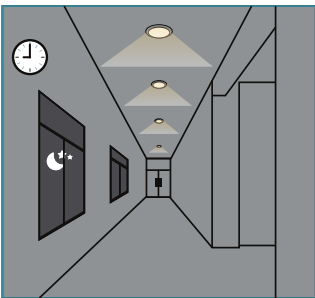

The light automatically turns on at a dim level again when there is no motion detected.

5




The light automatically turns off when the natural light exceeds daylight threshold preset, even with presence.

DIM DOWN APPLICATION


(CORRIDOR FUNCTION)




The light remains off during daytime even when movement is detected. (Ambient lux level is above preset daylight threshold).

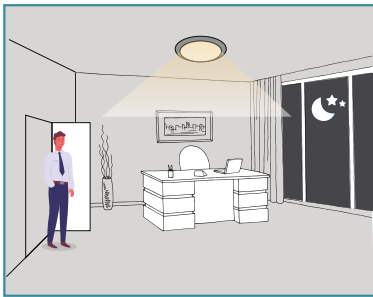

With movement and insufficient ambient lux level, the light is triggered on 100% by the detector.

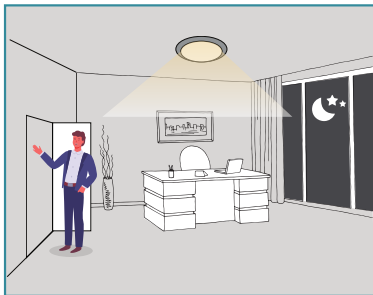

If there is no more movement, the light dims to stand-by dimming level after hold-time.

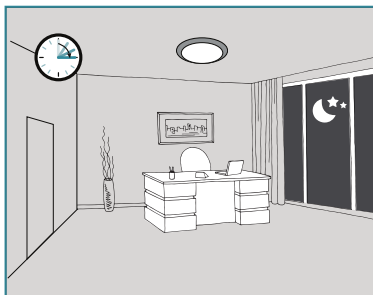

The light turns off automatically after stand-by time.





NEW

EXTERIOR LIGHTING - WALL LIGHTS

Exterior wall lights are essential for illuminating the outside of buildings, enhancing aesthetics, and providing security.

Proper placement and spacing of the lights can significantly enhance the overall look and functionality of your outdoor space.

Integra.....	190
Modus.....	191
Kiora	192
Sorrento	193
Nova.....	194
Taurus	195
Delta	196
Torino	197

INTEGRA



FEATURES

- Modern and robust designed for a wide range of applications both indoor and outdoor
- Die-cast aluminium housing with glass diffuser
- Ideal lighting solution for areas around the house, pathways and entrance areas
- IP54 rated up/down wall light
- Features 2 high output LEDs 6W (2x3W) and 10W (2x5W)
- Switchable colour temperature 3000K, 4000K and 5000K
- Supplied with terminal block and mounting plate for easy installation

COLOUR AND VARIANTS



MLXI3456W
White



MLXI3456M
Matt Black



MLXI24510W
White





MLXI24510M
Matt Black

SPECIFICATIONS

Ordering Code	MLXI3456W	MLXI3456M	MLXI24510W	MLXI24510M
Colour	White	Matt Black	White	Matt Black
Power Wattage	6W		10W	
Voltage	220-240Va.c. 50Hz			
Materials / Housing	Die-cast aluminium housing and acrylic diffuser			
Colour Temperature	3000K / 4000K / 5000K		3000K / 4000K / 5000K	
Lumens Output	350lm		635lm	
IP Rating	IP54			
Beam Angle	150°			
CRI	Ra>80			
Rated Lifetime	30,000 hours @ Ta25°			
Dimmable	No			

DIMENSIONS

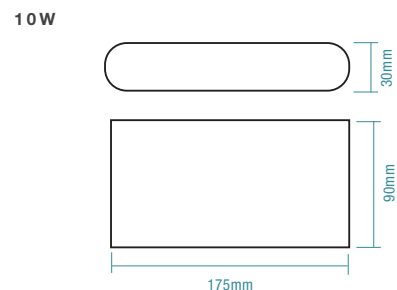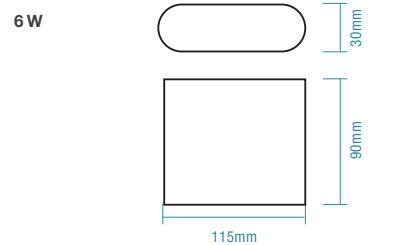

MODUS



FEATURES

- Modern and robust designed for a wide range of applications both indoor and outdoor
- Die-cast aluminium housing with glass diffuser
- Ideal lighting solution for areas around the house, pathways and entrance areas
- IP54 rated up/down wall light
- Features 2 high output LEDs 6W (2x3W) and 10W (2x5W)
- Switchable colour temperature 3000K, 4000K and 5000K
- Supplied with terminal block and mounting plate for easy installation

COLOUR AND VARIANTS



MLXM3456W
White



MLXM3456M
Matt Black



MLXM34510W
White





MLXM34510M
Matt Black


SPECIFICATIONS

Ordering Code	MLXM3456W	MLXM3456M	MLXM34510W	MLXM34510M
Colour	White	Matt Black	White	Matt Black
Power Wattage	6W		10W	
Voltage	220-240V a.c. 50Hz			
Materials / Housing	Aluminium housing and glass diffuser			
Colour Temperature	3000K / 4000K / 5000K		3000K / 4000K / 5000K	
Lumens Output	350lm		635lm	
IP Rating	IP54			
Beam Angle	150°			
CRI	Ra>80			
Rated Lifetime	30,000 hours @ Ta25°			
Dimmable	No			

DIMENSIONS

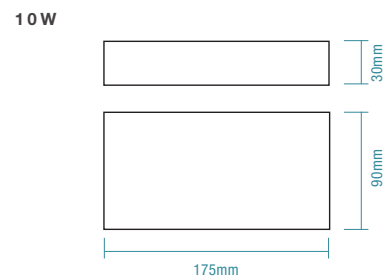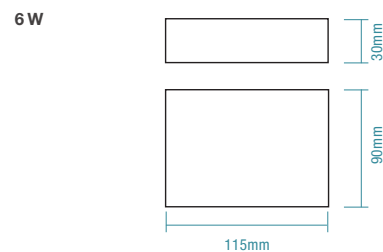

KIORA

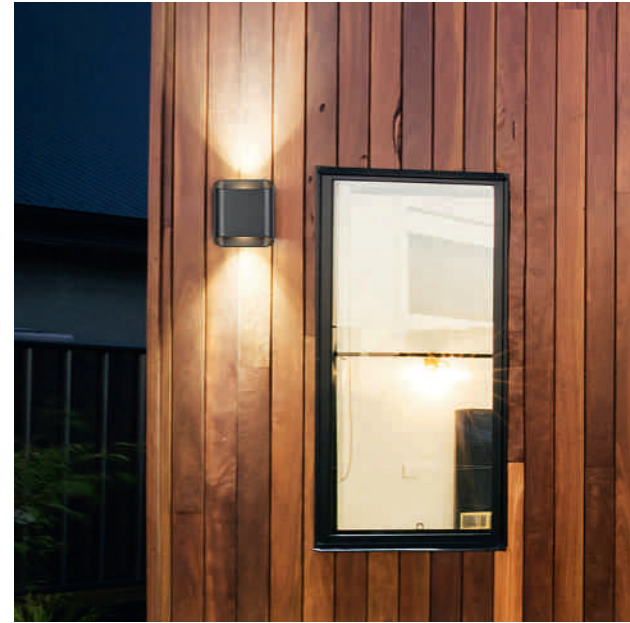

FEATURES

- Modern designed IP54 exterior wall light
- Ideal solution for effective and efficient accent lighting of walls and facades
- Powder coated aluminium housing
- Glare free and indirect lighting
- Switchable colour temperature 3000K, 4000K and 5000K
- Supplied with terminal block and mounting plate for easy installation

COLOUR AND VARIANTS



MLXK34510W
White




MLXK34510M
Matt Black

SPECIFICATIONS

Ordering Code	MLXK34510W	MLXK34510M
Colour	White	Matt Black
Power Wattage	10W	
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Powder coated aluminium	
Colour Temperature	3000K / 4000K / 5000K	
Lumens Output	900lm	
IP Rating	IP54	
Beam Angle	150°	
CRI	Ra>80	
Rated Lifetime	30,000 hours @ Ta25°	
Dimmable	No	

DIMENSIONS

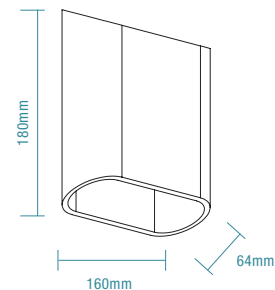

SORRENTO



FEATURES

- Modern designed IP54 exterior wall light
- Ideal solution for effective and efficient accent lighting of walls and facades
- Powder coated aluminium housing
- Glare free and indirect lighting
- Switchable colour temperature 3000K, 4000K and 5000K
- Supplied with terminal block and mounting plate for easy installation

SPECIFICATIONS

Ordering Code	MLXS34510W	MLXS34510M
Colour	White	Matt Black
Power Wattage	10W	
Voltage	220-240V.a.c. 50Hz	
Materials / Housing	Powder coated aluminium	
Colour Temperature	3000K / 4000K / 5000K	
Lumens Output	900lm	
IP Rating	IP54	
Beam Angle	90°	
CRI	Ra>80	
Rated Lifetime	30,000 hours @ Ta25°	
Dimmable	No	

COLOUR AND VARIANTS




MLXS34510W
White



MLXS34510M
Matt Black

DIMENSIONS

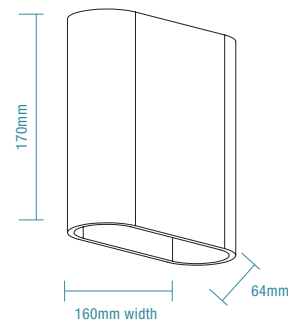

NOVA



FEATURES

- Modern and robust designed for a wide range of applications both indoor and outdoor
- Powder coated aluminium housing with polycarbonate diffuser
- Ideal solution for effective and efficient accent lighting of walls and facades
- IP54 rated up/down wall light
- Switchable colour temperature 3000K, 4000K and 5000K
- Supplied with terminal block and mounting plate for easy installation

COLOUR AND VARIANTS



MLXN3456W
White



MLXN3456M
Matt Black



MLXN34510W
White





MLXN34510M
Matt Black

SPECIFICATIONS

Ordering Code	MLXN3456W	MLXN3456M	MLXN34510W	MLXN34510M
Colour	White	Matt Black	White	Matt Black
Power Wattage	6W		12W	
Voltage	220-240Va.c. 50Hz			
Materials / Housing	Powder coated aluminium			
Colour Temperature	3000K / 4000K / 5000K		3000K / 4000K / 5000K	
Lumens Output	375lm		750lm	
IP Rating	IP54			
Beam Angle	150°			
CRI	Ra>80			
Rated Lifetime	30,000 hours @ Ta25°			
Dimmable	No			

DIMENSIONS

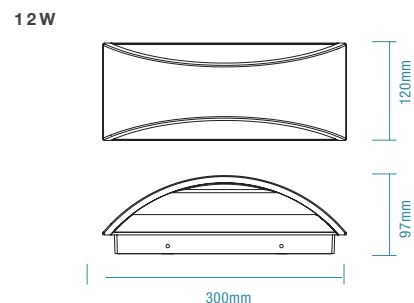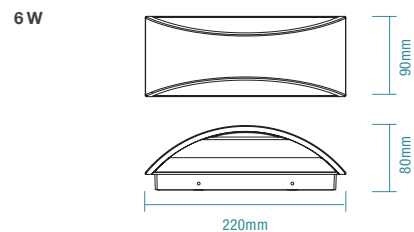

TAURUS



FEATURES

- Modern decorative IP54 exterior wall light
- Ideal lighting solution for area around the house, pathways and entrance areas
- Power coated aluminium housing with polycarbonate diffuser
- Ease of wiring with terminal block connectors
- Supplied with mounting plate for easy installation
- Compatible with E27* lamp (not included)

SPECIFICATIONS

Ordering Code	MLXTE27W	MLXTE27M
Colour	White	Matt Black
Power Wattage	Max. 15W E27* lamp	
Voltage	220-240V a.c. 50Hz	
Materials / Housing	Aluminium	
IP Rating	IP54	

COLOUR AND VARIANTS




MLXTE27W
White




MLXTE27M
Matt Black

DIMENSIONS

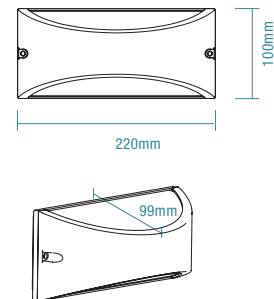

DELTA

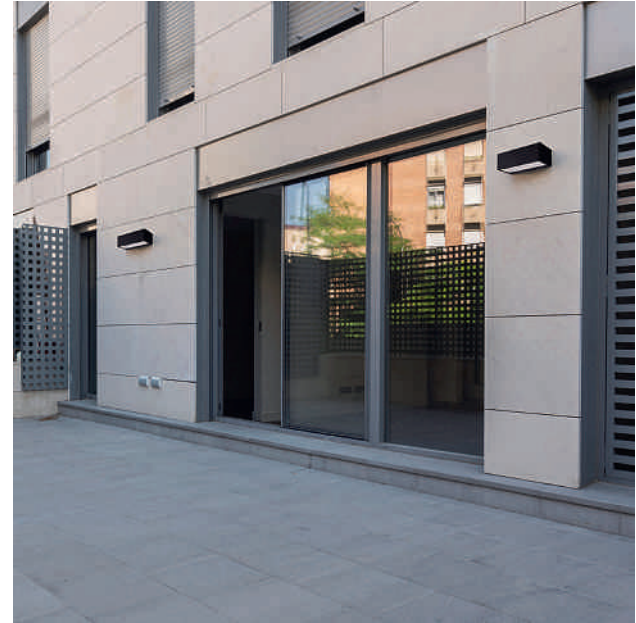

FEATURES

- Modern and robust designed for a wide range of applications both indoor and outdoor
- Die-cast aluminium housing with glass diffuser
- Ideal lighting solution for area around the house, pathways and entrance areas
- IP54 rated up/down wall light
- Switchable colour temperature 3000K, 4000K and 5000K
- Supplied with terminal block and mounting plate for easy installation

COLOUR AND VARIANTS



MLXD34518W
White




MLXD34518M
Matt Black

SPECIFICATIONS

Ordering Code	MLXD34518W	MLXD34518M
Colour	White	Matt Black
Power Wattage	18	
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Die-cast aluminium housing and glass diffuser	
Colour Temperature	3000K / 4000K / 5000K	
Lumens Output	820lm	
IP Rating	IP54	
Beam Angle	150°	
CRI	Ra>80	
Rated Lifetime	30,000 hours @ Ta25°	
Dimmable	No	

DIMENSIONS

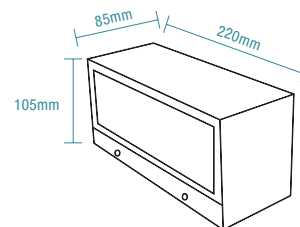

TORINO



Replacement
Warranty



Ingress
Protection



Non
Dimmable



Tricolour



Class I

FEATURES

- Modern designed and IP54 rated wall light
- Die-cast aluminium housing with polycarbonate diffuser
- Ideal solution for effective and efficient accent lighting of walls and facades
- Switchable colour temperature 3000K, 4000K and 5000K
- Supplied with terminal block and mounting plate for easy installation

SPECIFICATIONS

Ordering Code	MLXT3458W	MLXT3458M	MLXT3459W	MLXT3459M
Colour	White	Matt Black	White	Matt Black
Power Wattage	6W		9W	
Voltage	220-240V.a.c. 50Hz			
Materials / Housing	Aluminium housing and polycarbonate diffuser			
Colour Temperature	3000K / 4000K / 5000K		3000K / 4000K / 5000K	
Lumens Output	490lm		710lm	
IP Rating	IP54			
Beam Angle	N/A			
CRI	Ra>80			
Rated Lifetime	30,000 hours @ Ta25°			
Dimmable	No			

COLOUR AND VARIANTS



MLXT3458W
White



MLXT3458M
Matt Black




MLXT3459W
White




MLXT3459M
Matt Black

DIMENSIONS

7W



9W

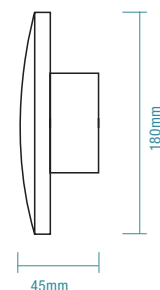





NEW

EXTERIOR LIGHTING - DECORATIVE LIGHTS

When selecting decorative exterior lighting, consider the overall theme and style of your outdoor area, as well as practical factors such as durability, energy efficiency, and ease of installation. Experiment with different lighting techniques and fixtures to create a personalized and inviting outdoor environment.

Vancouver	200
Ashton.....	201
Crew.....	202
Bronte	203

VANCOUVER



FEATURES

- Modern decorative IP44 exterior wall light
- Ideal lighting solution for area around the house, pathways and entrance areas
- Robust die-cast aluminium frame with clear tempered glass
- Ease of wiring with terminal block connectors
- Compatible with E27* lamp (not included)
- Supplied with mounting plate for easy installation (FLM & FSM models only)

SPECIFICATIONS

Ordering Code	MLXVE27FLM	MLXVE27FSM	MLXVE27MS	MLXVE27WBM*
Colour	Matt Black	Matt Black	Matt Black	Matt Black
Power Wattage	Max. 60W E27* lamp			
Voltage	220-240Va.c. 50Hz			
Materials / Housing	Die-cast aluminium			
Colour Temperature	-			
Lumens Output	-			
IP Rating	IP44			
Beam Angle	-			
CRI	-			
Rated Lifetime	-			
Sensor	-	-	PIR	-
Hold Time	-	-	10s - 8m adjustable	-
Detection Range	-	-	120° up to 8M	-



COLOUR AND VARIANTS



MLXVE27FLM
Matt Black



MLXVE27FSM
Matt Black



MLXVE27MS
Matt Black with Sensor




MLXVE27WBM*
Matt Black


*Can only be installed as illustrated.

DIMENSIONS


MLXVE27FLM




MLXVE27FSM



MLXVE27MS



MLXVE27WBM



ASHTON



Replacement
Warranty



Ingress
Protection



Non
Dimmable



Tricolour



Class I

FEATURES

- Modern decorative IP54 exterior wall light
- Robust die-cast aluminium frame with UV resistant polycarbonate diffuser
- Ideal lighting solution for area around the house, pathways and entrance areas
- Integral LED light source
- Switchable colour temperature 3000K, 4000K and 5000K
- Supplied with terminal block and mounting plate for easy installation

SPECIFICATIONS

Ordering Code	MLXA34510W	MLXA34510M
Colour	White	Matt Black
Power Wattage	10W	
Voltage	220-240V 50Hz	
Materials / Housing	Aluminium housing	
Colour Temperature	3000K / 4000K / 5000K	
Lumens Output	980lm	
IP Rating	IP54	
Beam Angle	N/A	
CRI	Ra>80	
Rated Lifetime	30,000 hours @ Ta25°	
Dimmable	No	

COLOUR AND VARIANTS




MLXA34510W
White



MLXA34510M
Matt Black

DIMENSIONS

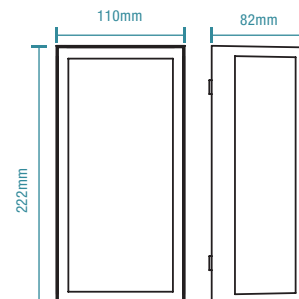

CREW



FEATURES

- Modern decorative IP65 exterior wall light
- Robust die-cast aluminium frame with UV resistant polycarbonate diffuser
- Ideal lighting solution for area around the house, pathways and entrance areas
- Integral LED light source
- Switchable colour temperature 3000K, 4000K and 5000K
- Supplied with terminal block and mounting plate for easy installation

COLOUR AND VARIANTS



MLXC34512W
White




MLXC34512M
Matt Black

SPECIFICATIONS

Ordering Code	MLXC34512W	MLXC34512M
Colour	White	Matt Black
Power Wattage	12W	
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Aluminium housing	
Colour Temperature	3000K / 4000K / 5000K	
Lumens Output	980lm	
IP Rating	IP65	
Beam Angle	N/A	
CRI	Ra>80	
Rated Lifetime	30,000 hours @ Ta25°	
Dimmable	No	

DIMENSIONS

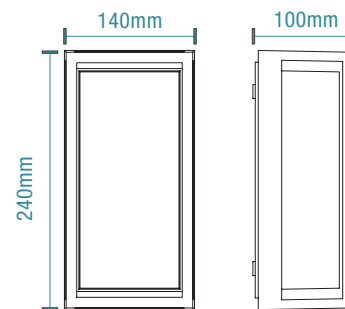

BRONTE



Exterior Lighting -
Decorative

FEATURES

- Modern decorative IP65 exterior wall light
- Ideal lighting solution for area around the house, pathways and entrance areas
- Power coated aluminium frame with clear tempered glass shade
- Ease of wiring with terminal block connectors
- Compatible with E27* lamp (not included)

COLOUR AND VARIANTS



MLXBE27M
Matt Black




MLXBE27R
Rustic Bronze

SPECIFICATIONS

Ordering Code	MLXBE27M	MLXBE27R
Colour	Matt Black	Rustic Bronze
Power Wattage	Max. 60W E27* lamp	
Voltage	220-240V a.c. 50Hz	
Materials / Housing	Powder coated aluminium housing	
IP Rating	IP65	

DIMENSIONS

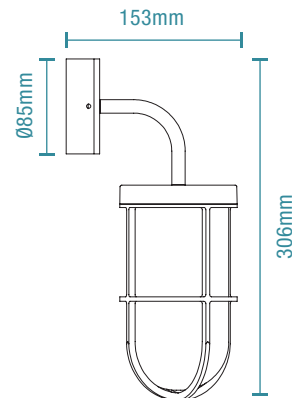





NEW


EXTERIOR LIGHTING - STEP LIGHTS

Step lights, also known as stair lights or stairway lighting, are fixtures specifically designed to provide both practical illumination and aesthetic enhancement, making them a valuable addition to staircases, pathways, and outdoor spaces.

By considering factors such as brightness, beam angle, and installation method, you can select step lights that effectively meet your lighting needs and complement your overall design aesthetic.

Circa	206
Quattro	207
Tivoli	208
Regis	209
Aspen	210

CIRCA

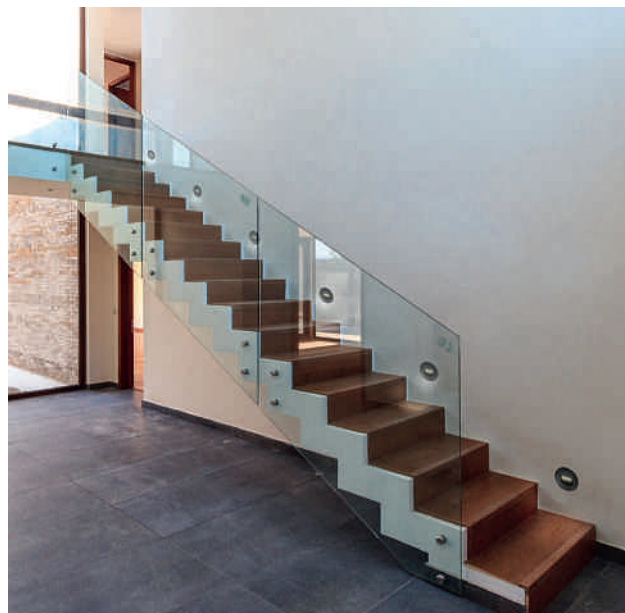

FEATURES

- Modern and robust designed for a wide range of applications both indoor and outdoor
- Powder coated aluminium and polycarbonate housing, glass light lens
- Ideal lighting solution for areas around the house, pathways and stairs areas
- IP54 rated recessed step light
- Glare free and indirect lighting

SPECIFICATIONS

Ordering Code	MLXC33W	MLXC33M
Colour	White	Matt Black
Power Wattage	3W	
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Powder coated aluminium and polycarbonate housing	
Colour Temperature	3000K	
Lumens Output	100lm	
IP Rating	IP54	
Beam Angle	90°	
CRI	Ra>80	
Rated Lifetime	30,000 hours @ Ta25°	
Dimmable	No	

COLOUR AND VARIANTS




MLXC33W
White



MLXC33M
Matt Black

DIMENSIONS



QUATTRO



FEATURES

- Modern and robust designed for a wide range of applications both indoor and outdoor
- Ideal lighting solution for areas around the house, pathways and stairs areas
- IP54 rated recessed step light
- Glare free and indirect lighting
- Powder coated aluminium and polycarbonate housing, glass light lens

SPECIFICATIONS

Ordering Code	MLXQ3453W	MLXQ3453M
Colour	White	Matt Black
Power Wattage	3W	
Voltage	220-240V a.c. 50Hz	
Materials / Housing	Polycarbonate housing	
Colour Temperature	3000K / 4000K / 5000K	
Lumens Output	100lm	
IP Rating	IP54	
Beam Angle	90°	
CRI	Ra>80	
Rated Lifetime	30,000 hours @ Ta25°	
Dimmable	No	

COLOUR AND VARIANTS




MLXQ3453W
White



MLXQ3453M
Matt Black

DIMENSIONS

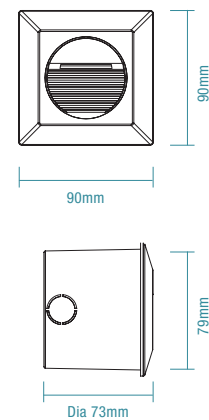

TIVOLI



Replacement
Warranty



Ingress
Protection




Non
Dimmable



Tricolour



Class I

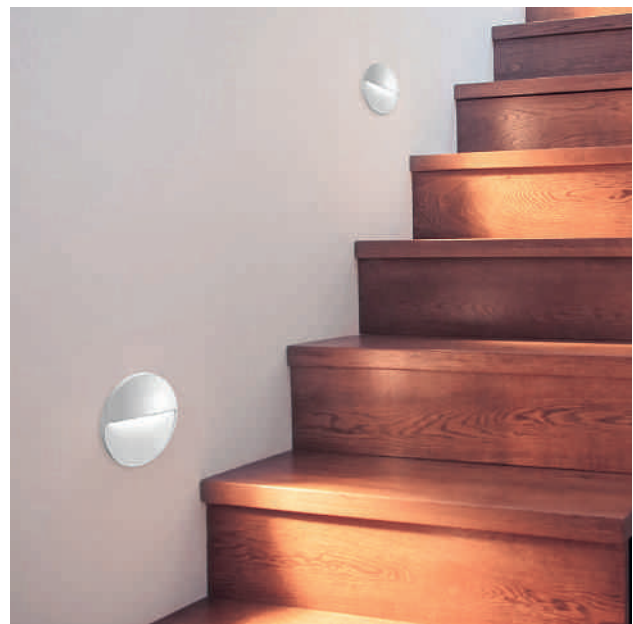

FEATURES

- Surface mounted, modern and robust designed for a wide range of applications both indoor and outdoor
- IP54 rated ideal lighting solution for areas around the house, pathways and entrance areas
- Glare free and indirect lighting
- Powder coated aluminium housing
- Switchable colour temperature 3000K, 4000K and 5000K
- Supplied with terminal block and mounting plate for easy installation

COLOUR AND VARIANTS



MLXT3454W
White




MLXT3454M
Matt Black

SPECIFICATIONS

Ordering Code	MLXT3454W	MLXT3454M
Colour	White	Matt Black
Power Wattage	4W	
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Aluminium	
Colour Temperature	3000K / 4000K / 5000K	
Lumens Output	200lm	
IP Rating	IP54	
Beam Angle	90°	
CRI	Ra>80	
Rated Lifetime	30,000 hours @ Ta25°	
Dimmable	No	

DIMENSIONS



REGIS



2
YEAR
Replacement
Warranty



IP
54
Ingress
Protection



Non
Dimmable



3000K 4000K
5000K
Tricolour



Class I

FEATURES

- Surface mounted, modern and robust designed for a wide range of applications both indoor and outdoor
- IP54 rated lighting solution for areas around the house, pathways and entrance areas
- Ideal solution for effective and efficient accent lighting of walls and facades
- Powder coated aluminium housing
- Supplied with mounting plate for easy installation
- Switchable colour temperature 3000K, 4000K and 5000K

SPECIFICATIONS

Ordering Code	MLXR3454W	MLXR3454M
Colour	White	Matt Black
Power Wattage	4W	
Voltage	220-240V.a.c. 50Hz	
Materials / Housing	Aluminium	
Colour Temperature	3000K / 4000K / 5000K	
Lumens Output	200lm	
IP Rating	IP54	
Beam Angle	90°	
CRI	Ra>80	
Rated Lifetime	30,000 hours @ Ta25°	
Dimmable	No	

COLOUR AND VARIANTS




MLXR3454W
White



MLXR3454M
Matt Black

DIMENSIONS

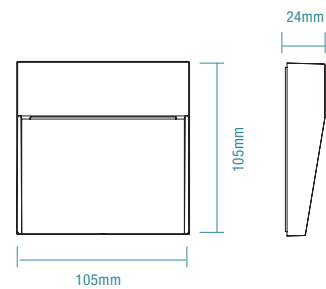

ASPEN



Replacement
Warranty



Ingress
Protection



Non
Dimmable



Tricolour



Class I

FEATURES

- Modern and robust designed for a wide range of applications both indoor and outdoor
- Powder coated aluminium and polycarbonate housing
- Ideal lighting solution for areas around the house, pathways and stairs areas
- IP54 rated recessed step light
- Frosted glass lens for smooth lighting

SPECIFICATIONS

Ordering Code	MLXA3453W	MLXA3453M
Colour	White	Matt Black
Power Wattage	3W	
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Polycarbonate housing	
Colour Temperature	3000K / 4000K / 5000K	
Lumens Output	100lm	
IP Rating	IP54	
Beam Angle	120°	
CRI	Ra>80	
Rated Lifetime	30,000 hours @ Ta25°	
Dimmable	No	



COLOUR AND VARIANTS




MLXA3453W
White



MLXA3453M
Matt Black

DIMENSIONS



90mm

90mm

66mm







NEW

EXTERIOR LIGHTING - SPOT LIGHTS

Spotlights are versatile lighting fixtures that can enhance the functionality and aesthetics of both indoor and outdoor spaces. Whether you're highlighting architectural details, illuminating artwork, or enhancing security, spotlights offer flexibility and precision in lighting design.

Capri	214
Crest	216

CAPRI



FEATURES

- Modern designed IP65 rated surface mount spot light
- Security lighting solution for area around the house, interior and alfresco areas
- Switchable colour temperature 3000K, 4000K and 5000K
- Supplied with waterproof screw terminal junction box for easy installation
- Adjustable head with 360° horizontally and 90° vertically
- Manual override function for sensor setting (Sensor model only)

SPECIFICATIONS

	Single Head		Double Head		Double Head Sensor	
Ordering Code	MLXC3451W	MLXC3451M	MLXC3452W	MLXC3452M	MLXC3452WS	MLXC3452MS
Colour	White	Matt Black	White	Matt Black	White	Matt Black
Power Wattage	9W					
Voltage	220-240V a.c. 50Hz					
Materials / Housing	Powder coated aluminium					
Colour Temperature	3000K / 4000K / 5000K					
Lumens Output	800lm					
IP Rating	IP65					
Beam Angle	90°					
CRI	Ra>80					
Rated Lifetime	30,000 hours @ Ta25°					
Sensor	N/A		N/A		PIR	
Hold Time					10s - 8min adjustable	
Detection Range					120° up to 8m	





COLOUR AND VARIANTS



MLXC3451W
White



MLXC3451M
Matt Black



MLXC3452W
White



MLXC3452M
Matt Black




MLXC3452WS
White




MLXC3452MS
Matt Black

DIMENSIONS


SINGLE HEAD

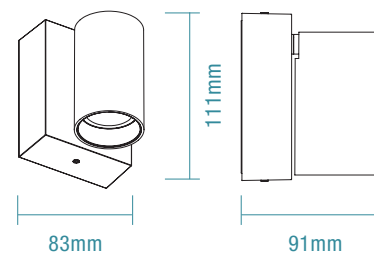

DOUBLE HEAD

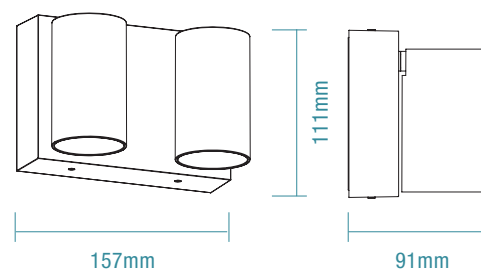

DOUBLE HEAD PIR SENSOR

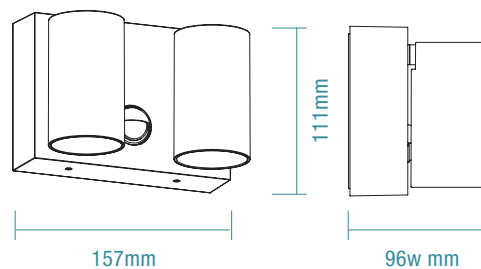

CREST



316
Stainless Steel



FEATURES

- Modern designed IP65 rated surface mount spot light
- Ideal lighting solution for area around the house, interior and alfresco areas
- 316 stainless steel housing
- Supplied with waterproof screw terminal junction box for easy installation
- Adjustable head with 360° horizontally and 90° vertically
- Compatible with GU10* lamp (not included)

SPECIFICATIONS

	2 Heads		3 Heads		4 Heads	
Ordering Code	MLCS2W	MLCS2M	MLCS3W	MLCS3M	MLCS4W	MLCS4M
Colour	White	Matt Black	White	Matt Black	White	Matt Black
Power Wattage	Max 2 x 10W GU10* lamp		Max 3 x 10W GU10* lamp		Max 4 x 10W GU10* lamp	
Voltage	220-240V a.c. 50Hz					
Materials / Housing	316 stainless steel					
IP Rating	IP65					
Beam Angle	90°					

*GU10 lamp not included.



COLOUR AND VARIANTS



MLCS2W
White



MLCS2M
Matt Black



MLCS3W
White



MLCS3M
Matt Black




MLCS4W
White




MLCS4M
Matt Black

DIMENSIONS


2 HEADS

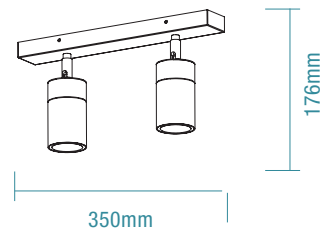

3 HEADS

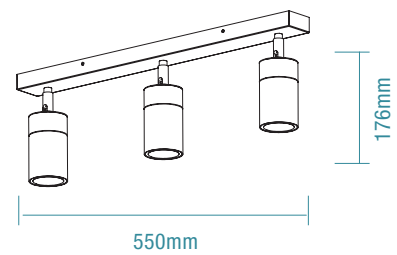

4 HEADS

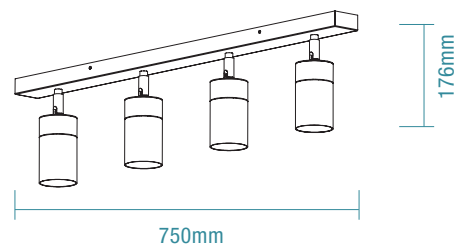






EXTERIOR LIGHTING - SECURITY LIGHTS

Martec® offers a full range of security lights with features such as switchable colour temperature, different wattages and ingress protection ratings to suit any outdoor application. With built in PIR or Microwave Motion sensors, providing security and safety in all applications.

Fortress Pro.....	220
Fortress II.....	222
Bandit	224
Defender	226

FORTRESS PRO



FEATURES

- Modern and robust designed exterior light for security lighting and safety
- Ideal solution for entrances, alfresco and exterior applications
- Die-cast aluminium with UV stabilised plastic mounting base
- Fully adjustable head
- Quick connect base for fast and easy installation
- Manual override function
- Switchable colour temperature 3000K, 4000K and 5000K
- Adjustable time delay, lux level and sensitivity (sensor models only)

SPECIFICATIONS

	Single Head	Single Head Sensor	Double Head	Double Head Sensor
Ordering Code	MLXFP3451M	MLXFP3451MS	MLXFP3452M	MLXFP3452MS
Colour	Matt Black	Matt Black	Matt Black	Matt Black
Power Wattage	18W		36W	
Voltage	220-240Va.c. 50Hz			
Materials / Housing	Die case aluminium light head / plastic housing / glass light lens			
Colour Temperature	3000K / 4000K / 5000K		3000K / 4000K / 5000K	
Lumens Output	1600lm / 1700lm / 1650lm		3200lm / 3400lm / 3300lm	
IP Rating	IP65			
Beam Angle	120°			
CRI	Ra>80			
Rated Lifetime	25,000 hours @ Ta25°			
Sensor	-	PIR	-	PIR
Detection Range	-	150° up to 12M	-	150° up to 12M



COLOUR AND VARIANTS



MLXFP3451M
Matt Black



MLXFP3451MS
Matt Black




MLXFP3452M
Matt Black




MLXFP3452MS
Matt Black

DIMENSIONS


SINGLE HEAD

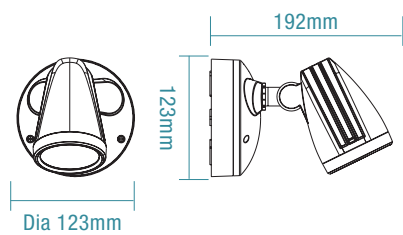


DOUBLE HEAD

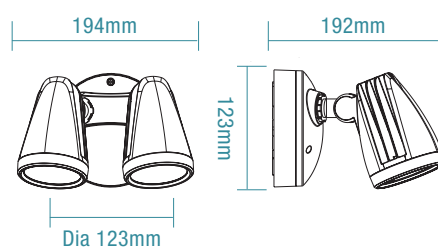

SINGLE HEAD SENSOR

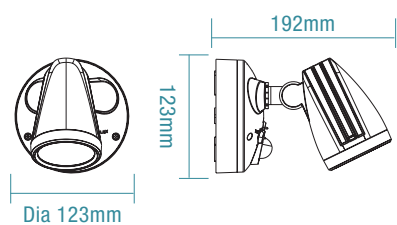

DOUBLE HEAD SENSOR

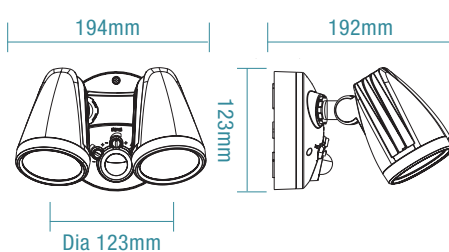

FORTRESS II



Replacement
Warranty




Ingress
Protection



Tricolour



Class I



FEATURES

- Robust designed exterior light for security lighting safety
- Ideal solution for entrances, alfresco and exterior applications
- Die-cast aluminium with UV stabilised plastic mounting base
- Fully adjustable head
- Quick connect base for fast and easy installation
- Manual override function
- Switchable colour temperature 3000K, 4000K and 5000K
- Adjustable time delay, lux level and sensitivity (sensor models only)

SPECIFICATIONS

	Single Head		Single Head Sensor		Double Head		Double Head Sensor	
Ordering Code	MLXF3451M	MLXF3451W	MLXF3451MS	MLXF3451WS	MLXF3452M	MLXF3452W	MLXF3452MS	MLXF3452WS
Colour	Matt Black	White	Matt Black	White	Matt Black	White	Matt Black	White
Power Wattage	15W				30W			
Voltage	220-240Va.c. 50Hz							
Materials / Housing	Die case aluminium light head / plastic housing / glass light lens							
Colour Temperature	3000K / 4000K / 5000K		3000K / 4000K / 5000K		3000K / 4000K / 5000K		3000K / 4000K / 5000K	
Lumens Output	1600lm / 1700lm / 1650lm		1600lm / 1700lm / 1650lm		3200lm / 3400lm / 3300lm		3200lm / 3400lm / 3300lm	
IP Rating	IP54							
Beam Angle	100°							
CRI	Ra>80							
Rated Lifetime	25,000 hours @ Ta25°							
Sensor	-	-	PIR		-	-	PIR	
Detection Range	-	-	150° up to 12M		-	-	150° up to 12M	



COLOUR AND VARIANTS



MLXF3451W
White



MLXF3451M
Matt Black



MLXF3452W
White



MLXF3452M
Matt Black



MLXF3451WS
White



MLXF3451MS
Matt Black




MLXF3452WS
White




MLXF3452MS
Matt Black

DIMENSIONS


SINGLE HEAD

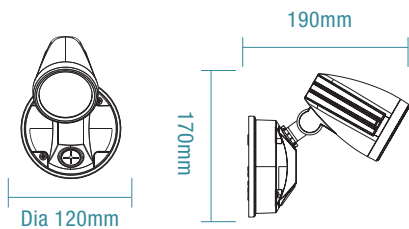


DOUBLE HEAD

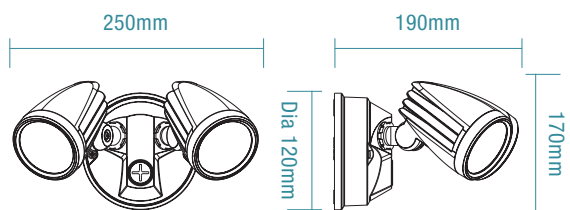

SINGLE HEAD SENSOR

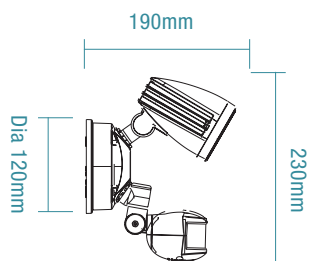

DOUBLE HEAD SENSOR

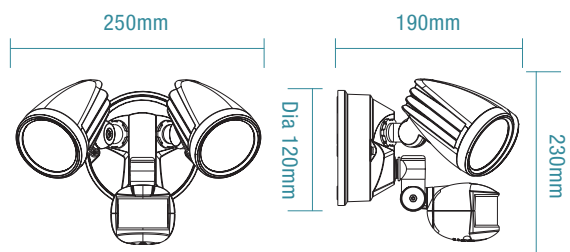

BANDIT



Replacement
Warranty



Ingress
Protection




Tricolour



Class II



Sensor
Output



FEATURES

- Modern designed exterior light for security lighting and safety
- Ideal solution for entrances, alfresco and exterior applications
- Polycarbonate head with UV stabilised ABS mounting base
- Fully adjustable head
- Sensor output relay control
- Extra screw terminal for looping
- Quick connect base for fast and easy installation
- Manual override function
- Switchable colour temperature 3000K, 4000K and 5000K
- Adjustable time delay, lux level and sensitivity (sensor models only)

SPECIFICATIONS

	Single Head	Single Head Sensor	Double Head	Double Head Sensor
Ordering Code	MLXB3451M	MLXB3451MS	MLXB3452M	MLXB3452MS
Colour	Matt Black	Matt Black	Matt Black	Matt Black
Power Wattage	12W		2 x 12W	
Voltage	220-240Va.c. 50Hz			
Materials / Housing	ABS			
Colour Temperature	3000K / 4000K / 5000K		3000K / 4000K / 5000K	
Lumens Output	1050lm / 1100lm / 1100lm		2100lm / 2200lm / 2200lm	
IP Rating	IP54			
Beam Angle	90°			
CRI	Ra>80			
Rated Lifetime	30,000 hours @ Ta25°			
Sensor	-	PIR	-	PIR
Detection Range	-	180° up to 16M	-	180° up to 16M



COLOUR AND VARIANTS



MLXB3451M
Matt Black



MLXB3451MS
Matt Black



MLXB3452M
Matt Black



MLXB3452MS
Matt Black


DIMENSIONS

SINGLE HEAD




Dia 120mm

SINGLE HEAD SENSOR

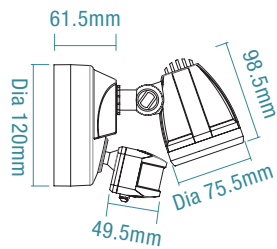


DOUBLE HEAD




Dia 120mm

DOUBLE HEAD SENSOR

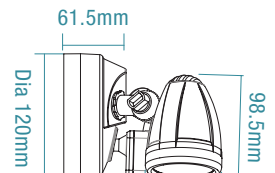

DEFENDER



FEATURES

- Robust designed exterior light for security lighting and safety
- Ideal solution for entrances, alfresco and exterior applications
- Aluminium/plastic with UV stabilised plastic mounting base
- Fully adjustable head
- Quick connect base for fast and easy installation
- Manual override function
- Switchable colour temperature 3000K, 4000K and 5000K
- Adjustable time delay, lux level and sensitivity (sensor models only)

SPECIFICATIONS

	Single Head		Single Head Sensor		Double Head		Double Head Sensor	
Ordering Code	MLXD3451M	MLXD3451W	MLXD3451MS	MLXD3451WS	MLXD3452M	MLXD3452W	MLXD3452MS	MLXD3452WS
Colour	Matt Black	White	Matt Black	White	Matt Black	White	Matt Black	White
Power Wattage	10W				20W			
Voltage	220-240Va.c. 50Hz							
Materials / Housing	Die case aluminium light head / plastic housing / glass light lens							
Colour Temperature	3000K / 4000K / 5000K		3000K / 4000K / 5000K		3000K / 4000K / 5000K		3000K / 4000K / 5000K	
Lumens Output	900lm / 1000lm / 1000lm		900lm / 1000lm / 1000lm		1800lm / 2000lm / 2000lm		1800lm / 2000lm / 2000lm	
IP Rating	IP54							
Beam Angle	100°							
CRI	Ra>80							
Rated Lifetime	25,000 hours @ Ta25°							
Sensor	-	-	PIR		-	-	PIR	
Detection Range	-	-	150° up to 12M		-	-	150° up to 12M	



COLOUR AND VARIANTS



MLXD3451W
White



MLXD3451M
Matt Black



MLXD3452W
White



MLXD3452M
Matt Black



MLXD3451WS
White



MLXD3451MS
Matt Black




MLXD3452WS
White




MLXD3452MS
Matt Black

DIMENSIONS


SINGLE HEAD

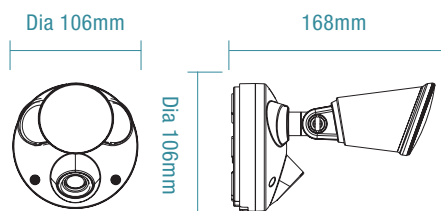


DOUBLE HEAD

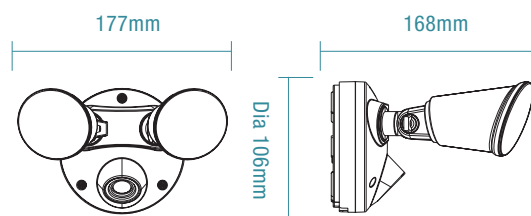

SINGLE HEAD SENSOR

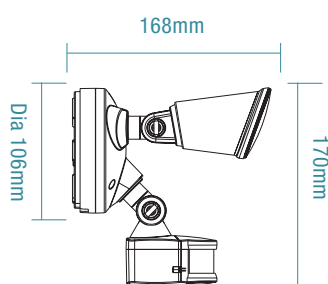

DOUBLE HEAD SENSOR

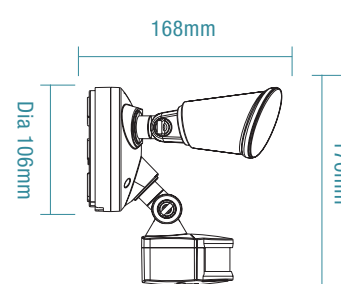





EXTERIOR LIGHTING - FLOODLIGHTS & BUNKER EMERGENCY LIGHTING LIGHTING ACCESSORIES

Martec® offers a full range of exterior products with features such as switchable colour temperature, different wattages and ingress protection ratings to suit any outdoor applications. With built in PIR or Microwave Motion sensors providing security and safety in all applications.

Opal	230
Cove.....	232
Slimfire	234
Dimmers / Lamps	235

OPAL



FEATURES

- Modern designed floodlight for security lighting and safety
- Ideal solution for entrances, alfresco and exterior applications
- Aluminium housing with tempered glass
- Stainless steel angled bracket for easy installation
- 6 different sizes from 20W to 200W
- Switchable colour temperature 3000K, 4000K and 5000K
- Adjustable time delay, lux level and sensitivity (sensor models only)
- Pre-wired with 600mm flex & plug

SPECIFICATIONS

	No Sensor						Sensor
Ordering Code	MLX034520M	MLX034530M	MLX034550M	MLX0345100M	MLX0345150M	MLX0345200M	MLX034550MS
Colour	Matt Black	Matt Black	Matt Black	Matt Black	Matt Black	Matt Black	Matt Black
Power Wattage	20W	30W	50W	100W	150W	200W	50W
Voltage	220-240Va.c. 50Hz						
Materials / Housing	Aluminium housing						
Colour Temperature	3000K / 4000K / 5000K						
Lumens Output	1600lm / 2000lm / 1700lm	2700lm / 3000lm / 2800lm	4700lm / 5000lm / 4900lm	8900lm / 10000lm / 9400lm	12700lm / 15000lm / 13200lm	16700lm / 20000lm / 17700lm	4700lm / 5000lm / 4900lm
IP Rating	IP65	IP65	IP65	IP65	IP65	IP65	IP44
Beam Angle	100°						
CRI	Ra>80						
Rated Lifetime	30,000 hours @ Ta25°						
Sensor	-	-	-	-	-	-	PIR
Detection Range	-	-	-	-	-	-	120° up to 10M



COLOUR AND VARIANTS



MLX034520M
Matt Black



MLX034530M
Matt Black



MLX034550M
Matt Black



MLX034550MS
Matt Black



MLX0345100M
Matt Black




MLX0345150M
Matt Black




MLX0345200M
Matt Black

DIMENSIONS


20W

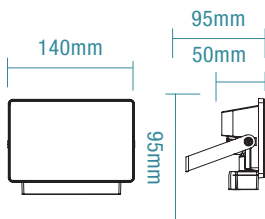


30W

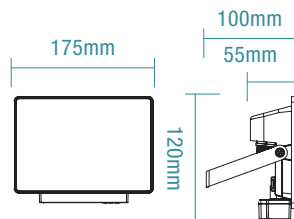


50W

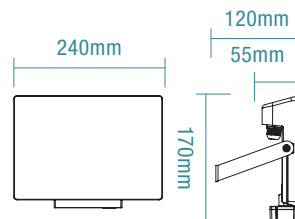


50W SENSOR

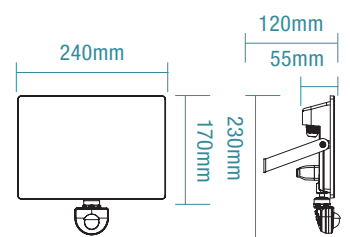


100W

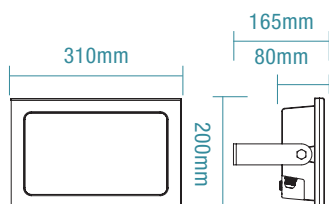

150W

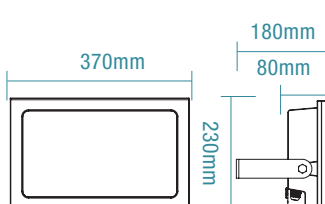

200W

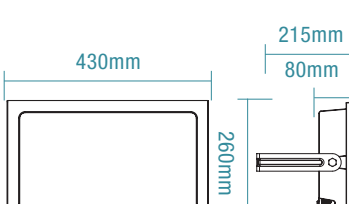

COVE



FEATURES

- Modern and robust designed exterior light
- Ideal solution for residential, apartments interior or exterior applications
- Polycarbonate body and diffuser
- Switchable colour temperature 3000K, 4000K and 6500K
- Supplied with UV resistant black clip on trim (white comes as standard)
- Mounting hardware included

SPECIFICATIONS

	Oval Shape	Oval Shape Sensor		Round Shape	Round Shape Sensor	
Ordering Code	MLXC034610	MLXC034615	MLXC034615S	MLXCR34610	MLXCR34615	MLXCR34615S
Colour	White	White	White	White	White	White
Power Wattage	10W	15W		10W	15W	
Voltage	220-240Va.c. 50Hz					
Materials / Housing	Polycarbonate body and diffuser					
Colour Temperature	3000K / 4000K / 6500K			3000K / 4000K / 6500K		
Lumens Output	1350lm / 1500lm / 1420lm			1350lm / 1500lm / 1420lm		
IP Rating				IP54		
Beam Angle				120°		
CRI				Ra>80		
Rated Lifetime	25,000 hours @ Ta25°					
Sensor	-	-	PIR	-	-	PIR
Detection Range	-	-	120° up to 8M	-	-	120° up to 8M





COLOUR AND VARIANTS



MLXC034610
White 200mm

MLXC034615
White 230mm

MLXC034615S
White 230mm




MLXCR34610
White 175mm

MLXCR34615
White 210mm

MLXCR34615S
White 210mm


ACCESSORIES

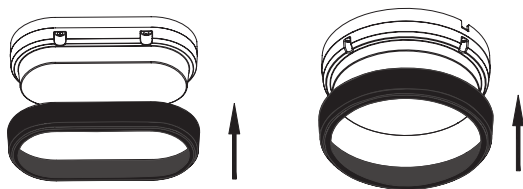


Supplied with black clip on trim.

DIMENSIONS


10W OVAL SHAPE

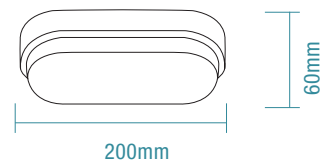


15W OVAL SHAPE

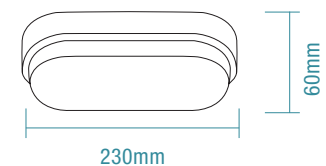

10W ROUND SHAPE

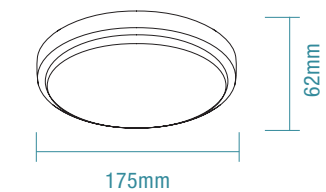

15W ROUND SHAPE

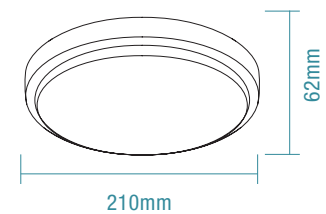

SLIMFIRE



FEATURES

- Available both in recessed and surface mounted
- D40 emergency classification
- Li-ion (LiCoO2) battery
- Compliance to AS/NZS 2293
- Supplied with flex and plug

COLOUR AND VARIANTS



TLSE23W
White Recessed




TLSE23WS
White Surface Mounted

SPECIFICATIONS


Ordering Guide	TLSE23W	TLSE23WS
Colour	White	White
Power Wattage	3W	
Voltage	220-240Va.c. 50Hz	
Materials / Housing	Polycarbonate housing	
Cutout Size	Dia 74-80mm	
IP Rating	IP20	

DIMENSIONS

TLSE23W

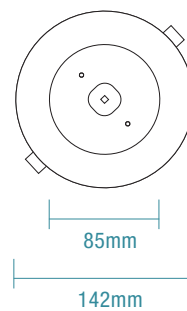

TLSE23WS

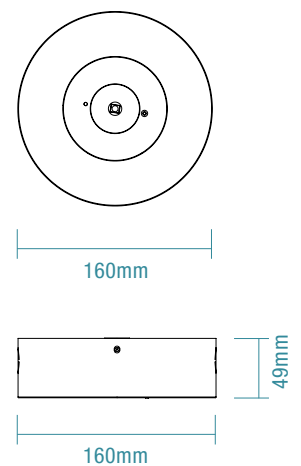

LIGHTING ACCESSORIES

DIMMERS



MTD350VAP



MTD350VAR

Ordering Code	Description
MTD350VAP	Push Button LED Light Dimmer Trailing Edge
MTD350VAR	Rotary LED Light Dimmer Trailing Edge

LAMPS



MRL400W



MRL500W



MRLP1000W



MBGU306



MBGU506



MBGU3060



MGU34506



MRL3K8W



MRL275W

Ordering Code	Description
MRL400W	400W heat tube (for Aspire use only)
MRL500W	1000W heat tube (for Linear Plus and Linear Mini Plus use only)
MRLP1000W	1000W heat tube (for Phoenix & Phoenix Mini use Only)
MBGU306	6W GU10 globe 3000K
MBGU506	6W GU10 globe 5000K
MBGU3060	Boss 9W LED Globe GU10 3000k 60 Degree COB Facetted Reflector
MGU34506	6W Tricolour GU10 Globe
MRL3K8W	8W R80 LED lamp 3000K
MRL275W	275W E27 heat lamp

LEDUCATION



Tricolour



CCT

COLOUR TEMPERATURES

Colour temperature, expressed in Kelvin (K), determines the appearance of light emitted by a bulb and significantly influences the ambience of a space. Higher Kelvin numbers indicate cooler, more energizing light, while lower Kelvin numbers produce warmer, more relaxing illumination. Understanding this, selecting the appropriate colour temperature is crucial for setting the desired mood.

Three primary options exist: 3000K (Warm White), emitting a cozy and inviting glow ideal for relaxing atmospheres; 4000K (Cool White), providing a balanced illumination suitable for various settings; and 5000K (Daylight), delivering crisp, invigorating light akin to natural daylight, perfect for spaces requiring heightened focus and alertness.

By choosing the right colour temperature, you can effectively tailor the lighting ambience to suit your preferences and enhance the overall feel of your environment.

IC RATING



IC-Rated

IC stands for **Insulation Contact** and determines whether downlights can safely come into contact with potentially flammable material or with any covering that might interfere with the luminaire's cooling system.

IC-4



IC4

- Suitable for residential or commercial use
- Fitting can be covered with building insulation
- Can be used where air transfer is not permitted or not desired between living space & roof space



IC

- Suitable for residential or commercial use
- Fitting can be loosely covered with building insulation
- Can be used where some air transfer is not permitted or desired between living space & roof



CA 90

- Suitable for residential or commercial use
- Fitting cannot be covered with building insulation
- Insulation can be placed against the sides of the fitting



DO NOT COVER

- Suitable for residential or commercial use in AU. Fitting cannot be covered with building insulation
- Insulation must be placed as per clearance distances according to manufactures installation guide



NON-IC

- Suitable for commercial use only
- Not suitable for use in residential dwellings or other places where insulation may be installed now or in the future
- Not tested for use with building insulation

IK RATING

IK stands for **Impact Protection**. It is a 1 to 10 system with a higher number indicating a more robust product able to withstand a greater impact. IK10 can withstand a 4 litre tin of paint dropped on it from just under half a meter.



Non-protected
No Protection



Protected against
1 joules impact
Equivalent to impact of 0.25kg
mass dropped from 400mm
above impacted surface



Protected against
0.14 joules impact
Equivalent to impact of 0.25kg
mass dropped from 56mm
above impacted surface



Protected against
2 joules impact
Equivalent to impact of 0.5kg
mass dropped from 400mm
above impacted surface



Protected against
0.2 joules impact
Equivalent to impact of 0.25kg
mass dropped from 80mm
above impacted surface



Protected against
5 joules impact
Equivalent to impact of 1.7kg
mass dropped from 300mm
above impacted surface



Protected against
0.35 joules impact
Equivalent to impact of 0.25kg
mass dropped from 140mm
above impacted surface



Protected against
10 joules impact
Equivalent to impact of 5kg
mass dropped from 200mm
above impacted surface



Protected against
0.5 joules impact
Equivalent to impact of 0.25kg
mass dropped from 200mm
above impacted surface



Protected against
20 joules impact
Equivalent to impact of 5kg
mass dropped from 400mm
above impacted surface



Protected against
0.7 joules impact
Equivalent to impact of 0.25kg
mass dropped from 280mm
above impacted surface

IP RATING

IP stands for **Ingress Protection**. It is a way of rating how well protected the device is from things that can get into it. The first number rating solid objects and dust from 1 to 6. The second figure is the water protection rating. The range is from 1 for slow dripping water from above up to 8 for a device that can be submerged.



SOLIDS



1

Protected against a solid object greater than 50mm such as a hand.



2

Protected against a solid object greater than 12.5mm such as a finger.



3

Protected against a solid object greater than 2.5mm such as a screwdriver.



4

Protected against a solid object greater than 1mm such as a wire.



5

Dust protected. Limited ingress of dust permitted. Will not interfere with operation of the equipment. 2 to 8 hours.



6

Dust Tight. No ingress of dust. 2 to 8 hours.

WATER



1

Protected against vertically falling drops of water. Limited ingress permitted.



2

Protected against vertically falling drops of water with enclosure tilted up to 15 degrees from the vertical. Limited ingress permitted.



3

Protected against sprays of water up to 60 degrees from the vertical. Limited ingress permitted for 3 minutes.



4

Protected against water splashes from all directions. Limited ingress permitted.



5

Protected against jets of water. Limited ingress permitted.



6

Water from heavy seas or water projected in powerful jets shall not enter the enclosure in harmful quantities.



7

Protected against vertically falling drops of water. Protection against the effects of immersion in water between 15cm and 1m for 30 minutes



8

Protection against the effects of immersion in water under pressure for long periods.

IPX RATING

IPX stands for **Ingress Protection**. The "X" simply means that the value for that number is missing. Therefore, the product has no protection against solids like dust and dirt.



WATER



0

No protection.



1

Protected against condensation or dripping water falling vertically.



2

Protected against spraying water when tilted up to 15 degrees vertically.



3

Protected against spraying water when tilted up to 60 degrees vertically.



4

Protected against splashing water from any angle.



5

Protected against low pressure water stream from any angle.



6

Protected against high pressure water stream from any angle.



7

Protected against water immersion. Immersion for 30 minutes at a depth of up to 1 meter.



8

Protected against continual water submersion in under water conditions.

PRODUCT INDEX

COOLING

Model No.	Page No.	Model No.	Page No.	Model No.	Page No.
DCREMAFLT	109	MAFML3MR	83	MDRDWIFI36AB	45,107
DLS1343B	94,95	MAFML3WR	83	MDRDWIFI36G	41,107
DLS1343M	94,95	MAFMMR	83	MDRDWIFI36M	25,27,31,35,41,45,49,51,61, 63,67,69,71,107
DLS1343W	94,95	MAFMWR	83	MDRDWIFI36OB	71,107
DLS1344B	94,95	MCDC1243M	52	MDRDWIFI36W	25,27,31,35,41,45,49,51,61, 63,67,69,71,107
DLS1344M	94,95	MCDC1243W	52	MDRDWIFI72M	25,27,31,35,41,45,49,51,61, 63,67,69,71,107
DLS1344W	94,95	MCDC124M	52	MDRDWIFI72W	25,27,31,35,41,45,49,51,61, 63,67,69,71,107
DLS134B	94,95	MCDC124W	52	MEDC1233M	31
DLS134M	94,95	MDCM1333M	39	MEDC1233MW	31
DLS134W	94,95	MDCM1333W	39	MEDC1233W	31
DLSEGLASS	108	MDCM1333WO	39	MEDC123M	31
DLSGLASS	108	MDCM133M	39	MEDC123MW	31
DREPO36BN	99,107	MDCM133W	39	MEDC123W	31
DREPO36W	99,107	MDCM133WO	39	MFDC1333M	54,55
DREPO72BN	99,107	MDDC1333M	56	MFDC1333W	54,55
DREPO72W	99,107	MDDC133M	56	MFDC133M	54,55
DRP36SS	99,107	MDF1243M	91	MFDC133W	54,55
DRP72SS	99,107	MDF1243W	91	MGDC1333M	50,51
FSIREM	104	MDF124M	91	MGDC1333W	50,51
FSL1243M	92,93	MDF124W	91	MGDC133M	50,51
FSL1243W	92,93	MDF1343M	91	MGDC133W	50,51
FSL1243WR	92,93	MDF1343W	91	MGF1533OT	50,51
FSL1244M	92,93	MDF134M	91	MGF153OT	50,51
FSL1244W	92,93	MDF134W	91	MGFDIFF	108
FSL1244WR	92,93	MDF1443M	91	MHDC1343M	49
FSL124M	92,93	MDF1443W	91	MHDC1343W	49
FSL124W	92,93	MDF144M	91	MHDC1343WO	49
FSLEDIFF	108	MDF144W	91	MHDC134M	49
MADC1233MMR	35	MDFIIDIFF	108	MHDC134W	49
MADC1233WOR	35	MDRA36M	91,93,95,97,107	MHDC134WO	49
MADC1233WWR	35	MDRA36O	101,107	MHDC134M	49
MADC123MMR	35	MDRA36W	93,95,97,107	MHDC134W	49
MADC123WOR	35	MDRA36WS	91,107	MHDC134WO	49
MADC123WWR	35	MDRA72M	91,93,95,97,107	MKDC1243OB	70,71
MADC1333MMR	35	MDRA72O	101,107	MKDC1243W	70,71
MADC1333WOR	35	MDRA72W	93,95,97,107	MKDC124OB	70,71
MADC1333WWR	35	MDRA72WS	91,107	MKDC124W	70,71
MADC133MMR	35	MDRD36B	107	MMDC1033MW	62,63
MADC133WOR	35	MDRD36M	79,83,85,107	MMDC1033WN	62,63
MADC133WWR	35	MDRD36MT	77,107	MMDC103MW	62,63
MAF168BR	84,85	MDRD36N	83,85,107	MMDC103WN	62,63
MAF168MR	84,85	MDRD36OT	77,107	MMDC1333MW	62,63
MAF168WR	84,85	MDRD36W	83,85,107	MMDC1333WN	62,63
MAF180B	83	MDRD36WS	79,107	MMDC133MW	62,63
MAF180M	83	MDRD36WST	77,107	MMDC133WN	62,63
MAF180W	83	MDRD72B	107	MNB180N	68,69
MAF210B	83	MDRD72M	79,83,85,107	MNB180W	68,69
MAF210M	83	MDRD72MT	77,107	MNB180WW	68,69
MAF210W	83	MDRD72OT	77,107	MNB220N	68,69
MAFDIFF	108	MDRD72W	83,85,107	MNB220W	68,69
MAFMBR	83	MDRD72WS	79,107	MNB220WW	68,69
MAFML3BR	83	MDRD72WST	77,107	MNDC1233MW	67



Model No.	Page No.	Model No.	Page No.	Model No.	Page No.
MNDC1233WN	67	MSDC1333W	40,41	SPDCRECMAFMLT	109
MNDC1233WW	67	MSDC133GC	40,41	SPDCRECMAFMNL	109
MNDC123MW	67	MSDC133M	40,41	SPDCRECMAFNL	109
MNDC123WN	67	MSDC133W	40,41	SPDCRECMDCMLT	109
MNDC123WW	67	MSDCDIFF	108	SPDCRECMDCMNL	109
MNDC1433MW	67	MVDC1333M	25	SPDCRECMDDCLT	109
MNDC1433WN	67	MVDC1333W	25	SPDCRECMDDCNL	109
MNDC1433WW	67	MVDC133M	25	SPDCRECMDFLT	109
MNDC143MW	67	MVDC133W	25	SPDCRECMDFNL	109
MNDC143WN	67	MVDC1343M	26,27	SPDCRECMEDCLT	109
MNDC143WW	67	MVDC1343W	26,27	SPDCRECMEDCNL	109
MNDCDIFF	108	MVDC134M	26,27	SPDCRECMMDCLT	109
MNDCM	68,69	MVDC134W	26,27	SPDCRECMMDCNL	109
MNDCW	68,69	MVDCDIFF	108	SPDCRECMNDC12LT	109
MNF1433MMR	77	MWF1333MMR	78,79	SPDCRECMNDC12NL	109
MNF1433OWR	77	MWF1333WSR	78,79	SPDCRECMNDC14LT	109
MNF1433WOR	77	MWF133MMR	78,79	SPDCRECMNDC14NL	109
MNF1433WWR	77	MWF133WSR	78,79	SPDCRECMNDC22NL	109
MNF143MMR	77	MWF1633MMR	78,79	SPDCRECMNFLT	109
MNF143OWR	77	MWF1633WSR	78,79	SPDCRECMNFNL	109
MNF143WOR	77	MWF163MMR	78,79	SPDCRECMSDCLT	109
MNF143WWR	77	MWF163WSR	78,79	SPDCRECMSDCNL	109
MNFDIFF	108	MWFDIFF	108	SPDCRECMVDCLT	109
MPF120WH	98,99	PLKBN	99,108	SPDCRECMVDCNL	109
MPF130WH	98,99	PLKSS	99,108	SPDCRECMWFLT	109
MPF140WH	98,99	PLKWH	99,108	SPDCRECMWFNL	109
MPF3042SS	98,99	SPACRECFSL	109	SPDCRECWIFILT	109
MPF3043SS	98,99	SPACTRANSFSL	109	SPDCRECWIFINL	109
MPF3044SS	98,99	SPB133MADCLTW	110	SPDCTRANSLT	109
MPF3162SS	98,99	SPB133MADCNLO	110	SPDCTRANSNL	109
MPF3163SS	98,99	SPB133MADCNLW	110	SPDCTRANSWIFILT	109
MPF3164SS	98,99	SPB133MVDCM	110	SPDCTRANSWIFINL	109
MPLCDS	91,93,95,97	SPB133MVDCW	110	SPLKDR	109
MPREMS	91,93,95,97	SPB134MVDCM	110	SPMDCMLKIT	108
MRDC1333ACH	45	SPB134MVDCW	110	SPMEDCLKIT	108
MRDC1333M	45	SPB13MDDCM	110	SPMLLAKIT345	108
MRDC1333W	45	SPB13MRDCCH	110	SPMNDCLKITM	108
MRDC133ACH	45	SPB13MRDCM	110	SPMNDCLKITW	108
MRDC133M	45	SPB13MRDCW	110	SPMRDCLKITA	108
MRDC133W	45	SPBPMDDCM	110	SPMRDCLKITM	108
MRDCDIFF	108	SPBPMNDC22W	110	SPMRDCLKITW	108
MRF1343W	96,97	SPBPMNDCM	110	SPMSDCLKITM	108
MRF134B	96,97	SPBPMNDCW	110	SPMSDCLKITW	108
MRF134M	96,97	SPBPMRDCA	110	SPMVDCLKITM	108
MRF134W	96,97	SPBPMRDCM	110	SPMVDCLKITW	108
MRFDIFF	108	SPBPMRDCW	110	SPRECMRDCLT	109
MSDC1033M	40,41	SPBPMSDCM	110	SPRECMRDCNL	109
MSDC1033W	40,41	SPBPMSDCW	110		
MSDC103M	40,41	SPBPMVDCM	110		
MSDC103W	40,41	SPBPMVDCW	110		
MSDC1333GC	40,41	SPDCRECMADCLT	109		
MSDC1333M	40,41	SPDCRECMADCNL	109		

PRODUCT INDEX


HEATING & EXHAUST FANS

Model No.	Page No.
MBGU34506	117,119,149
MBHA800W	126
MBHC1LW	134
MBHC2LW	134
MBHC4LW	134
MBHF2LW	128,129
MBHF4LW	128,129
MBHLP1000W	116,117
MBHMP1000W	118,119
MBHN2LW	130,131
MBHN4LW	130,131
MBHP1000M	122,123
MBHP1000W	122,123
MBHP2LW	130,131
MBHP4LW	130,131
MBHPM1000M	124,125
MBHPM1000W	124,125
MBHREM	116-119, 122-135, 148
MBHT2000W	137
MBHU1LW	136
MBHV2000W	120,121
MRL275W	129,131,133,135,136,000
MRL3K8W	135,149
MRL400W	127,149
MRL500W	117,119,149
MRLP1000W	123,125,149
MXFC20W	144
MXFC25W	144
MXFFR25W	140,141
MXFFR30W	140,141
MXFFS25W	140,141
MXFFS30W	140,141
MXFLFR25W	140,141
MXFLFR30W	140,141
MXFLFS25W	140,141
MXFLFS30W	140,141
MXFSLR20M	142,143
MXFSLR20W	142,143
MXFSLR25M	142,143
MXFSLR25W	142,143
MXFSR20W	142,143
MXFSR25W	142,143
MXFSS20W	142,143
MXFSS25W	142,143

LIGHTING

Model No.	Page No.	Model No.	Page No.	Model No.	Page No.
MBGU306	235	MLXCO34610	232, 233	MLXR3454W	209
MBGU3060	235	MLXCO34615	232, 233	MLXS34510M	193
MBGU506	235	MLXCO34615S	232, 233	MLXS34510W	193
MLBF12345W	181	MLXCR34610	232, 233	MLXT3454M	208
MLBF60345W	181	MLXCR34615	232, 233	MLXT3454W	208
MLCO34515MD	174, 175	MLXCR34615S	232, 233	MLXT3458M	197
MLCO34515WD	174, 175	MLXD34518M	226, 227	MLXT3458W	197
MLCO34524MD	174, 175	MLXD34518W	226, 227	MLXT3459M	197
MLCO34524WD	174, 175	MLXD3451M	226, 227	MLXT3459W	197
MLCO34535MD	174, 175	MLXD3451MS	226, 227	MLXTE27M	195
MLCO34535WD	174, 175	MLXD3451W	226, 227	MLXTE27W	195
MLCS2M	216, 217	MLXD3451WS	226, 227	MLXVE27FLM	200
MLCS2W	216, 217	MLXD3452M	226, 227	MLXVE27FSM	200
MLCS3M	216, 217	MLXD3452MS	226, 227	MLXVE27MS	200
MLCS3W	216, 217	MLXD3452W	226, 227	MLXVE27WBM	200
MLCS4M	216, 217	MLXD3452WS	226, 227	MTD350VAP	154-175, 235
MLCS4W	216, 217	MLXF3451M	222, 225	MTD350VAR	154-175, 235
MLFO34516WD	172, 173	MLXF3451MS	222, 226	TLAD34510WD	158, 159
MLFO34518MD	172, 173	MLXF3451W	222, 225	TLAG34510WD	158, 159
MLFO34518WD	172, 173	MLXF3451WS	222, 226	TLAM34510WD	158, 159
MLFO34518WS	172, 173	MLXF3452M	222, 223	TLBD34510MD	163
MLFO34524MD	172, 173	MLXF3452MS	222, 224	TLBD34510WD	163
MLFO34524WD	172, 173	MLXF3452W	222, 223	TLCD34510MD	156, 157
MLFO34532MD	172, 173	MLXF3452WS	222, 224	TLCD34510WD	156, 157
MLFO34532WD	172, 173	MLXFP3451M	220, 221	TLDB34620	182, 183
MLFO34538WD	172, 173	MLXFP3451MS	220, 221	TLDB34640	182, 183
MLOO34512	176, 177	MLXFP3452M	220, 221	TLDD34523WD	166
MLOO34518	176, 177	MLXFP3452MS	220, 221	TLKD34510MD	168, 169
MLOO34524	176, 177	MLXI34510M	190	TLKD34510WD	168, 169
MLOO34528	176, 177	MLXI34510W	190	TLND3459WD	164
MLPB12345W	180	MLXI3456M	190	TLPD34510WD	161
MLPB60345W	180	MLXI3456W	190	TLRD3459MD	154, 155
MLXA34510M	201	MLXK34510M	192	TLRD3459WD	154, 155
MLXA34510W	201	MLXK34510W	192	TLSE23W	234
MLXA3453M	210	MLXM34510M	191	TLSE23WS	234
MLXA3453W	210	MLXM34510W	191	TLTD34510MD	162
MLXB3451M	224, 225	MLXM3456M	191	TLTD34510WD	162
MLXB3451MS	224, 225	MLXM3456W	191	TLUD34510WD	160
MLXB3452M	224, 225	MLXN3456M	194	TLVD3459WD	165
MLXB3452MS	224, 225	MLXN3456W	194	TLWB34618	184, 185
MLXBE27M	203	MLXNL34510M	194	TLWB34639	184, 185
MLXBE27R	203	MLXNL34510W	194	TLZD3459WDS	167
MLXC33M	206	MLXO345100M	230, 231		
MLXC33W	206	MLXO345150M	230, 231		
MLXC34512M	202	MLXO345200M	230, 231		
MLXC34512W	202	MLXO34520M	230, 231		
MLXC3451M	214, 215	MLXO34530M	230, 231		
MLXC3451W	214, 215	MLXO34550M	230, 231		
MLXC3452M	214, 215	MLXO34550MS	230, 231		
MLXC3452MS	214, 215	MLXQ3453M	207		
MLXC3452W	214, 215	MLXQ3453W	207		
MLXC3452WS	214, 215	MLXR3454M	209		

OUR SITES & TOOLS

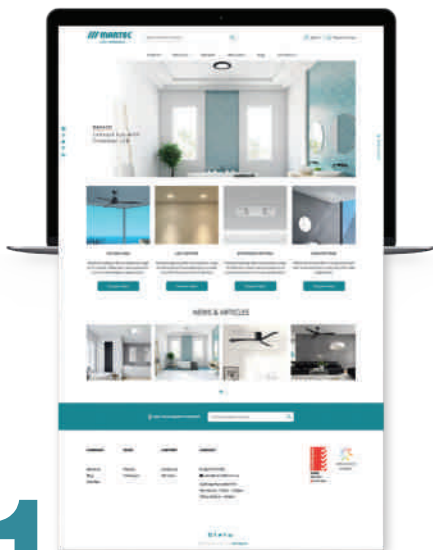

1

Website

www.martecaustralia.com.au

Martec®'s website is meticulously crafted to offer a seamless and intuitive user experience, ensuring easy access to information with just a few clicks. Our platform showcases the entire product portfolio, accompanied by detailed technical specifications, all conveniently located in one central hub.

Under the resources menu, users can explore catalogues and utilize the product finder tool to identify the perfect Martec® solution for their specific job or application, whether they're on-site or off-site.

Moreover, our website features a stockist locator, simplifying the purchasing process by helping users find nearby retailers. Additionally, valuable how-to information, including blog articles, FAQ and industry standards, is readily available, enriching users' knowledge and empowering informed decision-making.

With Martec®'s user-friendly website, accessing essential information and finding the right products has never been easier.



2

Ceiling Fan Calculator

Introducing Martec®'s Ceiling Fan Calculator, designed to simplify your selection process and ensure you choose the perfect ceiling fan for your specific application.

Whether you're working on-site or off-site, our intuitive calculator provides you with the necessary guidance to find the ideal Martec® ceiling fan, whether for indoor or tropical environments. By inputting key parameters such as room size, ceiling height, and preferred features, this tool swiftly identifies the most suitable options from our extensive range.

With Martec®'s Ceiling Fan Calculator at your disposal, making informed decisions about your ceiling fan installation has never been more convenient.



3

Bathroom Heaters & Exhaust Fans Calculator

Introducing Martec®'s Bathroom Heater and Exhaust Fan Calculator, a user-friendly tool designed to streamline your selection process and identify the perfect heating or ventilation solution for your specific job and application.

Whether you're on-site or off-site, this calculator provides you with the necessary guidance to find the ideal Martec® bathroom heater or exhaust fan. Simply input key parameters such as room size, ventilation requirements, and desired features, and the calculator will swiftly recommend the most suitable options from our extensive range.

With Martec®'s Bathroom Heater and Exhaust Fan Calculator, making informed decisions about your heating and ventilation needs has never been more convenient.





4

Stockist Locator

Martec® makes it effortless to find our products at your nearest wholesalers and retailers. Utilize our convenient Stockist Locator by simply entering your suburb and desired travel distance, and we'll pinpoint the nearest locations where Martec® products are available.

Can't find a nearby stockist on our locator? No worries! Just send us a request, and we'll assist you in locating the products you need. Martec® is committed to ensuring that our quality products are easily accessible to our valued customers.



5

Online Ordering Portal




Introducing Martec®'s Online Ordering Portal exclusively designed for our trade customers. Gain access to our latest range of products including ceiling fans, LED lighting, bathroom heaters, and exhaust fans, all at your fingertips.

With this portal, you can conveniently check product information, stock availability, pricing, and estimated time of arrival for incoming shipments.

Ready to streamline your ordering process? Simply request access by emailing us at marketing@martecld.com.au.

Martec® is dedicated to providing our trade partners with efficient tools to support their business needs.

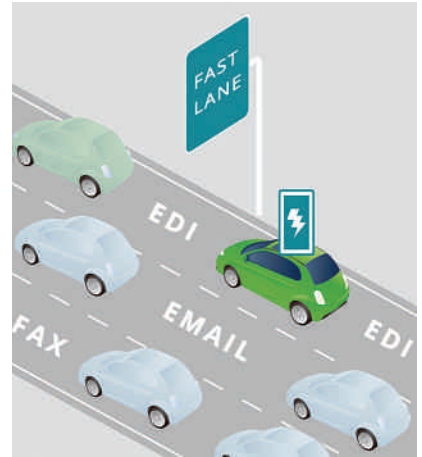

6

Electronic Database Interface (EDI)

EDI revolutionizes the ordering process, offering a paperless and seamless system for exchanging vital information such as purchase orders and invoices digitally with other businesses. This digital exchange enhances accuracy and accelerates communication, ensuring greater efficiency and speed in transactions.

EDI orders are seamlessly integrated into our Enterprise Resource Planning (ERP) system, automating processes and facilitating timely delivery by swiftly releasing them to the warehouse for picking. By eliminating manual data entry, EDI serves as an express lane ordering process, effectively eliminating errors and streamlining operations for enhanced productivity and customer satisfaction.

WARRANTY

This is a guide only and is current at the time of publication.
Please check the website for current information for specified product.
www.martecaustralia.com.au/warranty-statement/



Ceiling Fans

6 Years warranty
(3 Year In-home + additional 3 Year Replacement on the motor only.)

Warranty



Remote Control Kits

1 Year In-Home Warranty

In-Home Warranty



Accessories

1 Year Replacement Warranty

Replacement Warranty



Bathroom Heaters & Exhaust Fans LED

2 Year In-Home Warranty
(Thermo has 1 Year Replacement Warranty)

In-Home Warranty



Exhaust Fans

2 Year Replacement Warranty

Replacement Warranty



Accessories

1 Year Replacement Warranty

Replacement Warranty



Downlights

5 Year Replacement Warranty
(Niko & Vito has 2 Year Replacement Warranty)

Replacement Warranty



Surface Mounted Lighting & Exterior Lighting

2 Year Replacement Warranty
(Fino has 5 Year Replacement Warranty)

Replacement Warranty



Accessories

1 Year Replacement Warranty

Replacement Warranty



QUALITY MANAGEMENT & SUSTAINABILITY

Business Continuous Improvement

Martec® is a company with a strong commitment to the principles of quality, service and attention to detail ensures we transform these values into unique and dynamic outcomes that are second to none.

In order to attain and maintain these objectives, Martec® has implemented a quality management process and system which we are continuing to improve and evaluate our business process to sustain these objectives.

Product Development

Martec product development team keeps abreast of the trends and advances in technology to ensure that products continue to improve in line with market expectations. Refinements to existing products are regularly introduced to increase convenience and simplicity to customer's life. And we are enhancing this practice to position our products future ready for Internet of Things (IoT).

Martec team has all the necessary certifications, skill and local experience to assure all our products are compliance to Australian and New Zealand standards (AS/NZS 60598.1, AS/NZS 60335.1 & 60335.2.80) and meet regulatory requirements of RCM and SAA approval.



**WE DO
MORE THAN
YOU THINK...**



CONTACT

MONDAY TO FRIDAY



Warehouse hours: 7:30am – 3:30pm



sales@martecLtd.com.au



Office hours: 8:00am – 4:00pm



www.martecaustralia.com.au



(02) 8778 7500



Martec® is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. Air movements figures quoted are guide only. All measurements are in millimetres unless otherwise stated.

For In-Home Warranty, please visit website for details <https://www.martecaustralia.com.au/warranty-statement/>

The right is reserved to change specifications without prior notification or public announcement. All goods supplied by the company are supplied subject to the company's General Conditions of Sale, a copy of which is available on request.



