


# MARTEC PRINCE CEILING FAN REMOTE CONTROLLER OPERATION AND INSTALLATION INSTRUCTIONS (MPAPP)

## IMPORTANT

1. Read and save these instructions.
2. Please note that all fixed wiring appliances must be installed by a qualified electrician.
3. The supply to the remote-control receiver must be connected through a mains switch, i.e. existing wall switch, to isolate the power.
4. Disconnect from power supply at wall switch before working on remote control receiver or ceiling fan.
5. Install receiver into the ceiling fan canopy of the fan to ensure proper protection (Do not install in ceiling cavity as this will void warranty).
6. This unit is to be used for the control of a ceiling fan with a AC230/240V 50Hz power supply only.
7. Do not install in damp locations or immerse into water (For indoor use only).
8. Do not pull on or cut leads shorter.
9. Do not drop or bump the unit.
10. Please ensure plugs are in the correct position i.e. AC power input to the AC power and to the fan output of the fan. If in the incorrect position, receiver will be damaged, and will not be covered under warranty.
11. **PLEASE NOTE:** The battery will weaken with age and should be replaced regularly before leaking takes place as this will damage the transmitter. Dispose of used battery properly, keep the battery out of reach of children. Leaking batteries are not covered under warranty.
12. **CAUTION:** To reduce the risk of fire or injury, do not use this product in conjunction with any variable (rheostat) wall control.

## INSTALLATION INSTRUCTIONS

**CAUTION!** INCORRECT WIRE CONNECTION WILL DAMAGE THIS RECEIVER. PLEASE ENSURE 240V IS TO INPUT AND MAKE SURE POWER IS COMPLETELY OFF WHEN INSTALLING THE RECIEVER UNIT OR A VOLTAGE SURGE MAY BLOW THE CIRCUIT BOARD.

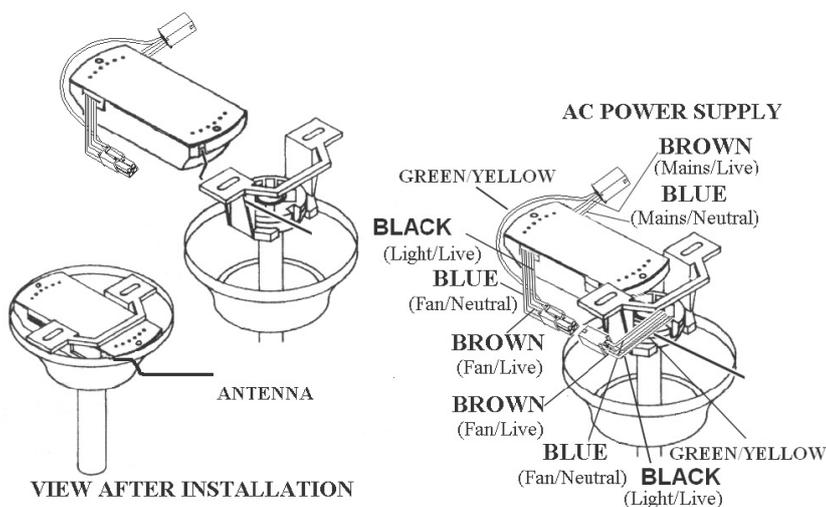


Once the connection has been made, the receiver inserts into the drop rod hanging bracket. The canopy comes up to cover the receiver and bracket.

**CAUTION:** When putting canopy of the fan onto mounting bracket, please ensure that wires are completely tucked away to avoid canopy rupturing the wires and causing a short circuit.

## LEARNING PROCESS (Programming)


**NOTE:** The Hand Held Remote Control System is equipped with a learning frequency function which has code combinations to prevent potential interference from other remote units.

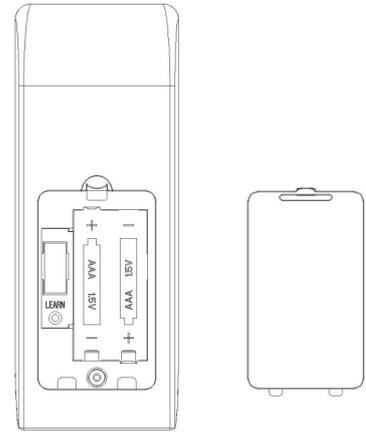

- 01** Install the AAA 1.5V\*2 batteries. Within 30 seconds of turning the Receivers AC power ON. Press the transmitter's "LEARN" key.
- 02** Hold the "LEARN" key for over 2 seconds, once the receiver has detected the frequency, Light will flash 2 times which indicates that learning process finished.

**Please note:** The transmitter can be programmed to one or more receivers, so during the programming process, please refrain from attempting to program multiple receivers at the same time. Please ensure power is switched off for all/any additional receivers that are installed in the same premises when wanting to individually pair a desired transmitter to a particular receiver. Failure to ensure power is off for all other receivers may result in the transmitter being paired to all receivers instead.

### TRANSMITTER

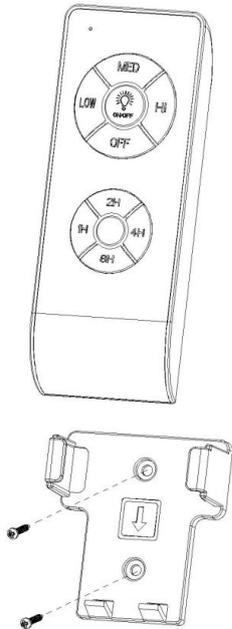

Installation of Transmitter Wall Mount Holder with two screws.

### FUNCTIONS OF TRANSMITTER

**HIGH** - Turn on the fan at high speed

**MED** - Turn on the fan at medium speed

**LOW** - Turn on the fan at low speed

**OFF** - Turn off the ceiling fan.

**LIGHT ON/OFF** Press and release immediately to turn on or off the light (if the light is step dim enabled the light will drop one level).

**1H TIMER**- Ceiling fan will turn off after 1 hour automatically.

**2H TIMER**- Ceiling fan will turn off after 2 hours automatically.

**4H TIMER**- Ceiling fan will turn off after 4 hours automatically.

**8H TIMER**- Ceiling fan will turn off after 8 hours automatically.

**LIGHT**- Press light button "on" and "off" repeatedly to operate the light function of your ceiling fan lighting (if applicable).

**Download the FREE Martec OneTouch from the App Store or Google Play today!**

The OneTouch app operates seamlessly with handheld remote transmitter to enable control of multiple compatible Martec Ceiling Fans with advanced timer function and security settings.

- Turn on your smart phone or device's Bluetooth settings on
- Turn on the AC power of the ceiling fan with the remote-control kit installed
- Tap the "Done" icon on the Martec OneTouch app for pairing code. Fill in the location name
- Martec OneTouch, convenience at your fingertips!



**Martec OneTouch**  
FREE DOWNLOAD



For detailed tutorial of the Martec OneTouch App Controller, visit our website for more information.